


軸承規格表

	2300			23100			23200			小型軸承		
	d	D	B	d	D	B	d	D	B	d	D	B
22	110	170	45	110	180	56	110	200	69.8	603	3	9 3
24	120	180	46	120	200	62	120	215	76	604	4	12 4
26	130	200	52	130	210	64	130	230	80	605	5	14 5
28	140	210	54	140	225	68	140	250	88	606	6	17 6
30	150	225	56	150	250	80	150	270	96	607	7	19 6
32	160	240	60	160	270	86	160	290	104	608	8	22 7
34	170	260	67	170	280	88	170	310	110	609	9	24 7
36	180	280	74	180	300	96	180	320	112	623	3	10 4
38	190	290	75	190	320	104	190	340	120	624	4	13 5
40	200	310	82	200	340	112	200	360	128	625	5	16 5
44	220	340	90	220	370	120	220	400	144	626	6	19 6
48	240	360	92	240	400	128	240	440	160	627	7	22 7
52	260	400	104	260	460	144	260	480	174	628	8	24 8
56	280	420	106	280	500	146	280	500	176	629	9	26 8
59	300	460	118	300	540	160	300	540	192	634	4	16 5
64	320	480	121	320	580	176	320	580	208	635	5	19 6
68	340	520	133	340	600	190						

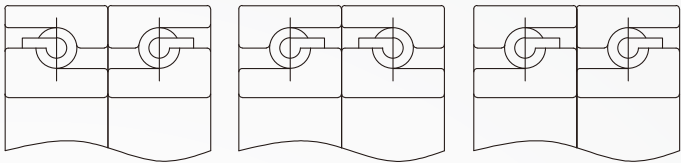

DB形

DF形

DT形

支援軸承

規格	d	D	B	2B	r	r1
20TAA04DF(DB)	20	47	15	30	1.5	0.5
25TAA06DF(DB)	25	62	15	30	1.5	0.5
30TAA06DF(DB)	30	62	15	30	1.5	0.5
35TAA07DF(DB)	35	72	15	30	1.5	0.5
40TAA07DF(DB)	40	72	15	30	1.5	0.5
40TAA09DF(DB)	40	90	20	40	1.0	1.0
45TAA10DF(DB)	45	100	20	40	1.5	0.5
50TAA10DF(DB)	50	100	20	40	1.5	0.5
55TAA12DF(DB)	55	120	20	40	1.0	1.0
60TAA12DF(DB)	60	120	20	40	1.0	1.0


d 內徑 D 外徑 B 厚度			6000	6200 7200 1200 NU200 30200	6300 7300 1300 NU300 30300	6400 NU400	2200 NU2200 22200 32200	2300 NU2300 22300 32300	5200 2300	5300 3300	7000		
	16000											6900	
	d	D B										d	D B
0				10 26 8	10 30 9	10 35 11		10 30 14	10 35 17	10 30 14.3		10 26 8	
1				12 28 8	12 32 10	12 37 12	12 42 13	12 32 14	12 37 17	12 32 15.9		12 28 8	
2	15 32 8			15 32 9	15 35 11	15 42 13	15 52 15	15 35 14	15 42 17	15 35 15.9		15 32 9	
3	17 35 8	17 30 7		17 35 10	17 40 12	17 47 14	17 62 17	17 40 16	17 47 19	17 40 17.5	17 47 22.2	17 35 10	
4	20 42 8	20 37 9		20 42 12	20 47 14	20 52 15	20 72 19	20 47 18	20 52 21	20 47 20.6	20 52 22.2	20 42 12	
5	25 47 8	25 42 9		25 47 12	25 52 15	25 62 17	25 88 21	25 52 18	25 62 24	25 52 20.6	25 62 25.4	25 47 12	
6	30 55 9	30 47 9		30 55 13	30 62 16	30 72 19	30 90 23	30 62 20	30 72 27	30 62 23.8	30 72 30.1	30 55 13	
7	35 62 9	35 55 10		35 62 14	35 72 17	35 80 21	35 100 25	35 72 23	35 80 31	35 72 26.9	35 80 34.9	35 62 14	
8	40 68 9	40 62 12		40 68 15	40 80 18	40 90 23	40 110 27	40 80 23	40 90 33	40 80 30.1	40 90 36.5	40 68 15	
9	45 75 10	45 68 12		45 75 16	45 85 19	45 100 25	45 120 29	45 85 23	45 100 36	45 85 30.1	45 100 39.6	45 75 16	
10	50 80 10	50 72 12		50 80 16	50 90 20	50 110 27	50 130 31	50 90 23	50 110 40	50 90 30.1	50 110 44.4	50 80 16	
11	55 90 11	55 80 13		55 90 18	55 100 21	55 120 29	55 140 33	55 100 25	55 120 43	55 100 33.3	55 120 49.2	55 90 18	
12	60 95 11	60 85 13		60 95 18	60 110 22	60 130 31	60 150 35	60 110 28	60 130 46	60 110 36.5	60 130 53.9	60 95 18	
13	65 100 11	65 90 13		65 100 18	65 120 23	65 140 33	65 160 37	65 120 31	65 140 48	65 120 38.1	65 140 58.7	65 100 18	
14	70 110 13	70 100 16		70 110 20	70 125 24	70 150 35	70 180 42	70 125 31	70 150 51	70 125 39.6	70 150 63.5	70 110 20	
15	75 115 13	75 105 16		75 115 20	75 130 25	75 160 37	75 190 45	75 130 31	75 160 55	75 130 41.2	75 160 68.2	75 115 20	
16	80 125 14	80 110 16		80 125 22	80 140 26	80 170 39	80 200 48	80 140 33	80 170 58	80 140 44.4	80 170 88.2	80 125 22	
17	85 130 14	85 120 18		85 130 22	85 150 28	85 180 41	85 210 52	85 150 36	85 180 60	85 150 49.2	85 180 73	85 130 22	
18	90 140 16	90 125 18		90 140 24	90 160 30	90 190 43	90 225 54	90 160 40	90 190 64	90 160 52.3	90 190 73	90 140 22	
19	95 145 16	95 130 18		95 145 24	95 170 32	95 200 45	95 240 55	95 170 43	95 200 67	95 170 55.5			
20	100 150 16	100 140 20		100 150 24	100 180 34	100 215 47	100 250 58	100 180 46	100 215 73	100 180 60.3			
21	105 160 18	105 145 20		105 160 26	105 190 36	105 225 49	105 260 60	105 190 50	105 225 80	105 190 65			
22	110 170 19	110 150 20		110 170 28	110 200 38	110 240 50	110 280 65	110 200 53	110 240 80	110 200 69.8			
24	120 180 19	120 165 22		120 180 28	120 215 40	120 260 55	120 310 72	120 215 58	120 260 86				
26	130 200 22	130 180 24		130 200 33	130 230 40	130 280 58	130 340 78	130 230 64	130 280 93				
28	140 210 22	140 190 24		140 210 33	140 250 42	140 300 62	140 360 82	140 250 68	140 300 102				
30	150 225 24	150 210 28		150 225 35	150 270 45	150 320 65	150 380 85	150 270 73	150 320 108				
32				160 240 38	160 290 48	160 340 68	160 400 88	160 290 80	160 340 114				
34				170 260 42	170 310 52	170 360 72	170 420 92	170 310 86	170 360 120				
36				180 280 46	180 320 52	180 380 75	180 440 95	180 320 86	180 380 126				

軸承規格表

	5100				51200 53200			51300			2900			3900			900			NN3000			29400			29300			
	d	D	H		d	D	H		d	D	H		d	D	H		d	D	H		d	D	H		d	D	H		
0	10	24	9		10	26	11			10	26	12			10	25	12												
1	12	26	9		12	28	11			12	28	12																	
2	15	28	9		15	32	12			15	31	12			15	35	14												
3	17	30	9		17	35	12			18	35	12																	
4	20	35	10		20	40	14			20	37	12			20	40	14												
5	25	42	11		25	47	15	25	52	18	25	45	14	25	52	16	25	48	15.5	25	47	16							
6	30	47	11		30	52	16	30	60	21	30	50	14	30	60	19	30	53	15.5	30	55	19							
7	35	52	12		35	62	18	35	68	24	35	55	16	35	68	22	35	62	18	35	62	20							
8	40	60	13		40	68	19	40	78	26	40	60	16	40	76	25	40	64	18	40	68	21							
9	45	65	14		45	73	20	45	85	28	45	68	16	45	85	28	45	73	22	45	75	23							
10	50	70	14		50	78	22	50	95	31	50	74	18	50	92	31	50	78	22	50	80	23							
11	55	78	16		55	90	25	55	105	35	55	78	18	55	100	33	55	88	24.5	55	90	26							
12	60	85	17		60	95	26	60	110	35	60	82	18	60	106	35	60	90	24.5	60	95	26	60	130	42				
13	65	90	18		65	100	27	65	115	36	65	90	20	65	112	36	65	100	27	65	100	26	65	140	45				
14	70	95	18		70	105	27	70	125	40	70	95	20	70	120	38	70	103	27	70	110	30	70	150	48				
15	75	100	19		75	110	27	75	135	44	75	100	20	75	128	41	75	110	27	75	115	30	75	160	51				
16	80	105	19		80	115	28	80	140	44	80	110	22	80	136	44	80	115	29	80	125	34	80	170	54				
17	85	110	19		85	125	31	85	150	49	85	115	22	85	145	47	85	125	30.5	85	130	37	85	180	58	85	150	39	
18	90	120	22		90	135	35	90	155	50	90	120	22	90	155	50	90	135	30.5	90	140	37	90	190	60	90	155	39	
19										95	130	25		95	165	54	95	140	32.5	95	145	37							
20	100	135	25		100	150	38	100	170	55	100	135	25	100	172	57	100	150	32.5	100	155	41	100	210	67	100	170	42	
21										105	140	25		105	180	60	105	155	40	105	160	45							
22	110	145	25		110	160	38	110	190	63	110	145	25	110	190	63	110	160	40	110	170	46	110	230	73	110	190	48	
24	120	155	25		120	170	39	120	210	70	120	160	27	120	210	69	120	170	43	120	180	52	120	250	78	120	210	54	
26	130	170	30		130	190	45	130	225	75										130	200	53	130	270	85	130	225	58	
28	140	180	31		140	200	46	140	240	80											140	210	56	140	280	85	140	240	60
30	150	190	31		150	215	50	150	250	80											150	225	60	150	300	90	150	250	60
32	160	200	31		160	225	51	160	270	87											160	240	67	160	320	95	160	270	67
34	170	215	34		170	240	55	170	280	87											170	260	74	170	340	103	170	280	67
36	180	225	34		180	250	56	180	300	95											180	280	75	180	360	109	180	300	73
38																					190			190	380	115	190	320	78
40																					200			200	400	122	200	340	85
44																					220			220	420	122	220	360	85
48																					240			240	440	122	240	380	85
52																					260			260	480	132	260	420	95
56																					280			280	520	145	280	440	95
60																					300			300	540	145	300	480	109
64																					320			320	580	155	320	500	109

A系列單、雙排KMC鏈條


單排滾子鏈含套筒

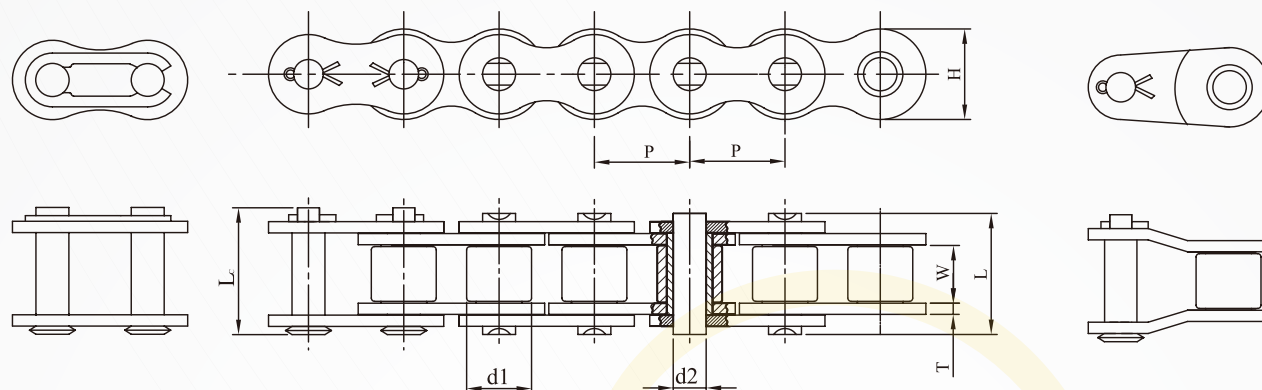

ISO 鏈號	ANSI 鏈號	KMC 鏈號	節距	內節 寬度	滾子 外徑	銷軸 外徑	銷軸 長度		鏈片 高度	鏈片 厚度	最小抗 拉強度	平均抗 拉強度	工作 載荷
			P	W min	d1 max	d2 max	L max	Lc max	H max	T	min		max
			mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf	kgf
04C	25	25	6.35	3.10	3.30	2.31	8.0	8.80	6.02	0.75	360	400	65
06C	35	35	9.525	4.68	5.08	3.60	12.15	13.40	9.05	1.15	810	1100	220
083		415E	12.70	4.88	7.77	3.97	12.90	13.45	10.30	1.1/1.4	1185	1390	380
084		415H	12.70	4.68	7.77	3.97	13.30	15.00	12.00	1.50	1810	1900	380
085	41	41	12.70	6.25	7.77	3.60	14.0	16.0	9.91	1.20	680	1250	230
08A	40	40	12.70	7.85	7.92	3.98	17.80	21.0	12.07	1.50	1420	1950	370
10A	50	50	15.875	9.40	10.16	5.09	21.80	25.0	15.09	2.0	2230	3000	650
12A	60	60	19.05	12.57	11.91	5.96	26.90	31.0	18.0	2.35	4000	4100	920
16A	80	80	25.40	15.75	15.88	7.94	33.50	38.0	24.13	3.20	5680	7500	1500
20A	100	100	31.75	18.90	19.05	9.54	41.10	47.0	30.17	4.0	8880	12100	2300
24A	120	120	38.10	25.22	22.23	11.11	50.80	57.0	36.20	4.70	12770	16000	3100
28A	140	140	44.45	25.22	25.40	12.71	54.90	62.0	42.23	5.50	17380	21000	4100
32A	160	160	50.80	31.55	28.58	14.29	65.50	73.0	48.26	6.40	22800	30000	5400
40A	200	200	63.50	37.85	39.68	19.85	80.40	90.0	60.33	8.0	35460	46000	7300
48A	240	240	76.20	47.35	47.63	23.81	95.50	106.0	72.39	9.50	53110	67500	10100

A系列單、雙排KMC鏈條


雙排滾子鏈含套筒

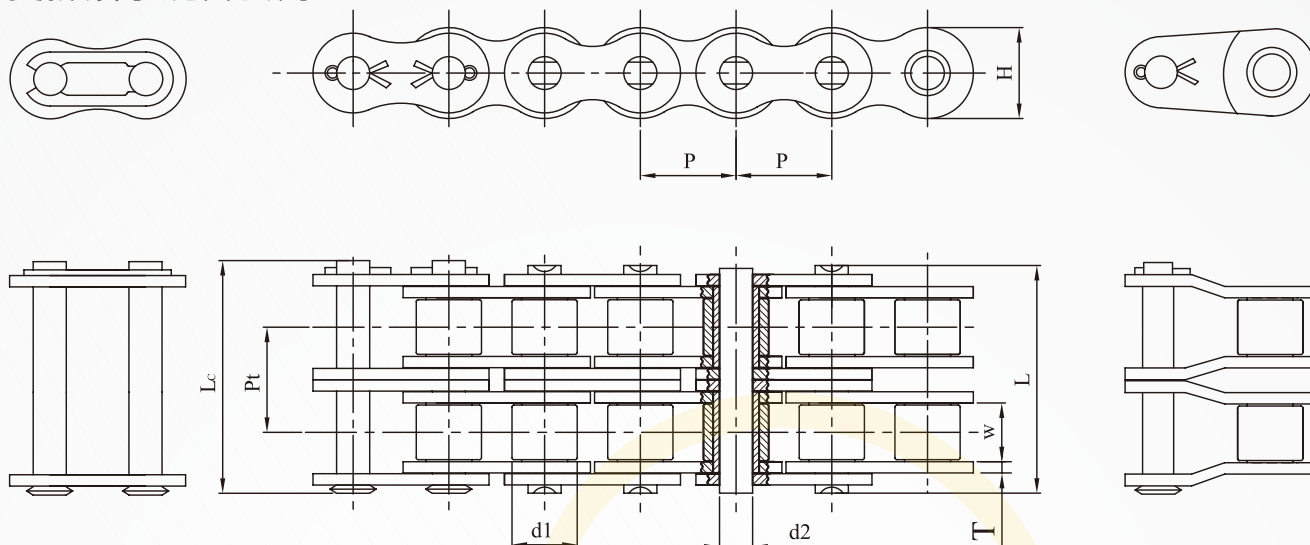

ISO 鏈號	ANSI 鏈號	KMC 鏈號	節距	內節 寬度	滾子 外徑	銷軸 外徑	銷軸 長度		鏈片 高度	鏈片 厚度	最小抗 拉強度	平均抗 拉強度	工作 載荷	排距
			P	W min	d1 max	d2 max	L max	Lc max	H max	T	min		max	Pt
			mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf	kgf	mm
04C-2	25-2	25-2	6.35	3.10	3.30	2.31	14.50	15.20	6.02	0.75	720	860	110	6.40
06C-2	35-2	35-2	9.525	4.68	5.08	3.60	22.80	23.70	9.05	1.15	1620	2200	370	10.13
08A-2	40-2	40-2	12.70	7.85	7.92	3.98	32.30	36.20	12.07	1.50	2840	3900	630	14.38
10A-2	50-2	50-2	15.875	9.40	10.16	5.09	39.90	44.0	15.09	2.0	4450	6200	1100	18.11
12A-2	60-2	60-2	19.05	12.57	11.91	5.96	49.80	54.40	18.10	2.35	6400	8400	1530	22.78
16A-2	80-2	80-2	25.40	15.75	15.88	7.94	62.70	68.10	24.13	3.20	11360	15000	2550	29.29
20A-2	100-2	100-2	31.75	18.90	19.05	9.54	77.0	83.10	30.17	4.0	17760	24200	3900	35.76
24A-2	120-2	120-2	38.10	25.22	22.23	11.11	96.30	102.9	36.20	4.70	25540	32000	5250	45.44
28A-2	140-2	140-2	44.45	25.22	25.40	12.71	103.60	111.0	42.23	5.50	34760	42000	6970	48.87
32A-2	160-2	160-2	50.80	31.55	28.58	14.29	124.20	132.10	48.26	6.40	45600	60000	9150	58.55
40A-2	200-2	200-2	63.50	37.85	39.68	19.85	151.90	162.10	60.33	8.0	70920	92000	12400	71.55
48A-2	240-2	240-2	76.20	47.35	47.63	23.81	183.40	193.90	72.39	9.50	106220	135000	17150	87.83

B系列單、雙排KMC/TEC鏈條


單排滾子鏈

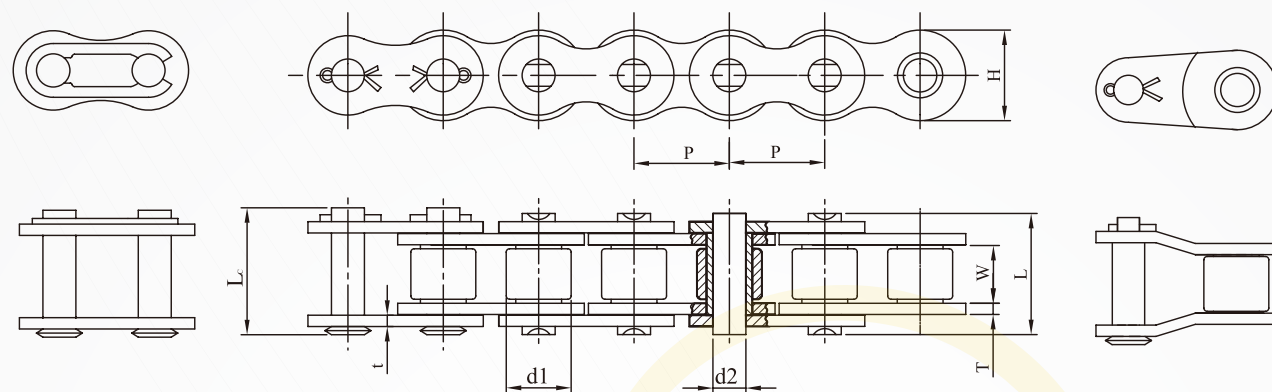

ISO 鏈號	KMC 鏈號	節距	內節 寬度	滾子 外徑	銷軸 外徑	銷軸 長度		鏈片 高度	鏈片 厚度	最小抗 拉強度	平均抗 拉強度
		P	W min	d1 max	d2 max	L max	Lc max	H max	T/t	min	
		mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf
04B	04B	6.0	2.80	4.10	1.85	7.40	10.30	5.0	0.60	306	320
05B	05B	8.0	3.0	5.0	2.31	8.60	11.70	7.11	0.75	500	600
06B	06B	9.525	5.72	6.35	3.28	13.50	16.80	8.26	1.40/1.10	910	1100
08B	08B	12.70	7.75	8.51	4.45	17.0	20.70	11.81	1.50	1820	1950
10B	10B	15.875	9.65	10.16	5.08	19.60	23.70	14.73	1.70	2270	2800
12B	12B	19.05	11.68	12.07	5.72	22.70	27.30	16.10	1.80	2950	3350
16B	16B	25.40	17.02	15.88	8.28	36.10	41.50	21.0	4.0/3.0	6130	7500
20B	20B	31.75	19.56	19.05	10.19	43.20	49.30	26.42	4.50/3.50	9700	10850
24B	24B	38.10	25.40	25.40	14.63	53.40	60.0	33.40	6.0/5.0	16330	18200
28B	28B	44.45	30.99	27.94	15.90	65.10	72.50	37.08	7.40/6.40	20410	23000
32B	32B	50.80	30.99	29.21	17.81	67.40	75.30	42.29	7.0/6.0	25520	28500
40B	40B	63.50	38.10	39.37	22.89	82.60	92.60	52.96	8.50/8.0	36230	40500
48B	48B	76.20	45.72	48.26	29.24	99.10	109.10	63.88	12.0/9.50	57150	63500


B系列單、雙排KMC/TEC鏈條

雙排滾子鏈

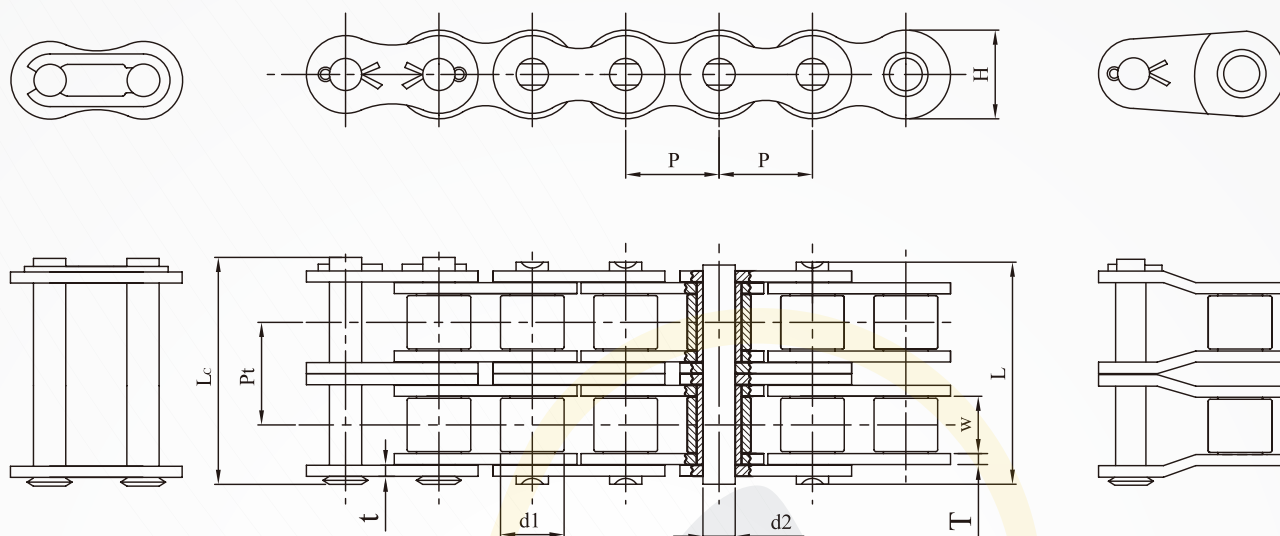

ISO 鏈號	KMC 鏈號	節距	內節 寬度	滾子 外徑	銷軸 外徑	銷軸 長度		鏈片 高度	鏈片 厚度	最小抗 拉強度	平均抗 拉強度	排距
		P	W min	d1 max	d2 max	L max	Lc max	H max	T/t	min		Pt
		mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf	mm
05B-2	05B-2	8.0	3.0	5.0	2.31	14.30	17.40	7.11	0.75	800	1050	5.65
06B-2	06B-2	9.525	5.72	6.35	3.28	23.80	27.10	8.26	1.4/1.1/1.6	1730	1900	10.24
08B-2	08B-2	12.70	7.75	8.51	4.45	31.0	34.90	11.81	1.50	3180	3850	13.92
10B-2	10B-2	15.875	9.65	10.16	5.08	36.20	40.30	14.73	1.70	4550	5600	16.59
12B-2	12B-2	19.05	11.68	12.07	5.72	42.20	46.80	16.13	1.80	5900	6500	19.46
16B-2	16B-2	25.40	17.02	15.88	8.28	68.0	73.40	21.08	4.0/3.0	10820	15000	31.88
20B-2	20B-2	31.75	19.56	19.05	10.19	79.0	85.10	26.42	4.50/3.50	17350	21700	36.45
24B-2	24B-2	38.10	25.40	25.40	14.63	101.0	107.6	33.40	6.0/5.0	28580	36400	48.36
28B-2	28B-2	44.45	30.99	27.94	15.90	124.0	131.40	37.08	7.40/6.40	36740	46000	59.56
32B-2	32B-2	50.80	30.99	29.21	17.81	126.0	133.90	42.29	7.0/6.0	45920	57000	58.55
40B-2	40B-2	63.50	38.10	39.37	22.89	154.0	164.0	52.90	8.50/8.0	64290	81000	72.29
48B-2	48B-2	76.20	45.72	48.26	29.24	190.0	200.0	63.88	12.0/9.50	102050	127000	91.21


A、C系列雙節距KMC/TEC鏈條

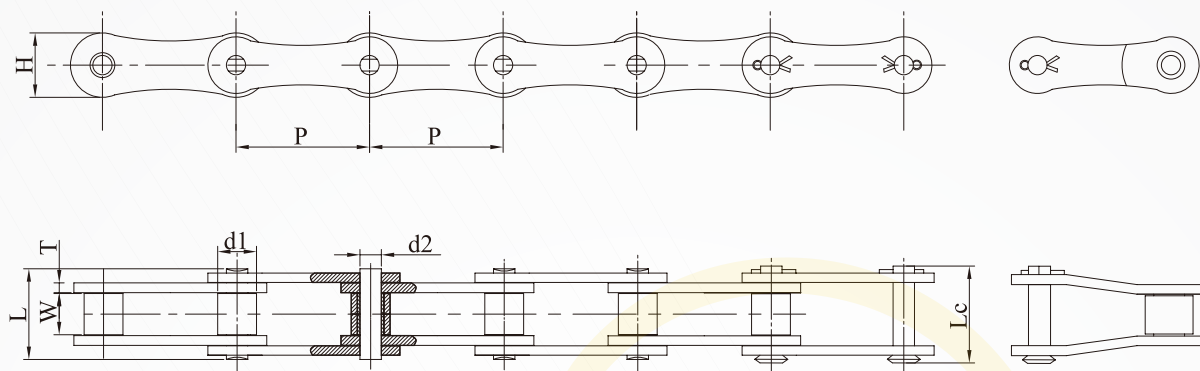


ISO 鏈號	ANSI 鏈號	KMC 鏈號	節距	內節 寬度	滾子 外徑	銷軸 外徑	銷軸 長度		鏈片 高度	鏈片 厚度	最小抗 拉強度	平均抗 拉強度	工作 載荷
			P	W min	d1 max	d2 max	L max	Lc max	H max	T	min		max
			mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf	kgf
208A	2040	A2040	25.40	7.85	7.92	3.98	17.80	21.0	12.0	1.50	1420	1950	280
210A	2050	A2050	31.75	9.40	10.16	5.09	21.80	25.0	15.0	2.0	2220	3100	450
212A	2060	A2060	38.10	12.57	11.91	5.96	26.90	31.0	18.0	2.35	3190	4200	640

A、C系列雙節距KMC/TEC鏈條

大滾子型

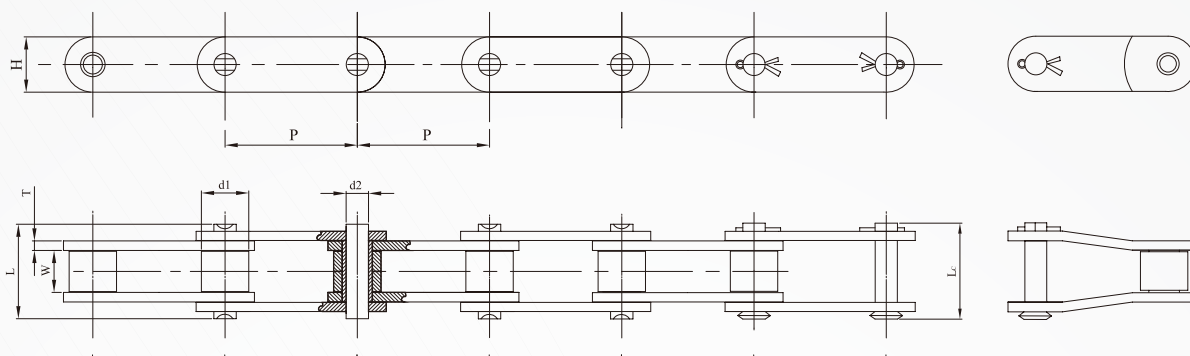


小滾子型

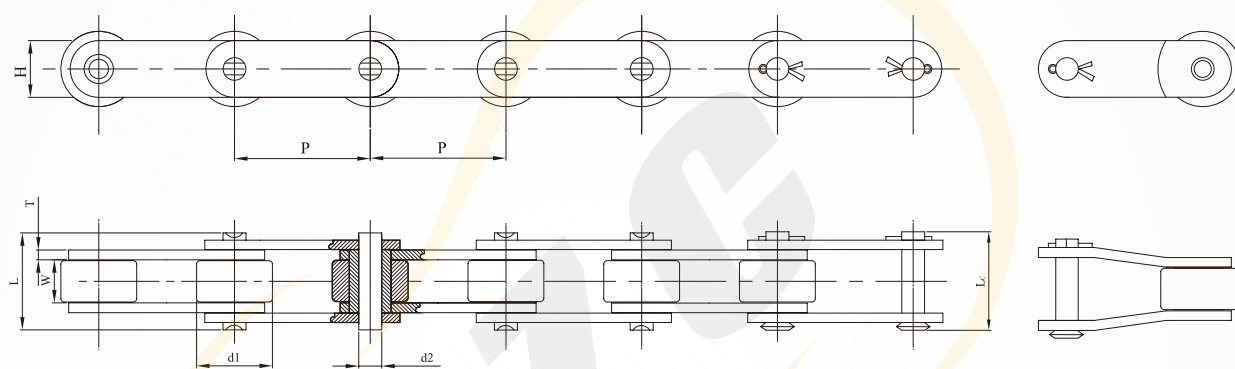

ISO 鏈號	ANSI 鏈號	KMC 鏈號	節距	內節 寬度	滾子 外徑	銷軸 外徑	銷軸 長度		鏈片 高度	鏈片 厚度	最小抗 拉強度	平衡抗 拉強度	工作 載荷
			P	W min	d1 max	d2 max	L max	Lc max	H max	T	min		max
			mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf	kgf
C208A	C2040	C2040	25.40	7.85	7.92	3.98	17.80	21.0	12.0	1.50	1420	1950	280
C208AL	C2042	C2042	25.40	7.85	15.88	3.98	17.80	21.0	12.0	1.50	1420	1950	280
C210A	C2050	C2050	31.75	9.40	10.16	5.09	21.80	25.0	15.0	2.0	2220	3100	450
C210AL	C2052	C2052	31.75	9.40	19.05	5.09	21.80	25.0	15.0	2.0	2220	3100	450


A系列加重型鏈條 單節距

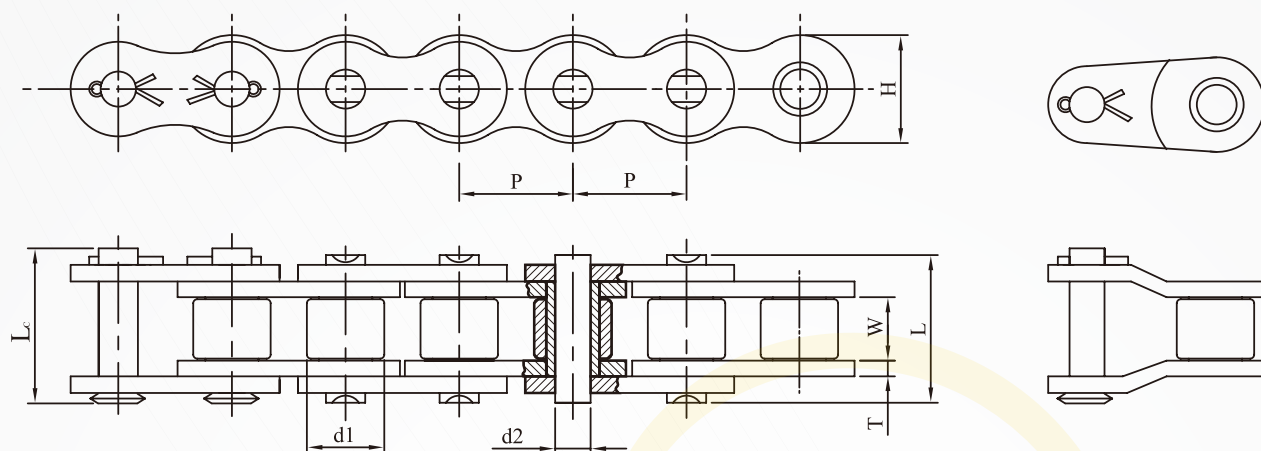


ISO 鏈號	ANSI 鏈號	KMC 鏈號	節距	內節 寬度	滾子 外徑	銷軸 外徑	銷軸 長度		鏈片 高度	鏈片 厚度	最小抗 拉強度	平均抗 拉強度	工作 載荷	排距
			P	W min	d1 max	d2 max	L max	Lc max	H max	T	min		max	Pt
			mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf	kgf	mm
	25H	25H	6.35	3.10	3.30	2.31	9.00	10	5.90	1.0	550	650	100	/
	35HH	35HH	9.525	4.68	5.08	3.60	14.38	15.33	9.05	1.80	1300	1420	260	/
08AH	40H	40H	12.70	7.85	7.92	3.98	19.0	20.10	12.0	2.0	1700	2100	400	/
10AH	50H	50H	15.875	9.40	10.16	5.09	21.80	23.70	15.0	2.35	2670	3300	670	/
12AH	60H	60H	19.05	12.57	11.91	5.96	30.20	34.80	18.0	3.20	3830	4650	980	/
16AH	80H	80H	25.40	15.75	15.88	7.94	37.40	42.80	24.10	4.0	8000	9400	1700	/
20AH	100H	100H	31.75	18.90	19.05	9.54	44.50	50.60	30.10	4.70	10650	13700	2500	/
24AH	120H	120H	38.10	25.22	22.23	11.11	55.0	61.60	36.20	5.50	15320	19000	3350	/
28AH	140H	140H	44.45	25.22	25.40	12.71	59.0	66.40	42.20	6.40	20850	23000	4400	/
32AH	160H	160H	50.80	31.55	28.58	14.29	69.40	77.30	48.20	7.00	27240	31000	5750	/
12AH-2	60H-2	60H-2	19.05	12.57	11.91	5.96	56.30	60.90	18.0	3.20	7660	9300	1650	26.11
16AH-2	80H-2	80H-2	25.40	15.75	15.88	7.94	70.0	75.40	24.10	4.0	16000	18800	2800	32.59

A系列加重型鏈條 雙節距

小滾子型

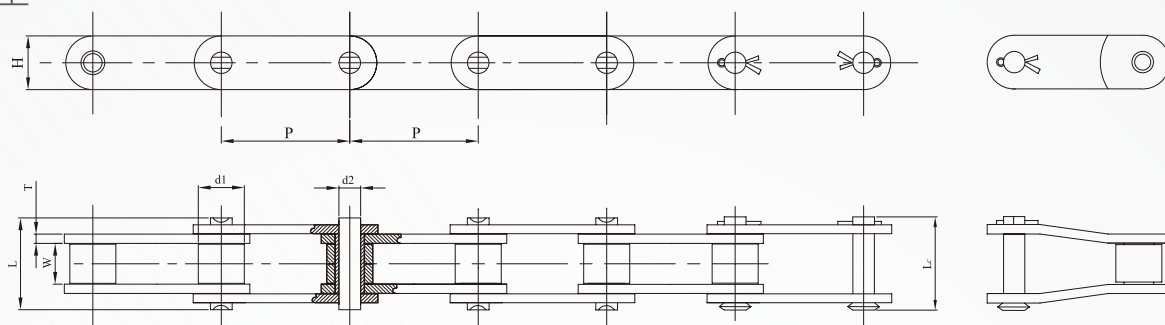


大滾子型

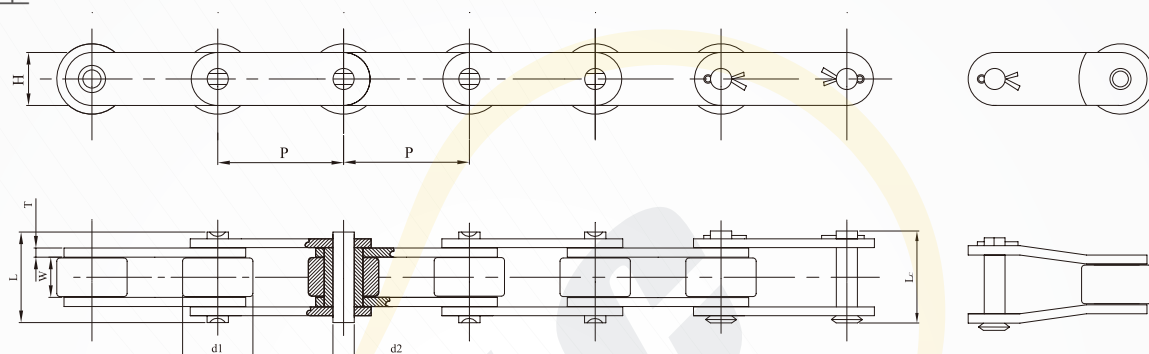

ISO 鏈號	ANSI 鏈號	KMC 鏈號	節距	內節 寬度	滾子 外徑	銷軸 外徑	銷軸 長度		鏈片 高度	鏈片 厚度	最小抗 拉強度	平均抗 拉強度	工作 載荷
			P	W min	d1 max	d2 max	L max	Lc max	H max	T	min		max
			mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf	kgf
C212AH	C2060H	C2060H	38.10	12.57	11.91	5.96	30.20	34.80	18.0	3.20	3830	4400	640
C212AHL	C2062H	C2062H	38.10	12.57	22.23	5.96	30.20	34.80	18.0	3.20	3830	4400	640
C216AH	C2080H	C2080H	50.80	15.75	15.88	7.94	37.40	42.80	24.10	4.0	6820	8000	1100
C216AHL	C2082H	C2082H	50.80	15.75	28.58	7.94	37.40	42.80	24.10	4.0	6820	8000	1100
C220AH	C2100H	C2100H	63.50	18.90	19.05	9.54	44.50	50.60	30.10	4.7	10650	12500	1900
C220AHL	C2102H	C2102H	63.50	18.90	39.67	9.54	44.50	50.60	30.10	4.7	10650	12500	1900
C224AH	C2120H	C2120H	76.20	25.22	22.23	11.11	55.0	61.60	36.20	5.5	15320	17500	2550
C224AHL	C2122H	C2122H	76.20	25.22	44.45	11.11	55.0	61.60	36.20	5.5	15320	17500	2550
C232AH	C2160H	C2160H	101.60	31.55	28.58	14.29	69.40	77.30	48.20	7.0	27240	29500	4300
C232AHL	C2162H	C2162H	101.60	31.55	57.15	14.29	69.40	77.30	48.20	7.0	27240	29500	4300

單節距不鏽鋼鏈條

具有相同的尺寸，短節距精密滾子鏈，這種鏈是由優異的不鏽鋼SUS300列製造而成，它具有優良的耐腐蝕性，低磁性和抗高溫。廣泛應用於食品加工，藥品製造管理部門和其他領域。根據您的具體要求，鏈條也可以搭配附件使用。

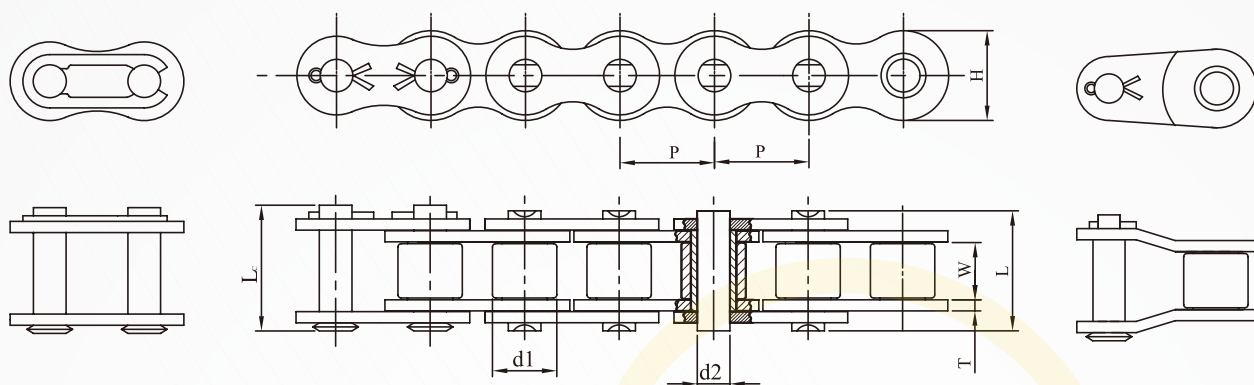


KMC 鏈號	節距	內節寬度	滾子外徑	銷軸外徑	銷軸長度		鏈片高度	鏈片厚度	最小抗拉強度	平均抗拉強度
	P	W min	d1 max	d2 max	L max	Lc max	H max	T/t	min	
	mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf
25SS	6.35	3.10	3.30	2.31	8.0	8.80	6.02	0.75	200	250
35SS	9.525	4.68	5.08	3.60	12.15	13.40	8.80	1.20	570	700
40SS	12.70	7.85	7.92	3.98	17.80	21.0	12.0	1.50	1000	1250
50SS	15.875	9.40	10.16	5.09	21.80	25.0	15.0	2.0	1600	1900
60SS	19.05	12.57	11.91	5.96	26.90	31.0	18.0	2.35	2300	2700
80SS	25.40	15.75	15.88	7.94	33.50	38.0	24.10	3.20	4100	5000

KMC 鏈號	節距	內節寬度	滾子外徑	銷軸外徑	銷軸長度		鏈片高度	鏈片厚度	最小抗拉強度	平均抗拉強度
	P	W min	d1 max	d2 max	L max	Lc max	H max	T/t	min	
	mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf
06BSS	9.525	5.72	6.35	3.28	13.50	16.80	8.20	1.40/1.10	640	760
08BSS	12.70	7.75	8.51	4.45	17.0	20.70	11.80	1.50	1250	1500
10BSS	15.875	9.65	10.16	5.08	19.60	23.70	14.70	1.70	1650	2000
12BSS	19.05	11.68	12.07	5.72	22.70	27.30	16.10	1.80	2100	2500
16BSS	25.40	17.02	15.88	8.28	36.10	41.50	21.0	4.0/3.0	4300	5400

單節距不鏽鋼鏈條


雙排滾子鏈

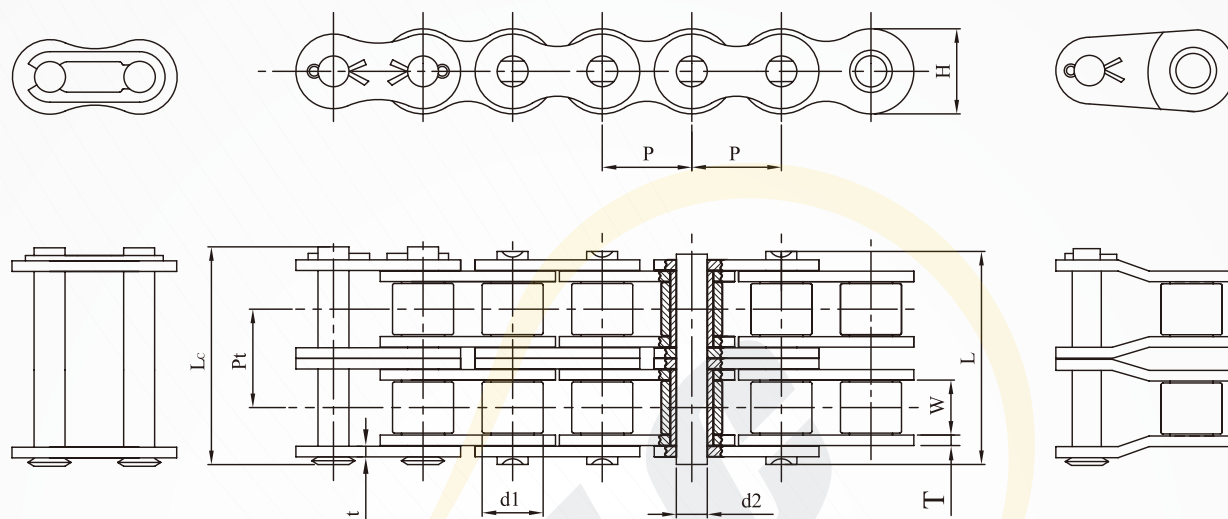

KMC 鏈號	節距	內節 寬度	滾子 外徑	銷軸 外徑	銷軸 長度		鏈片 高度	鏈片 厚度	最小抗 拉強度	平均抗 拉強度	排距
	P	W min	d1 max	d2 max	L max	Lc max	H max	T	min		Pt
	mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf	mm
40SS-2	12.70	7.85	7.92	3.98	32.30	36.20	12.0	1.50	2000	2500	14.38
50SS-2	15.875	9.40	10.16	5.09	39.90	44.0	15.0	2.0	3600	3800	18.11
60SS-2	19.05	12.58	11.91	5.96	49.80	54.40	18.0	2.35	4800	5300	22.78
80SS-2	25.40	15.75	15.88	7.94	62.70	68.10	24.10	3.20	9000	9160	29.29

單節距不鏽鋼鏈條


雙排滾子鏈

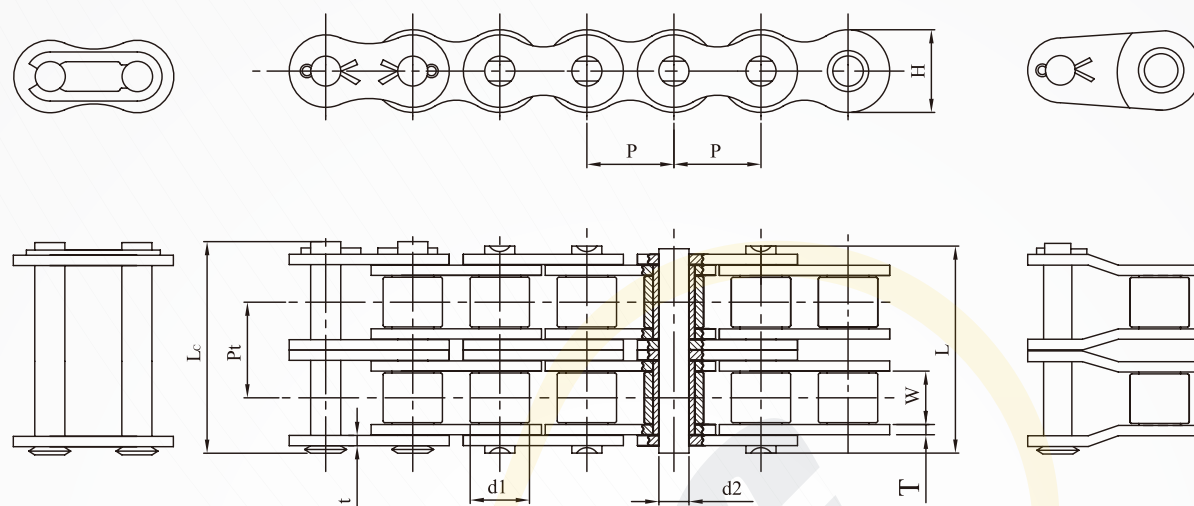


KMC 鏈號	節距	內節 寬度	滾子 外徑	銷軸 外徑	銷軸 長度		鏈片 高度	鏈片 厚度	最小抗 拉強度	平均抗 拉強度	排距
	P	W min	d1 max	d2 max	L max	Lc max	H max	T	min		Pt
	mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf	mm
06BSS-2	9.525	5.72	6.35	3.28	23.80	27.10	8.20	1.40/1.10	1100	1225	10.24
08BSS-2	12.70	7.75	8.51	4.45	31.0	34.90	11.80	1.50	2200	2580	13.92
10BSS-2	15.875	9.65	10.16	5.08	36.20	40.30	14.70	1.70	3000	3620	16.59
12BSS-2	19.05	11.68	12.07	5.72	42.20	46.80	16.10	1.80	3600	4200	19.46
16BSS-2	25.40	17.02	15.88	8.28	68.0	73.40	21.08	4.0/3.0	8800	9600	31.88

雙節距不鏽鋼鏈條

小滾子型

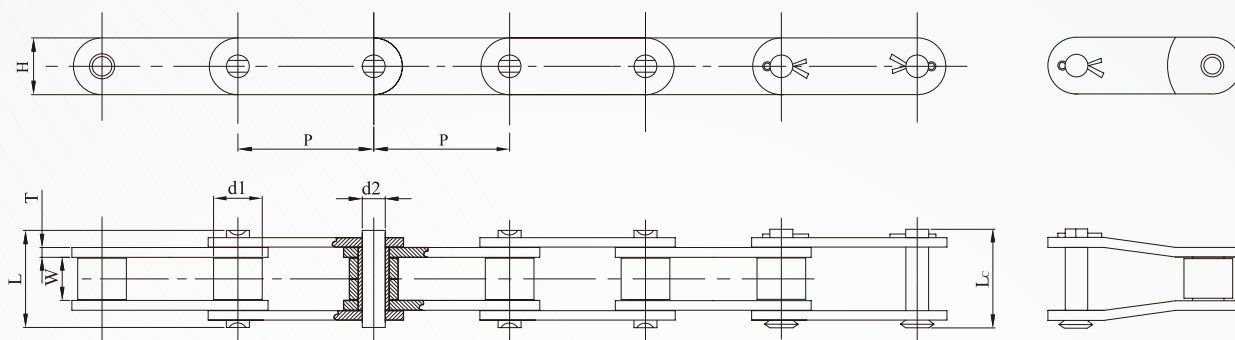


大滾子型

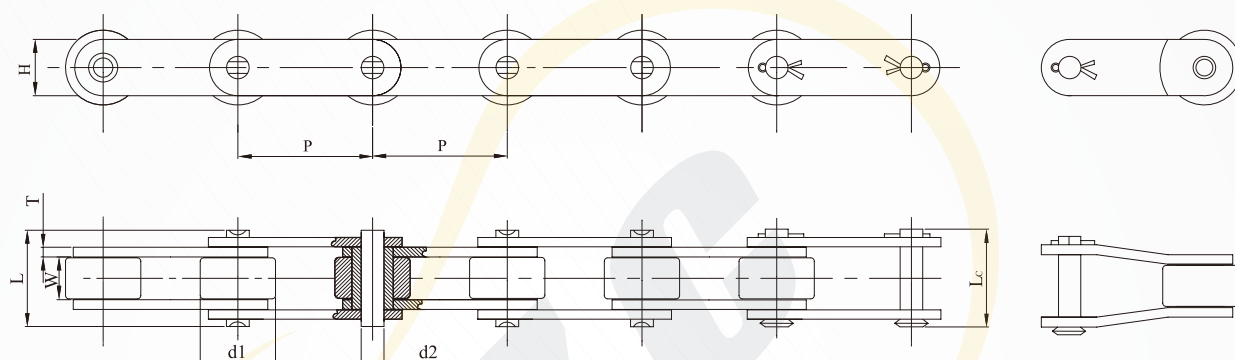

KMC 鏈號	節距	內節 寬度	滾子 外徑	銷軸 外徑	銷軸 長度		鏈片 高度	鏈片 厚度	最小抗 拉強度	平均抗 拉強度
	P	W min	d1 max	d2 max	L max	Lc max	H max	T	min	
	mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf
C2040SS	25.40	7.85	7.92	3.98	17.80	21.0	12.0	1.50	1000	1250
C2042SS	25.40	7.85	15.88	3.98	17.80	21.0	12.0	1.50	1000	1250
C2050SS	31.75	9.40	10.16	5.09	21.80	25.0	15.0	2.0	1600	1900
C2052SS	31.75	9.40	19.05	5.09	21.80	25.0	15.0	2.0	1600	1900
C2060HSS	38.10	12.57	11.91	5.96	26.90	31.0	18.0	3.20	2600	3100
C2062HSS	38.10	12.57	22.23	5.96	26.90	31.0	18.0	3.20	2600	3100
C2080HSS	50.80	15.75	15.88	7.94	33.50	38.0	24.10	4.0	4700	5400
C2082HSS	50.80	15.75	28.58	7.94	33.50	38.0	24.10	4.0	4700	5400


標準配件鏈條

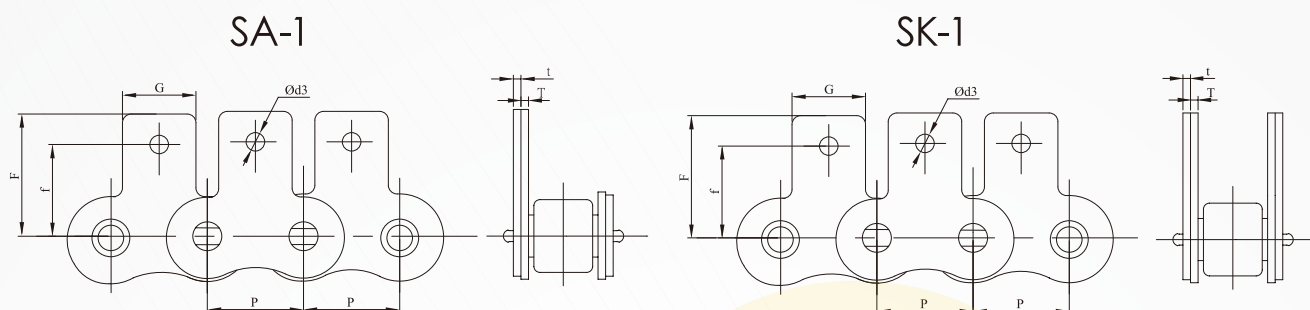


ISO 鏈號	ANSI 鏈號	KMC 鏈號	節距	配件 厚度	配件尺寸			
			P	T/t	G	F	f	d3
			mm	mm	mm	mm	mm	mm
08A	40	40	12.70	1.50	9.50	17.05	12.70	3.60
10A	50	50	15.875	2.00	12.70	22.60	15.88	5.20
12A	60	60	19.05	2.35	15.90	26.20	18.26	5.20
16A	80	80	25.40	3.20	19.05	34.00	24.60	6.80
20A	100	100	31.75	4.00	25.40	44.00	31.80	8.70
24A	120	120	38.10	4.70	28.60	51.60	36.50	9.80
28A	140	140	44.45	5.50	34.90	62.00	44.40	11.40
32A	160	160	50.80	6.40	38.10	69.85	50.80	13.10
40A	200	200	63.50	8.00	42.00	76.00	63.50	16.30
06B		06B	9.525	1.4/1.1	8.00	13.50	9.52	3.50
08B		08B	12.70	1.50	9.50	18.90	13.00	4.50
10B		10B	15.875	1.70	14.30	22.95	16.50	5.30
12B		12B	19.05	1.80	16.00	28.60	21.00	6.40
16B		16B	25.40	4.0/3.0	19.10	34.00	23.00	6.40

標準配件鏈條

A-1

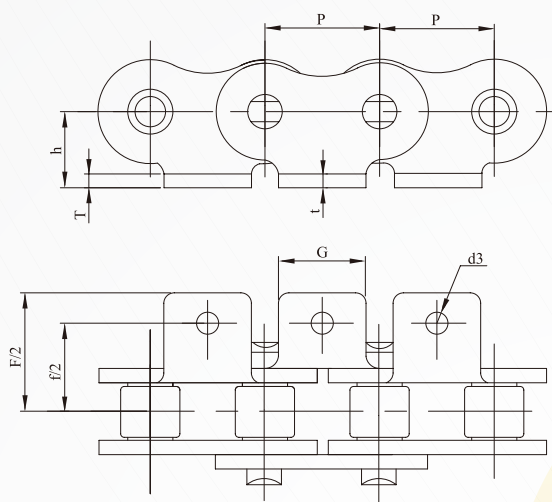


K-1

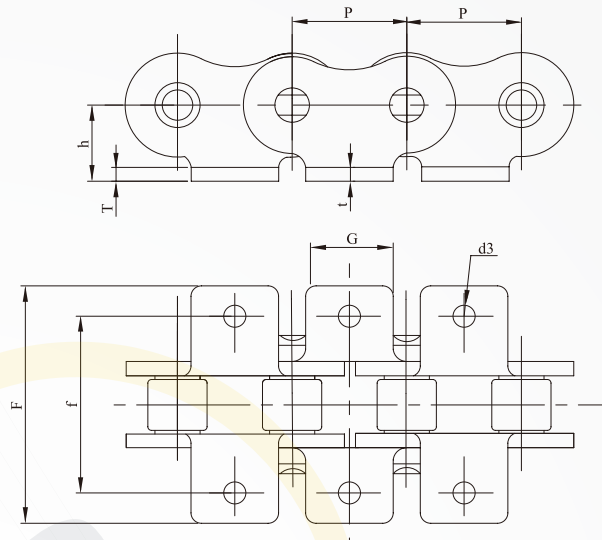


ISO 鏈號	ANSI 鏈號	KMC 鏈號	節距	鏈片 厚度	配件尺寸				
			P	T/t	G	F	f	d3	h
			mm	mm	mm	mm	mm	mm	mm
08A	40	40	12.70	1.50	9.50	35.00	25.40	3.60	7.92
10A	50	50	15.875	2.00	12.70	45.20	31.75	5.20	10.30
12A	60	60	19.05	2.35	15.90	54.00	38.10	5.20	11.90
16A	80	80	25.40	3.20	19.05	69.60	50.80	6.80	15.90
20A	100	100	31.75	4.00	25.40	90.76	63.50	8.70	19.80
24A	120	120	38.10	4.70	28.60	108.50	76.20	9.80	23.00
28A	140	140	44.45	5.50	34.90	123.00	88.90	11.40	28.60
32A	160	160	50.80	6.40	38.10	142.80	101.60	13.10	31.80
40A	200	200	63.50	8.00	42.00	152.00	127.00	16.30	42.90
06B		06B	9.525	1.4/1.1	8.00	27.00	19.04	3.50	6.50
08B		08B	12.70	1.50	9.50	36.40	25.40	4.30	8.90
10B		10B	15.875	1.70	14.30	44.60	31.80	5.30	10.30
12B		12B	19.05	1.80	16.00	52.20	38.10	6.40	13.50
16B		16B	25.40	4.0/3.0	19.10	72.60	50.80	6.40	15.90

標準配件鏈條

WSA-1 WSA-2

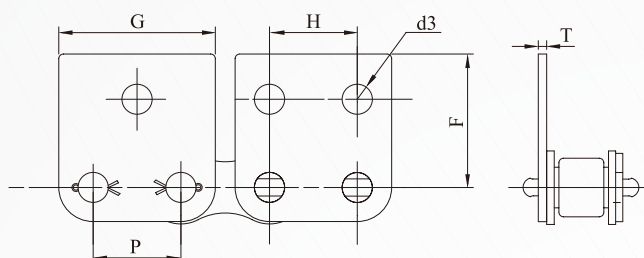


WSK-1 WSK-2

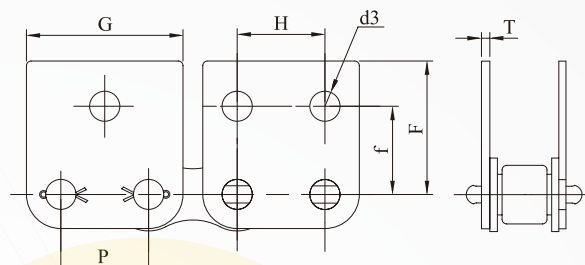


ISO 鏈號	ANSI 鏈號	KMC 鏈號	節距	鏈片 厚度	配件尺寸				
			P	T	G	H	f	F	d3
			mm	mm	mm	mm	mm	mm	mm
06C	35	35	9.525	1.15	17.32	9.52	9.52	14.55	2.80
08A	40	40	12.70	1.50	22.90	12.70	12.70	17.40	3.40
10A	50	50	15.875	2.00	28.85	15.88	15.90	23.05	5.50
12A	60	60	19.05	2.35	34.20	19.05	18.30	28.20	6.60
16A	80	80	25.40	3.20	46.00	25.40	24.60	34.25	6.80
20A	100	100	31.75	4.00	61.80	31.75	31.80	47.00	8.50
24A	120	120	38.10	4.70	69.30	38.10	36.50	51.60	9.80
28A	140	140	44.45	5.50	80.45	44.45	44.40	62.00	11.40
32A	160	160	50.80	6.40	92.00	50.80	50.80	69.85	13.10
08B		08B	12.70	1.50	23.30	12.70	13.00	18.90	4.30
10B		10B	15.875	1.70	29.58	15.88	16.50	22.95	5.30
12B		12B	19.05	1.80	36.07	19.05	18.18	26.34	6.50
16B		16B	25.40	3.00	46.40	25.40	23.00	34.00	6.40
20B		20B	31.75	3.50	58.10	31.75	30.50	45.70	8.40

標準配件鏈條

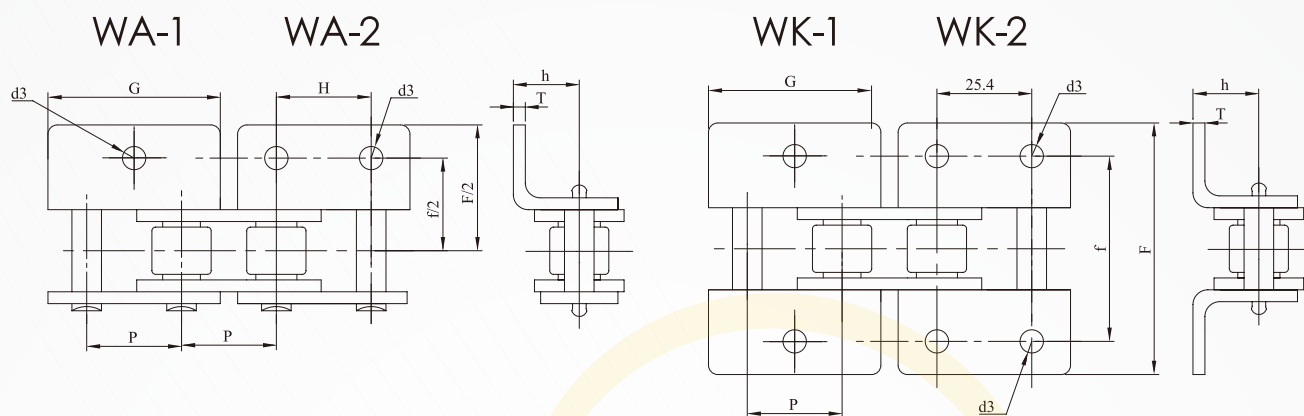


ISO 鏈號	ANSI 鏈號	KMC 鏈號	節距	鏈片 厚度	配件尺寸					
			P	T	G	H	f	F	d3	h
			mm	mm	mm	mm	mm	mm	mm	mm
06C	35	35	9.525	1.15	17.32	9.52	19.04	28.60	2.80	6.40
08A	40	40	12.70	1.50	22.90	12.70	25.40	35.60	3.40	7.9
10A	50	50	15.875	2.0	28.85	15.88	31.80	46.80	5.50	10.3
12A	60	60	19.05	2.35	36.00	19.05	38.10	56.40	6.60	11.9
16A	80	80	25.40	3.2	46.00	25.40	50.80	69.30	6.80	15.88
20A	100	100	31.75	4.00	57.65	31.75	63.50	89.80	8.70	19.8
24A	120	120	38.10	4.7	69.30	38.10	76.20	108.80	9.80	23
28A	140	140	44.45	5.60	80.45	44.45	88.90	123.00	11.40	28.6
32A	160	160	50.80	6.40	92.00	50.80	101.60	142.80	13.10	31.8
08B		08B	12.70	1.50	24.30	12.70	28.00	36.40	4.30	8.9
10B		10B	15.875	1.70	29.58	15.88	31.76	44.60	5.30	10.30
12B		12B	19.05	1.80	34.05	19.05	38.10	52.40	6.40	13.50
16B		16B	25.40	3.00	46.40	25.40	50.80	72.60	6.40	15.90
20B		20B	31.75	3.50	58.10	31.75	63.00	100.50	9.00	19.8

雙節距配件鏈條

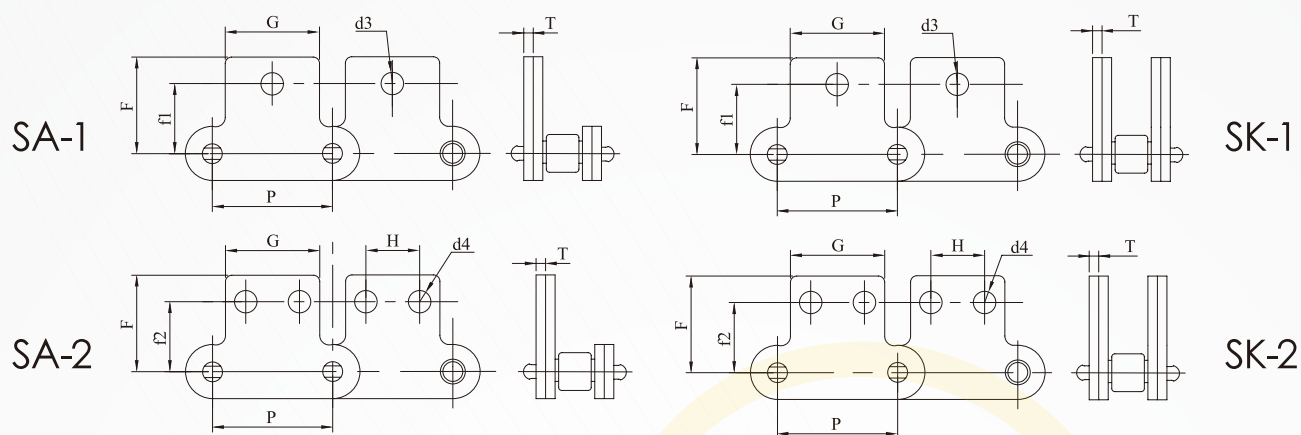

ISO 鏈號	ANSI 鏈號	KMC 鏈號	節距	鏈片 厚度	配件尺寸						
			P	T	G	H	f1	f2	F	d4	d3
			mm	mm	mm	mm	mm	mm	mm	mm	mm
C208A	C2040	C2040	25.40	1.50	19.10	9.52	11.10	13.50	19.80	3.60	5.20
C208AL	C2042	C2042									
C210A	C2050	C2050	31.75	2.00	23.80	11.91	14.25	15.88	24.60	5.20	6.80
C210AL	C2052	C2052									
C212AH	C2060H	C2060H	38.10	3.20	28.70	14.27	17.50	19.05	30.60	5.20	8.70
C212AHL	C2062H	C2062H									
C216AH	C2080H	C2080H	50.80	4.00	38.10	19.10	22.20	25.40	41.40	6.60	11.00
C216AHL	C2082H	C2082H									
C220AH	C2100H	C2100H	63.50	4.70	47.60	23.80	28.60	31.80	50.40	8.70	13.00
C220AHL	C2102H	C2102H									
C224AH	C2120H	C2120H	76.20	5.50	57.20	28.60	33.30	37.30	60.10	10.30	14.80
C224AHL	C2122H	C2122H									


雙節距配件鏈條

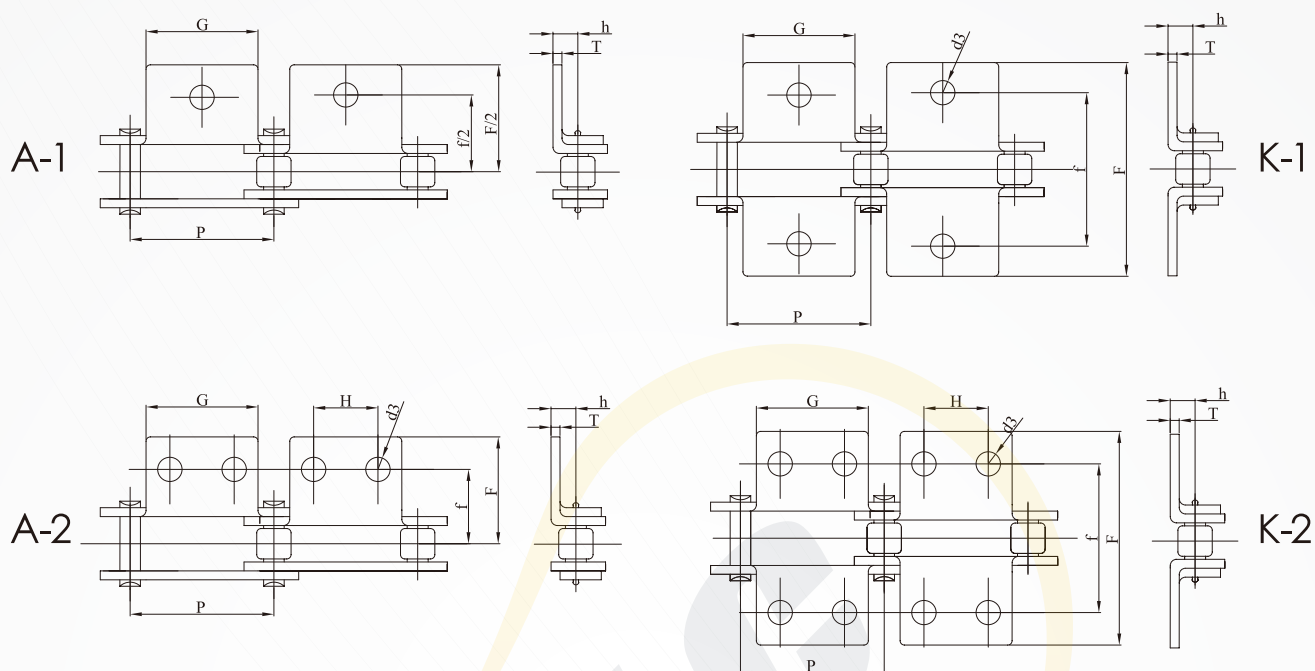


ISO 鏈號	ANSI 鏈號	KMC 鏈號	節距	鏈片 厚度	配件尺寸					
			P	T	G	H	f	F	h	d3
			mm	mm	mm	mm	mm	mm	mm	mm
C208A	C2040	C2040	25.40	1.50	19.10	9.52	25.40	38.40	9.20	3.60
C208AL	C2042	C2042								5.20
C210A	C2050	C2050	31.75	2.00	23.80	11.91	31.76	47.60	11.10	5.20
C210AL	C2052	C2052								6.80
C212AH	C2060H	C2060H	38.10	3.20	28.7	14.25	42.90	62.48	14.30	5.20
C212AHL	C2062H	C2062H								8.70
C216AH	C2080H	C2080H	50.80	4.00	38.1	19.05	55.60	82.80	19.05	6.80
C216AHL	C2082H	C2082H								
C224AH	C2120H	C2120H	76.2	5.50	57.2	28.6	79.30	121.4	27.80	10.3
C224AHL	C2122H	C2122H								

雙節距不鏽鋼配件鏈條

A-1

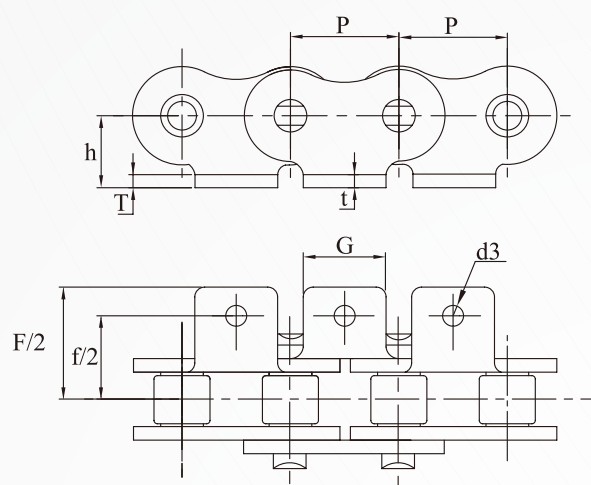


K-1

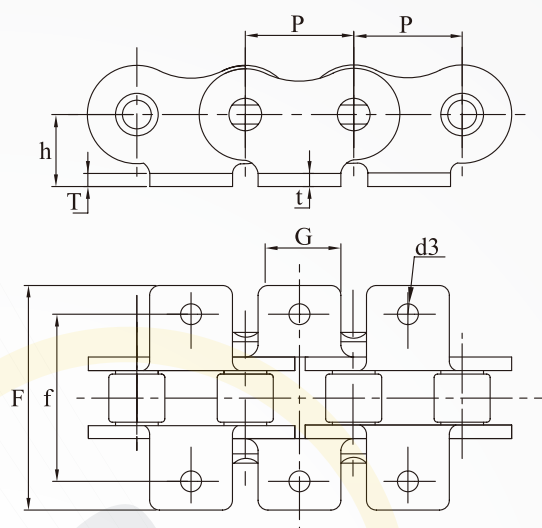

KMC 鏈號	節距	鏈片 厚度	配件 寬度	配件 尺寸			
	P	T/t	G	F	f	d3	h
	mm	mm	mm	mm	mm	mm	mm
35SS	9.525	1.20	7.92	28.60	19.04	2.60	6.40
40SS	12.70	1.50	9.50	35.00	25.40	3.60	8.50
50SS	15.875	2.00	12.70	45.20	31.76	5.20	10.60
60SS	19.05	2.35	15.90	54.00	38.10	5.20	12.20
80SS	25.40	3.20	19.05	69.60	50.80	6.80	16.10
06BSS	9.525	1.4/1.1	8.00	27.00	19.04	3.50	6.50
08BSS	12.70	1.50	9.50	36.40	25.40	4.50	8.90
10BSS	15.875	1.70	14.30	44.60	31.96	5.30	10.31
12BSS	19.05	1.80	16.00	52.20	39.10	6.40	13.46
16BSS	25.40	4.0/3.0	19.10	72.60	50.80	6.40	15.88


雙節距不鏽鋼配件鏈條

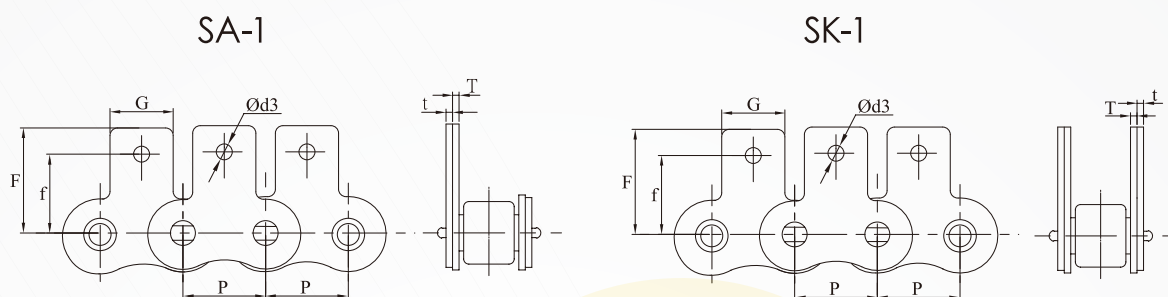


KMC 鏈號	節距	鏈片 厚度	配件 寬度	配件 尺寸		
	P	T/t	G	F	f	d3
	mm	mm	mm	mm	mm	mm
35SS	9.525	1.20	7.92	14.66	9.52	2.60
40SS	12.70	1.50	9.50	17.50	12.70	3.60
50SS	15.875	2.00	12.70	22.60	15.88	5.20
60SS	19.05	2.35	15.90	26.20	18.30	5.20
80SS	25.40	3.20	19.05	34.00	24.60	6.80
06BSS	9.525	1.4/1.1	8.00	13.50	9.52	3.50
08BSS	12.70	1.50	9.50	18.90	13.35	4.50
10BSS	15.875	1.70	14.30	22.95	16.50	5.30
12BSS	19.05	1.80	16.00	28.60	21.45	6.40
16BSS	25.40	4.0/3.0	19.10	34.00	23.15	6.40

雙節距不鏽鋼配件鏈條


A-1

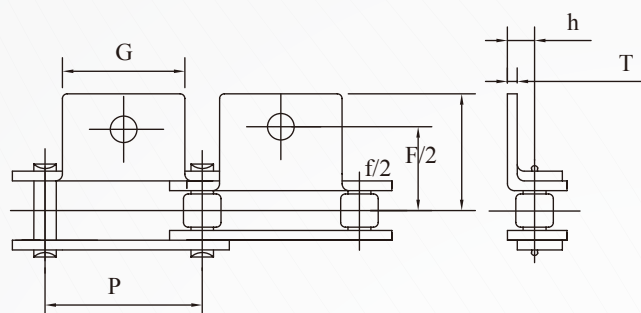


K-1

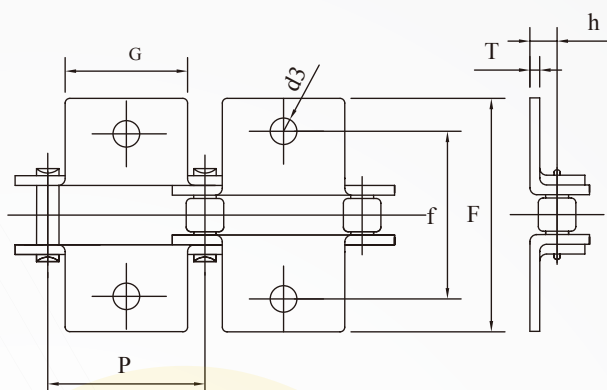

A-2

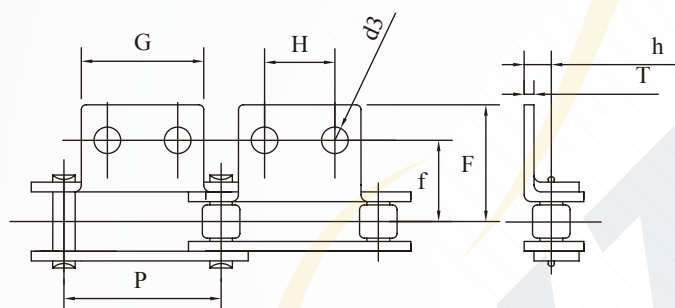


K-2

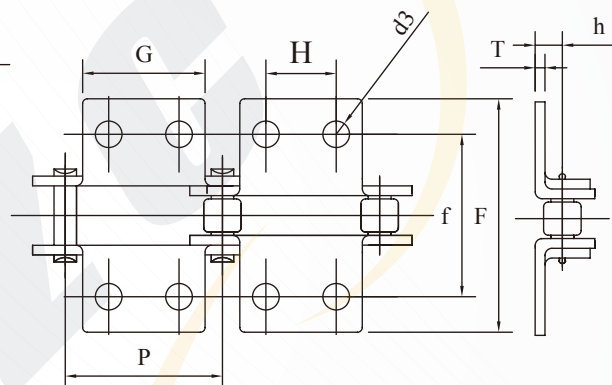


KMC 鏈號	節距	配件 寬度	鏈片 厚度	配件 尺寸				
	P	G	T	H	f	F	h	d3
	mm	mm	mm	mm	mm	mm	mm	mm
C2040SS	25.40	19.10	1.50	9.52	25.40	38.40	9.20	3.60
C2042SS								5.20
C2050SS	31.75	23.80	2.00	11.91	31.76	48.56	11.10	5.20
C2052SS								6.80
C2060HSS	38.10	28.80	3.20	14.30	42.90	62.74	14.30	5.50
C2062HSS								
C2080HSS	50.80	38.10	4.00	19.10	55.60	83.60	19.10	6.80
C2082HSS								

雙節距不鏽鋼配件鏈條

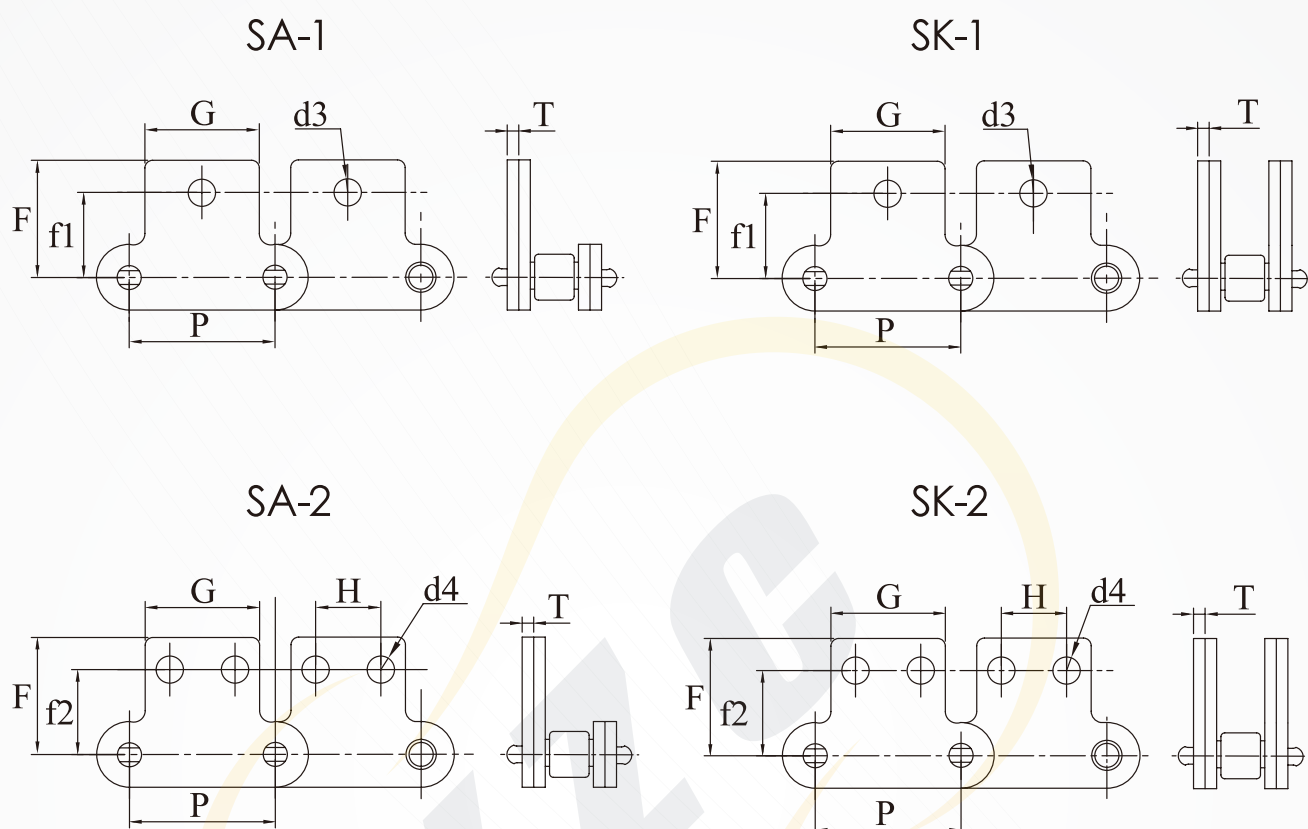

KMC 鏈號	節距	配件 寬度	鏈片 厚度	配件 尺寸					
	P	G	T	H	f1	f2	F	d4	d3
	mm	mm	mm	mm	mm	mm	mm	mm	mm
C2040SS	25.40	19.10	1.50	9.52	11.12	13.50	19.80	3.60	5.20
C2042SS									
C2050SS	31.75	23.80	2.00	11.91	14.27	15.88	24.60	5.20	6.80
C2052SS									
C2060HSS	38.10	28.80	3.20	14.30	17.48	19.05	30.65	5.20	8.70
C2062HSS									
C2080HSS	50.80	38.10	4.00	19.10	22.20	25.40	41.40	6.80	10.30
C2082HSS									

鏈條聯軸器

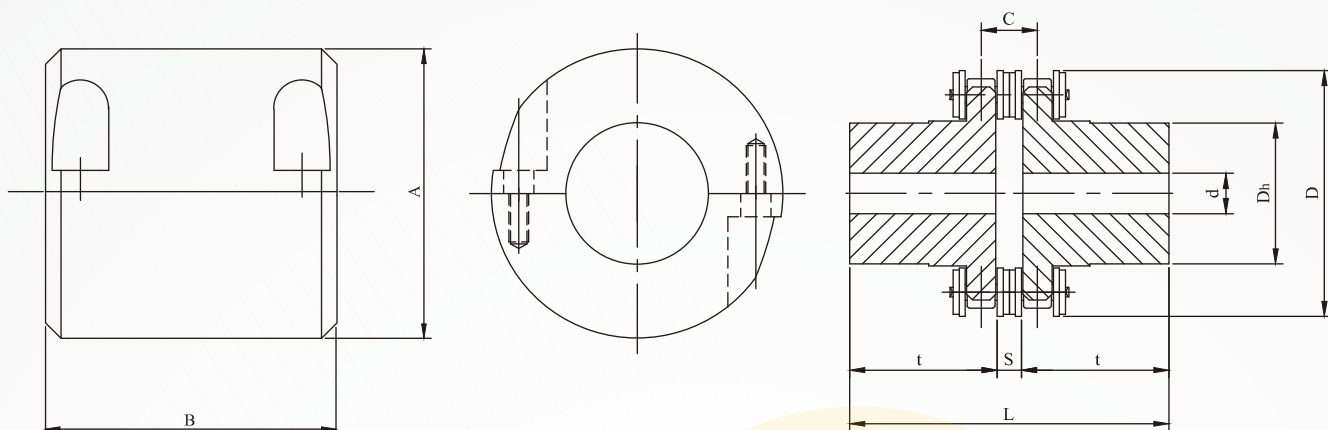


Dh : 輪轂直徑(凸台) A : 外殼直徑
D : 直徑(外徑) B : 外殼總長
d : 孔徑(內孔孔徑) L : 聯軸器總長

單位 : mm

聯軸器號	鏈條節距	聯軸器										殼		
		標準孔徑	軸徑		外徑	總長	凸台直徑	t	s	c	概重(kg)	外殼直徑	外殼總長	概重(kg)
			最小	最大										
3012	9.525	12	13.5	16	45	65	27.2	29.5	6	10.1	0.31	69	63	0.22
4012	12.7	12	14	22	62	79.4	36	36	7.4	14.4	0.73	77	72	0.3
4014		12	14	28	69	79.4	45	36			1.12	84	75	0.31
4016		13.5	16	32	77	87.4	51.5	40			1.5	92	72	0.35
5014	15.875	14.5	17	35	86	99.7	56	45	9.7	18.1	2.15	101	85	0.47
5016		14.5	18	40	96	99.7	64	45			2.75	110	87	0.5
5018		16	18	45	106	99.7	73.5	45			3.6	122	85	0.6
6018	19.05	20	22	56	127	123.5	89.5	56	11.5	22.8	6.55	147	105	1.2
6020		20	24	60	139	123.5	102.5	56			8.38	158	105	1.2
6022		20	28	71	151	123.5	115	56			10.4	168	117	1.2
8018	25.4	20	32	80	169	141.2	125	63	15.2	29.3	13.2	190	129	1.9
8020		20	36	90	185	145.2	125	65			16.2	210	137	2.5
8022		20	40	100	202	157.2	142	71			21.8	226	137	2.7
10020	31.75	25	45	110	233	178.8	162	80	18.8	35.8	32.4	281	153	4.1
12018	38.1	35	50	125	256	202.7	173	90	22.7	45.4	43.2	307	181	5.2
12022		35	56	140	304	222.7	213	100			69.1	357	181	6.7


齒 條

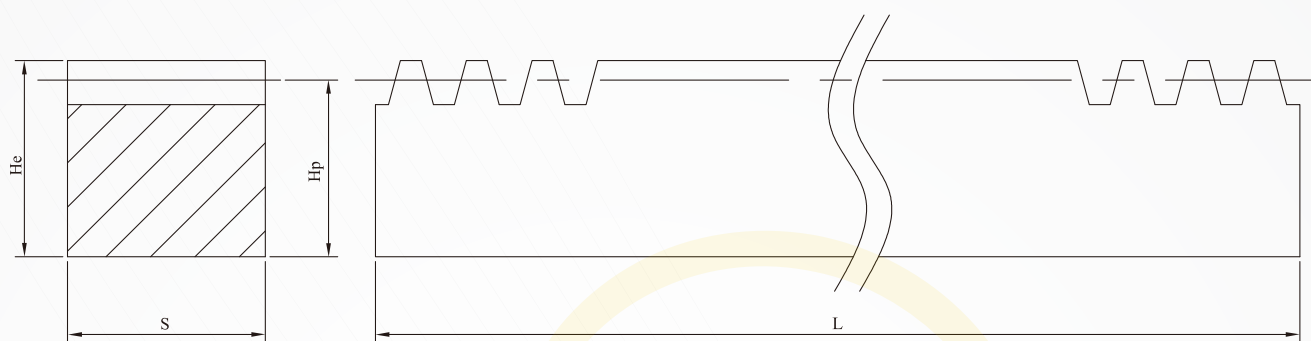

壓力角：20° 材質：C45

模數	節線高	截面高x截面寬	名義尺寸 L								
			500			1000			2000		
			齒數	總長	概重 (kg)	齒數	總長	概重 (kg)	齒數	總長	概重 (kg)
1	14	15x15	159	449.51	0.82	318	999.02	1.5	636	1998.05	3.1
1.5	15.5	17x17	106	449.51	1	212	999.02	2	424	1998.05	4
2	18	20x20	80	502.65	1.4	159	999.02	2.7	318	1998.05	5.4
2.5	22.5	25x25	64	502.65	2.1	127	997.45	4.3	255	2002.77	8.6
3	27	30x30	53	499.51	3.1	106	999.02	6.3	212	1998.05	12.5
4	21	25x25	40	502.65	1.8	80	1005.31	3.65	159	1998.05	7.3
4	26	30x30	40	502.65	3.05	80	1005.31	6	159	1998.05	11.9
4	36	40x40	40	502.65	5.5	80	1005.31	11.1	159	1998.05	22
5	45	50x50	32	502.65	8.3	64	1005.31	17.5	128	2010.31	34.6
6	54	60x60	27	508.93	12.65	53	999.02	25	106	1998.05	51
8	72	80x80	20	502.65	21.4	40	1005.31	42.7	80	2010.62	85.4

雙節距鏈輪 (大滾子)

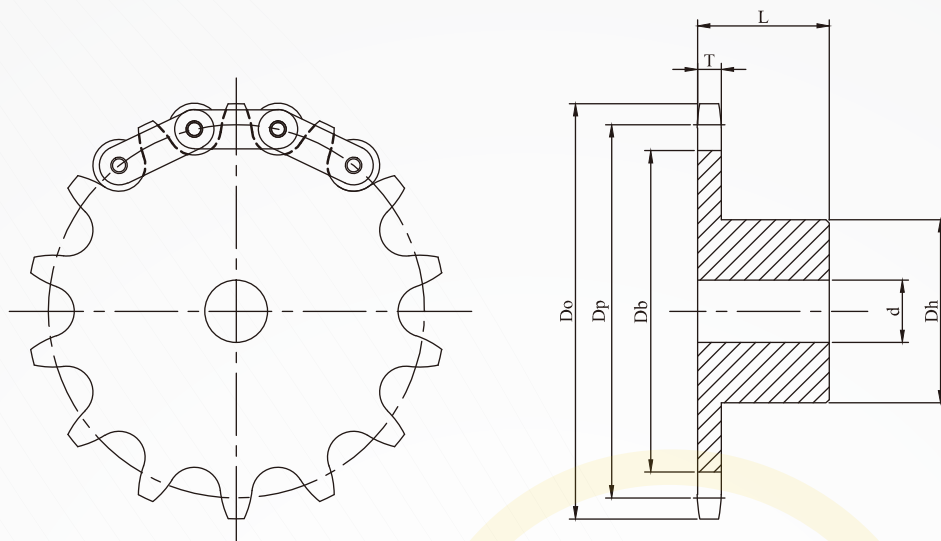

Dp : 節圓直徑
 Do : 直徑(外徑)
 Db : 齒底徑(測量距)
 Dh : 輪轂直徑(凸台)
 d : 孔徑(內孔孔徑)
 T : 齒厚
 L : 總長度

2042 (T=7.2) P=25.4 b1=7.85 Dr=15.88

單位 : mm

工作齒數	節圓直徑	外徑	測量距	孔徑		凸台		概重 (kg)
				最小	最大	直徑	總長	
10	82.2	93	66.32	19.1	35	56	40	0.85
11	90.16	102	73.36	19.1	35	56	40	0.91
12	98.14	110	82.26	19.1	35	56	40	0.97
13	106.14	118	89.48	19.1	35	56	40	1.05
14	114.15	127	98.27	19.1	35	56	40	1.12
15	122.17	135	105.62	19.1	42	65	40	1.43
16	130.2	143	114.32	19.1	42	65	40	1.52
18	146.27	159	130.39	19.1	42	65	40	1.72
20	162.37	176	146.49	19.1	46	70	40	2.21
24	194.6	208	178.72	25	50	75	45	2.97
25	202.66	216	186.38	25	50	75	50	3.12
26	210.72	224	194.84	25	50	75	50	3.26
28	226.86	241	210.98	25	50	75	50	3.58
30	243	257	227.12	25	50	75	50	3.91

2062 (T=11.7) P=38.1 b1=12.57 Dr=22.23

單位 : mm

工作齒數	節圓直徑	外徑	測量距	孔徑		凸台		概重 (kg)
				最小	最大	直徑	總長	
10	123.3	140	101.07	25.4	52	80	45	2.23
11	135.24	153	111.63	25.4	52	80	45	2.45
12	147.21	165	124.98	25.4	52	80	45	2.7
13	159.2	177	135.81	25.4	52	80	45	2.97
14	171.22	190	148.99	25.4	52	80	45	3.25
15	183.25	202	160.02	25	57	85	50	3.94
16	195.29	214	173.06	25	57	85	50	4.27
18	219.41	239	197.18	25	57	85	55	5.19
20	243.55	263	221.32	25	57	85	55	6
24	291.9	312	269.67	25	57	85	55	7.87
25	303.99	324	281.16	25	57	85	55	8.39
26	316.09	337	293.86	25	57	85	55	8.93
28	340.29	361	318.06	25	63	95	65	11.1
30	364.5	385	342.27	25	63	95	65	12.3

2052 (T=8.7) P=31.75 b1=9.4 Dr=19.05

單位 : mm


工作齒數	節圓直徑	外徑	測量距	孔徑		凸台		概重 (kg)
				最小	最大	直徑	總長	
10	102.75	117	83.7	25.4	46	70	45	1.49
11	112.7	127	92.5	25.4	46	70	45	1.6
12	122.67	138	103.62	25.4	46	70	45	1.73
13	132.67	148	112.65	25.4	46	70	45	1.86
14	142.68	158	123.63	25.4	46	70	45	2.01
15	152.71	168	132.82	25.4	46	70	45	2.17
16	162.74	179	143.69	25.4	46	70	45	2.24
18	182.84	199	163.79	25.4	46	70	45	2.71
20	202.96	220	183.91	25.4	50	75	50	3.45
24	243.25	260	224.2	25	57	85	60	5.23
25	253.32	270	233.78	25	57	85	60	5.5
26	263.4	281	244.35	25	57	85	60	5.78
28	283.57	301	264.52	25	57	85	60	6.37
30	303.75	321	284.7	25	57	85	60	7

2082 (T=14.6) P=50.8 b1=15.75 Dr=28.58

單位 : mm

工作齒數	節圓直徑	外徑	測量距	孔徑		凸台		概重 (kg)
				最小	最大	直徑	總長	
10	164.39	187	135.81	25	63	95	65	4.9
11	180.31	204	149.9	25	63	95	65	5.48
12	196.28	220	167.7	25	63	95	65	6.02
13	212.27	237	182.14	25	63	95	65	6.61
14	228.3	253	199.72	25	63	95	65	7.25
15	244.33	269	214.42	25	63	95	65	7.93
16	260.39	286	231.81	25	63	95	65	8.66
18	292.55	319	263.97	25	72	105	75	11.5
20	324.74	351	296.16	25	72	105	75	13.3
24	389.19	416	360.61	25	72	105	75	17.5
25	405.32	433	375.94	25	72	105	75	18.6
26	421.45	449	392.87	25	72	105	75	19.8
28	453.72	481	425.14	25	78	115	85	23.9
30	485.99	514	457.41	25	78	115	85	26.7

雙節距鏈輪 (小滾子)

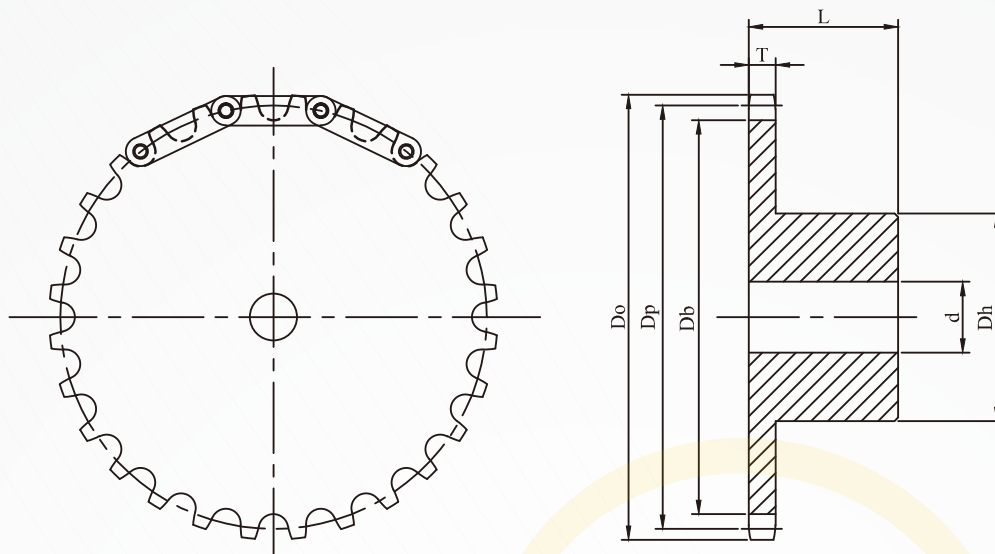

D_p : 節圓直徑
 D_o : 直徑(外徑)
 D_b : 齒底徑(測量距)
 D_h : 輪轂直徑(凸台)
 d : 孔徑(內孔孔徑)
 T : 齒厚
 L : 總長度

2040(T=7.2) P=25.4 b1=7.85 Dr=7.95

單位 : mm 2060(T=11.7) P=38.1 b1=12.57 Dr=11.91

單位 : mm

齒數	工作齒數	節徑	外徑	測量距	孔徑		凸台		概重 (kg)
					最小	最大	直徑	總長	
15	7 1/2	62.45	67	54.16					
17	8 1/2	70.31	76	62.06					
18	9	74.26	80	66.31					
19	9 1/2	78.23	84	70.01	12.7	30	50	30	0.59
20	10	82.2	88	74.25	12.7	35	56	40	0.9
21	10 1/2	86.17	92	77.98	12.7	35	56	40	0.93
22	11	90.16	96	82.21	12.7	35	56	40	0.96
23	11 1/2	94.15	100	85.98	12.7	35	56	40	0.99
24	12	98.14	104	90.19	12.7	35	56	40	1.02
25	12 1/2	102.14	108	93.98	12.7	35	56	40	1.06
26	13	106.14	112	98.19	12.7	35	56	40	1.1
27	13 1/2	110.14	116	102	12.7	35	56	40	1.13
28	14	114.15	120	106.2	12.7	35	56	40	1.17
29	14 1/2	118.16	124	110.03	12.7	35	56	40	1.21

齒數	工作齒數	節徑	外徑	測量距	孔徑		凸台		概重 (kg)
					最小	最大	直徑	總長	
15	7 1/2	93.67	101	81.25					
17	8 1/2	105.47	113	93.11					
18	9	111.4	119	99.49					
19	9 1/2	117.34	126	105.03	19.1	46	70	40	1.76
20	10	123.3	132	111.39	19.1	52	80	45	2.31
21	10 1/2	129.26	138	116.99	19.1	52	80	45	2.42
22	11	135.24	144	123.33	19.1	52	80	45	2.53
23	11 1/2	141.22	150	128.98	19.1	52	80	45	2.65
24	12	147.21	156	135.3	19.1	52	80	45	2.78
25	12 1/2	153.2	162	140.99	19.1	52	80	45	2.91
26	13	159.2	168	147.29	19.1	52	80	45	3.04
27	13 1/2	165.21	174	153.02	19.1	52	80	45	3.18
28	14	171.22	181	159.31	19.1	57	85	45	3.5
29	14 1/2	177.23	187	165.06	19.1	57	85	45	3.65

2050(T=8.7) P=31.75 b1=9.4 Dr=10.16



單位 : mm 2080(T=14.6) P=50.8 b1=15.75 Dr=15.88

單位 : mm


齒數	工作齒數	節徑	外徑	測量距	孔徑		凸台		概重 (kg)
					最小	最大	直徑	總長	
15	7 1/2	78.06	84	67.47					
17	8 1/2	87.89	94	77.36					
18	9	92.83	100	82.67					
19	9 1/2	97.78	105	87.29	12.7	42	65	40	1.29
20	10	102.75	110	92.59	19.1	46	70	45	1.56
21	10 1/2	107.72	115	97.26	19.1	46	70	45	1.62
22	11	112.7	120	102.54	19.1	46	70	45	1.68
23	11 1/2	117.68	125	107.25	19.1	46	70	45	1.74
24	12	122.67	130	112.51	19.1	46	70	45	1.8
25	12 1/2	127.67	135	117.26	19.1	46	70	45	1.87
26	13	132.67	140	122.51	19.1	46	70	45	1.94
27	13 1/2	137.67	145	127.28	19.1	46	70	45	2.01
28	14	142.68	150	132.52	19.1	46	70	45	2.09
29	14 1/2	147.69	155	137.32	19.1	46	70	45	2.16

齒數	工作齒數	節徑	外徑	測量距	孔徑		凸台		概重 (kg)
					最小	最大	直徑	總長	
15	7 1/2	124.9	135	108.33					
17	8 1/2	140.62	151	124.15					
18	9	148.53	159	132.65					
19	9 1/2	156.45	167	140.04	25.4	60	90	50	3.77
20	10	164.39	176	148.51	25.4	60	90	60	4.46
21	10 1/2	172.34	184	155.99	25.4	60	90	60	4.7
22	11	180.31	192	164.43	25	60	92	59	5.02
23	11 1/2	188.29	200	171.97	25	60	92	59	5.28
24	12	196.28	208	180.4	25	60	92	59	5.56
25	12 1/2	204.27	216	187.99	25	60	92	59	5.85
26	13	212.27	224	196.39	25	60	92	59	6.15
27	13 1/2	220.28	233	204.03	25	60	92	59	6.46
28	14	228.3	241	212.42	25	60	92	59	6.78
29	14 1/2	236.31	249	220.09	25	60	92	59	7.12


輸送鏈輪 椿本式

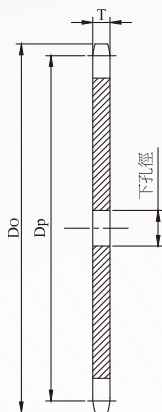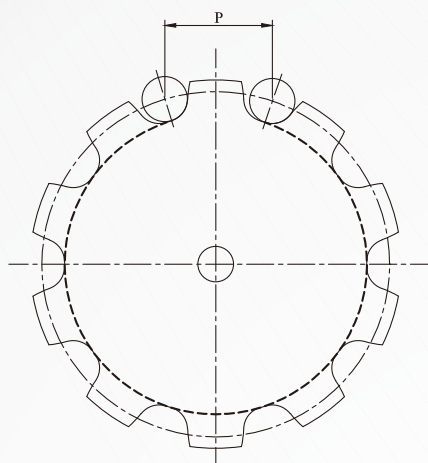

A型

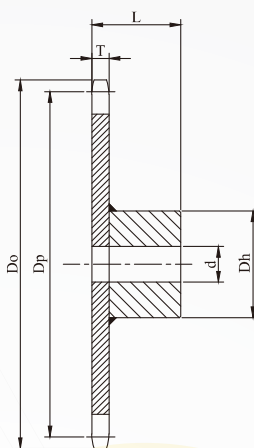

BW型

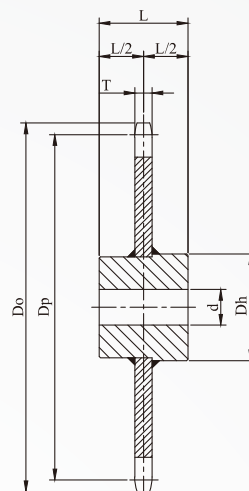

CW型

Dp : 節圓直徑
Do : 直徑(外徑)


Dh : 輪轂直徑(凸台)
d : 孔徑(內孔孔徑)

T : 齒厚
L : 總長度

編號	形式	齒數	節距徑	直徑	齒厚	孔徑範圍	輪轂直徑	總長度	概量 (kg)
03075	R	6	150	158	12	25~40	65	52	3
		8	196	209		25~45	70	57	4.5
		10	242.7	259		25~50	75	62	6
		12	289.8	308		25~50	75	62	8
	F	6	150	158	9	25~40	65	49	2.5
		8	196	209		25~45	70	54	3.5
		10	242.7	259		25~50	75	59	5
		12	289.8	308		25~50	75	59	6.5
	S	6	150	158	12	25~40	65	52	3
		7 1/2	184.4	194		25~45	70	57	4
		8	296	206		25~45	70	57	4.5
		10	242.7	252		25~50	75	62	6.5
03100	R	6	200	206	12	25~45	70	57	4.5
		8	261.3	272		25~50	75	62	6.5
		10	323.6	336		25~50	75	62	9.5
		12	386.4	401		25~55	85	67	14
	F	6	200	206	9	25~45	70	54	3.5
		8	261.3	272		25~50	75	59	5.5
		10	323.6	336		25~50	75	59	7.5
		12	386.4	401		25~55	85	64	11
	S	6	200	210	12	25~45	70	57	4.5
		7 1/2	245.9	253		25~50	75	62	6
		8	261.3	269		25~50	75	62	7
		10	323.6	333		25~50	75	62	10
430	R	6	203.2	211	16	25~55	85	71	6
		8	265.5	277		25~60	90	76	10
		10	328.8	345		30~65	100	81	14
		12	392.6	411		30~65	100	81	19
	S	6	203.2	215	16	25~55	80	71	6.5
		7 1/2	249.8	260		25~60	90	76	9
		8	265.5	277		25~60	90	76	11
		10	328.8	341		30~65	100	81	15
		12	392.6	405		30~65	100	81	20
		12 1/2	408.5	421		30~65	100	81	20

編號	形式	齒數	節距徑	直徑	齒厚	孔徑範圍	輪轂直徑	總長度	概重 (kg)
05075	R	8	196	213	16	25~60	90	76	6.5
		10	242.7	263		30~65	100	81	9
		12	289.8	312		30~65	100	81	12
	F	8	196	213	12	25~60	90	72	5.5
		10	242.7	263		30~65	100	77	8
		12	289.8	312		30~65	100	77	10
	S	8	196	209	16	25~60	90	76	7
		10	242.7	256		30~65	100	81	10
		12	289.8	303		30~65	100	81	13
05100	R	6	200	205	16	25~60	90	76	6.5
		8	261.3	273		30~65	100	81	10
		10	323.6	340		30~65	100	81	14
		12	386.4	405		30~75	110	91	20
	F	6	200	205	12	25~60	90	72	6
		8	261.3	273		30~65	100	77	9
		10	323.6	340		30~65	100	77	12
		12	386.4	405		30~75	110	87	17
	S	6	200	212	16	25~60	90	76	7.5
		7 1/2	245.9	257		30~65	100	81	10
		8	261.3	273		30~65	100	81	11
		10	323.6	337		30~65	100	81	15
	12	386.4	400	30~75	110	91	21		
	12 1/2	402.1	416	30~75	110	91	22		
05150	R	6	300	304	16	30~65	100	81	12
		8	392	402		30~75	110	91	20
		10	485.4	500		35~80	120	96	30
		12	579.6	596		35~85	130	101	41
	F	6	300	304	12	30~65	100	77	11
		8	392	402		30~75	110	87	17
		10	485.4	500		35~80	120	92	24
		12	579.6	596		35~85	130	97	33
	S	6	300	310	16	30~65	100	81	13
		7 1/2	368.8	369		30~75	110	91	19
		8	392	405		30~75	110	91	21
		10	485.4	499		35~80	120	96	31
12		579.6	592	35~85		130	101	42	
12 1/2		603.2	616	35~85		130	101	44	

輸送鏈輪 椿本式

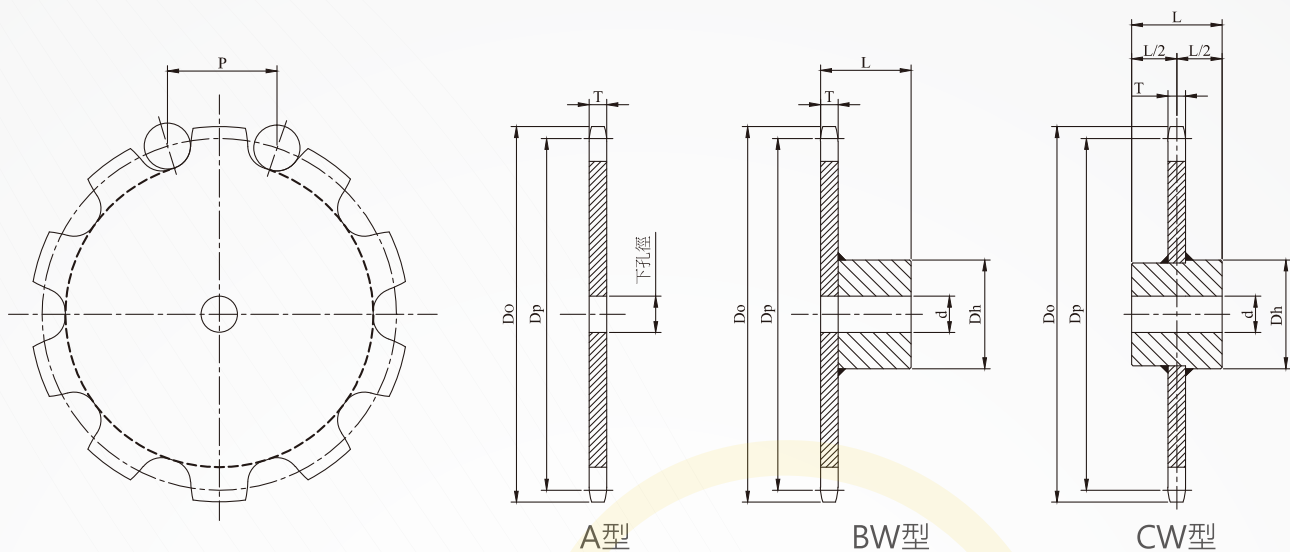


Dp : 節圓直徑
Do : 直徑(外徑)
Dh : 輪轂直徑(凸台)
d : 孔徑(內孔孔徑)
T : 齒厚
L : 總長度

編號	形式	齒數	節距	直徑	齒厚	孔徑範圍	輪轂直徑	總長度	概重(kg)
204	S	8	173.2	187	19	25~60	90	75	6.5
		10	214.5	228	19	30~65	100	84	9.5
		12	266	269	19	30~65	100	84	12
450	R	6	203.2	217	19	25~60	90	79	7
		8	265.5	286	19	30~65	100	84	12
		10	328.8	354	19	30~75	110	94	18
	F	6	203.2	217	16	25~60	90	76	6.5
		8	265.5	286	16	30~65	100	81	11
		10	328.8	354	16	30~75	110	91	16
	S	12	392.6	419	16	30~75	110	91	20
		6	203.2	217	19	25~60	90	79	8
		7 1/2	249.8	263	19	30~65	100	84	11
		8	265.5	279	19	30~65	100	84	13
		10	328.8	342	19	30~75	110	94	19
		12	392.6	406	19	30~75	110	94	24
08150	R	6	300	311	19	30~75	110	94	15
		8	392	410	19	30~75	110	94	23
		10	485.4	507	19	35~80	120	99	34
	F	6	300	311	16	30~75	110	91	14
		8	392	410	16	30~75	110	91	20
		10	485.4	507	16	35~80	120	96	30
	S	12	579.6	604	16	35~85	130	101	42
		6	300	313	19	30~75	110	94	16
		7 1/2	368.8	378	19	30~75	110	94	22
		8	392	403	19	30~75	110	94	24
		10	485.4	499	19	35~80	120	99	35
		12	579.6	593	19	35~85	130	104	49
650	R	6	304.8	321	22	30~75	110	97	18
		8	398.2	422	22	30~75	110	97	27
		10	493.2	521	22	35~80	120	102	39
	F	6	304.8	321	16	30~75	110	91	14
		8	398.2	422	16	30~75	110	91	21
		10	493.2	521	16	35~80	120	96	31
	S	12	588.8	618	16	35~85	130	101	43
		6	304.8	320	22	30~75	110	97	19
		7 1/2	374.7	390	22	30~75	110	97	24

編號	形式	齒數	節距	直徑	齒厚	孔徑範圍	輪轂直徑	總長度	概重(kg)
10100	S	8	398.2	414	22	30~75	110	97	28
		10	493.2	509	22	35~80	120	102	41
		12	588.8	604	22	35~85	130	107	57
	R	6	200	214	22	30~75	110	97	10
		8	261.3	282	22	30~75	110	97	14
		10	323.6	349	22	35~80	120	102	20
	F	6	200	214	16	30~75	110	91	9
		8	261.3	282	16	30~75	110	91	12
		10	323.6	349	16	35~80	120	96	17
	S	12	386.4	414	16	35~85	130	101	22
		6	200	217	22	30~75	110	97	11
		8	261.3	279	22	30~70	110	97	15
10150	R	6	300	309	22	35~80	120	102	18
		8	392	408	22	35~85	130	107	29
		10	485.4	506	22	40~95	140	117	42
	F	6	300	309	16	35~80	120	196	15
		8	392	408	16	35~85	130	101	24
		10	485.4	506	16	40~95	140	111	34
	S	12	579.6	601	16	40~100	150	116	46
		6	300	316	22	35~80	120	102	19
		7 1/2	368.8	378	22	35~85	130	107	26
		8	392	409	22	35~85	130	107	30
		10	485.4	503	22	40~95	140	117	43
		12	579.6	597	22	40~100	150	122	60
205	S	6	204.1	223	28	30~75	110	103	12
		8	252.8	272	28	35~80	120	108	17
		10	301.8	321	28	35~85	130	113	24
	R	6	203.2	230	25	30~75	110	100	12
		8	265.5	292	25	35~80	120	105	17
		10	328.8	356	25	35~85	130	110	25
	S	12	392.6	419	25	40~95	140	120	34
		6	203.2	222	25	30~75	110	100	13
		8	265.5	285	25	35~80	120	105	18
		10	328.8	348	25	35~85	130	110	26
		12	392.6	412	25	40~95	140	120	35

輸送鏈輪 椿本式

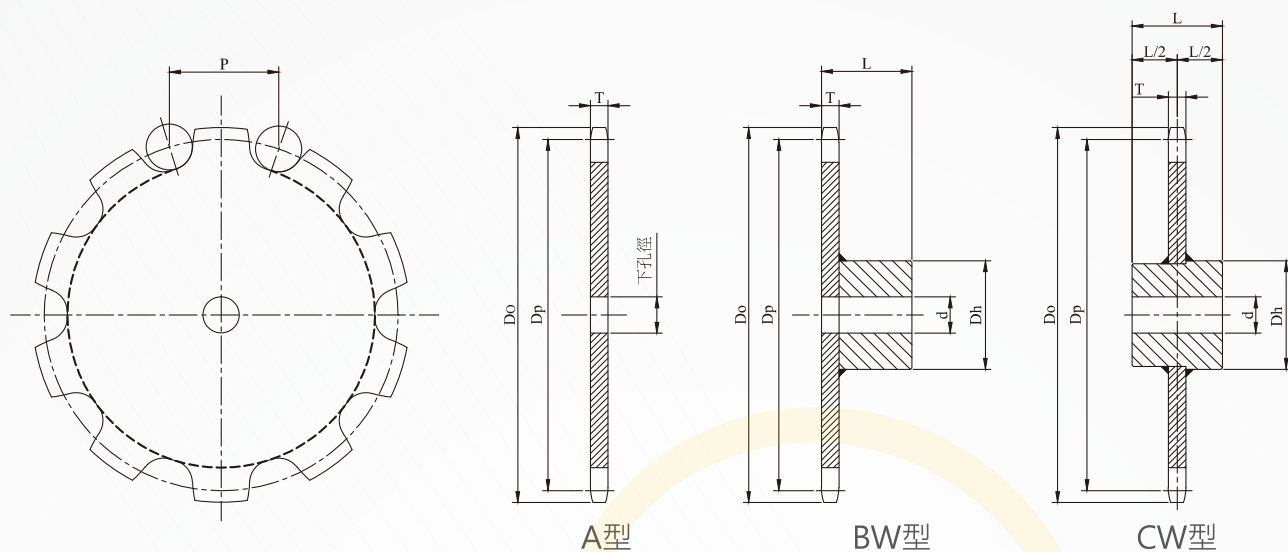


D_p : 節圓直徑
 D_o : 直徑(外徑)
 D_h : 輪轂直徑(凸台)
 d : 孔徑(內孔孔徑)
 T : 齒厚
 L : 總長度

編號	形式	齒數	節距徑	直徑	齒厚	孔徑範圍	輪轂直徑	總長度	概重(kg)
6205	R	6	304.8	330	28	40~95	140	115	25
		8	398.2	432	28	40~100	150	125	39
		10	493.2	528	28	45~110	160	135	56
		12	588.8	623	28	50~120	180	150	81
	F	6	304.8	330	19	40~95	140	115	21
		8	398.2	432	19	40~100	150	125	32
		10	493.2	528	19	45~110	160	135	45
		12	588.8	623	19	50~120	180	150	64
	S	6	304.8	325	28	40~95	140	115	27
		7 1/2	374.7	396	28	40~100	150	125	35
		8	398.2	419	28	40~100	150	125	41
		10	493.2	514	28	45~110	160	135	59
12200	R	6	400	418	28	40~100	150	125	39
		8	522.6	551	28	45~110	160	135	61
		10	647.2	682	28	50~120	180	150	94
		12	772.7	810	28	50~130	190	160	129
	F	6	400	418	19	40~100	150	125	32
		8	522.6	551	19	45~110	160	135	48
		10	647.2	682	19	50~120	180	150	73
		12	772.7	810	19	50~130	190	160	99
	S	6	400	421	28	40~100	150	125	41
		7 1/2	491.7	510	28	45~110	160	135	56
		8	522.6	544	28	45~110	160	135	64
		10	647.2	668	28	50~120	180	150	97
	R	6	550	515	28	45~110	160	135	56
		8	653.3	680	28	50~120	180	150	95
		10	809	841	28	50~130	190	160	141
		12	965.9	1002	28	55~145	210	180	198

編號	形式	齒數	節距徑	直徑	齒厚	孔徑範圍	輪轂直徑	總長度	概重(kg)
12250	F	6	500	515	19	45~110	160	135	45
		8	653.3	680	19	50~120	180	150	73
		10	809	841	19	50~130	190	160	106
		12	965.9	1002	19	55~145	210	180	149
	S	6	500	521	28	45~110	160	135	59
		7 1/3	614.6	623	28	50~120	180	150	88
		8	653.3	674	28	50~120	180	150	98
		10	809	830	28	50~130	190	160	143
		12	965.9	987	28	55~145	210	180	202
		12 1/2	1005.3	1026	28	55~145	210	180	214
212	R	6	304.8	339	28	40~100	150	125	27
		8	398.2	440	28	45~110	160	135	42
		10	493.2	535	28	50~120	180	150	63
		12	588.8	631	28	50~130	190	160	87
	S	6	304.8	329	28	40~100	150	125	29
		8	398.2	422	28	45~110	160	135	44
		10	493.2	517	28	50~120	180	150	66
		12	589.8	613	28	50~130	190	160	89
17200	R	6	400	426	40	45~110	160	135	51
		8	522.6	562	40	50~120	180	150	86
		10	647.2	691	40	50~130	190	160	126
		12	772.7	821	40	55~145	210	180	179
	F	6	400	426	28	45~110	160	135	42
		8	522.6	562	28	50~120	180	150	68
		10	647.2	691	28	50~130	190	160	98
		12	772.7	821	28	55~145	210	180	140
	S	6	400	424	40	45~110	160	135	55
		7 1/2	492.7	516	40	50~120	180	150	77
		8	522.6	547	40	50~120	180	150	90
		10	647.2	671	40	50~130	190	160	131
	R	6	550	515	28	45~110	160	135	56
		8	653.3	680	28	50~120	180	150	95
		10	809	841	28	50~130	190	160	141
		12	965.9	1002	28	55~145	210	180	198

輸送鏈輪 樁本式

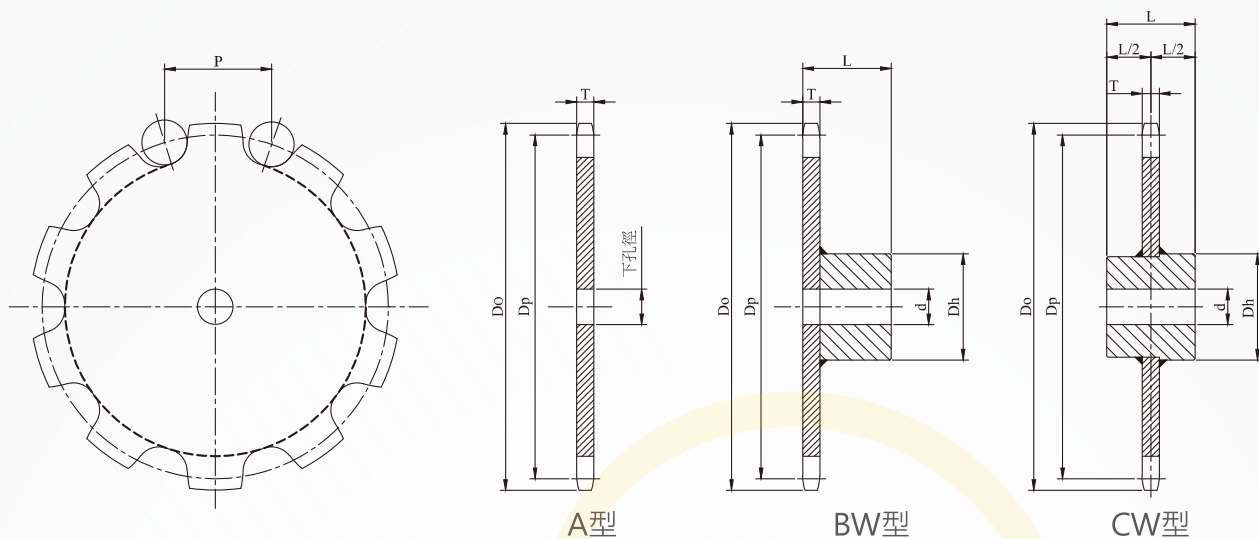


Dp : 節圓直徑
Do : 直徑(外徑)
Dh : 輪轂直徑(凸台)
d : 孔徑(內孔孔徑)
T : 齒厚
L : 總長度

編號	形式	齒數	節距徑	直徑	齒厚	孔徑範圍	輪轂直徑	總長度	概重 (kg)
17250	R	6	500	522	40	50~120	180	130	79
		8	653.3	689	40	50~130	190	160	128
		10	809	850	40	50~145	210	180	193
		12	965.9	1012	40	55~145	210	180	262
	F	6	500	522	28	50~120	180	150	64
		8	653.3	689	28	50~130	190	160	100
		10	809	850	28	55~145	210	180	150
		12	965.9	1012	28	55~145	210	180	198
	S	6	500	524	40	50~120	180	150	83
		7 1/2	614.6	637	40	50~130	190	160	118
		8	653.3	677	40	50~130	190	160	133
		10	809	833	40	55~145	210	180	199
17300	R	6	500	524	40	50~120	180	150	83
		7 1/2	614.6	637	40	50~130	190	160	118
		8	653.3	677	40	50~130	190	160	133
		10	809	833	40	55~145	210	180	199
	F	6	500	524	40	50~120	180	150	83
		7 1/2	614.6	637	40	50~130	190	160	118
		8	653.3	677	40	50~130	190	160	133
		10	809	833	40	55~145	210	180	199
	S	6	500	524	40	50~120	180	150	83
		7 1/2	614.6	637	40	50~130	190	160	118
		8	653.3	677	40	50~130	190	160	133
		10	809	833	40	55~145	210	180	199

編號	形式	齒數	節距徑	直徑	齒厚	孔徑範圍	輪轂直徑	總長度	概重 (kg)
26250	F	6	500	530	32	50~130	190	160	75
		8	653.3	703	32	55~145	210	180	130
		10	809	860	32	55~145	210	180	170
		12	965.9	1029	32	55~150	230	200	240
	S	6	500	520	45	50~130	190	160	100
		8	653.3	683	45	55~145	210	180	170
		10	809	830	45	55~145	210	180	230
		12	965.9	999	45	55~150	230	200	320
26300	R	6	600	631	45	50~130	190	160	120
		8	783.9	829	45	55~145	210	180	210
		10	970.8	1025	45	55~160	230	200	310
		12	1159.1	1219	45	65~170	250	220	440
	F	6	600	631	32	50~130	190	160	100
		8	783.9	829	32	55~145	210	180	160
		10	970.8	1025	32	55~160	230	200	240
		12	1159.1	1219	32	65~170	250	220	340
	S	6	600	627	45	50~130	190	160	130
		8	783.9	811	45	55~145	210	180	220
		10	970.8	998	45	55~160	230	200	320
		12	1159.1	1186	45	66~170	250	220	450
36300	R	6	600	648	55	55~160	230	200	160
		8	783.9	849	55	65~175	250	220	270
		10	970.8	1046	55	75~190	270	240	400
		12	1159.1	1234	55	85~210	300	260	560
	F	6	600	648	36	55~160	230	200	130
		8	783.9	849	36	65~175	250	220	210
		10	970.8	1046	36	75~190	270	240	300
		12	1159.1	1234	36	85~210	300	260	410
	S	6	600	631	55	55~160	230	200	180
		8	783.9	814	55	65~175	250	220	280
		10	970.8	1001	55	75~190	270	240	420
		12	1159.1	1121	55	85~210	300	260	580

輸送鏈條 椿本式

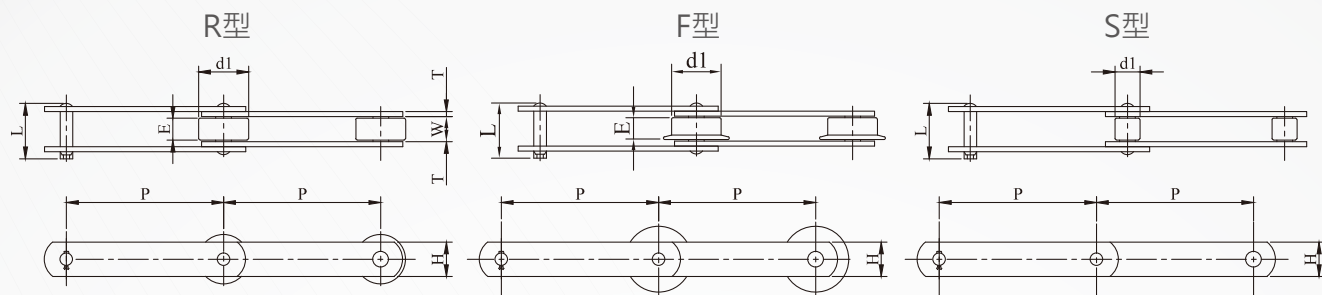


P : 節距
W : 內節寬度
E : 觸軌寬

L : 銷長
H : 鏈片高度
T : 鏈片厚度

d1 : 滾子徑

鏈條號碼	節距	滾子徑		內節寬度	觸軌寬	銷長 C銷	鏈片高	片厚	平均 抗拉強度 (kg)	R 滾子型	F 滾子型	S 滾子型
		R,F型	S型									
03075	75	31.8	15.9	16.1	12	37	22	3.2	3,000	2.7	2.8	1.9
03100	100	31.8	15.9	16.1	12	37	22	3.2	3,000	2.3	2.4	1.7
430	101.6	38.1	20.1	22.6	-	53	25.4	4.8	5,500	4.3	-	3
05075	75	-	22.2	22	-	52	32	4.5	7,000	-	-	3.4
05100	100	40	22.2	22	14	52	32	4.5	7,000	5	5.2	3.7
05150	150	40	22.2	22	14	52	32	4.5	7,000	4.1	4.2	3.2
204	66.27	-	22.2	27	-	64.5	28.6	6.3	8,000	-	-	5.6
450	101.6	44.5	22.2	27	-	64.5	28.6	6.3	8,000	6.8	-	4.6
450-F	101.6	44.5	-	30.2	20	67.5	28.6	6.3	8,000	-	7.5	-
08150-F	150	44.5	-	30.2	20	67.5	28.6	6.3	8,000	-	5.8	-
10100	100	-	29	30	-	71.5	38.1	6.3	11,500	-	-	6.8
10150	150	50.8	29	30	20	71.5	38.1	6.3	11,500	7.9	8.1	5.9
205	78.11	-	31.8	37.1	-	89	38.1	7.9	13,000	-	-	10.4
214	101.6	44.5	31.8	31.6	-	84	38.1	7.9	13,000	10.4	-	8.7
6205	152.4	57.2	34.9	37.1	25	89	44.5	7.9	19,000	12.1	12.4	9.3
12200	200	65	34.9	37.1	24	89	44.5	7.9	19,000	11.4	11.9	8.4
12250	250	65	34.9	37.1	24	89	44.5	7.9	19,000	10.3	10.6	7.8
212	152.4	69.9	40.1	37.1	-	97.5	50.8	9.5	21,000	17.1	-	12.6
17200	200	80	40.1	51.4	34	111.5	50.8	9.5	25,000	18.8	19.8	12
17250	250	80	40.1	51.4	34	111.5	50.8	9.5	25,000	16.5	17.3	11.1
17300	300	80	40.1	51.4	34	111.5	50.8	9.5	25,000	15	15.7	10.5
26250	250	100	44.5	57.2	38	121	63.5	9.5	28,500	25.3	26.5	14.7
26300	300	100	44.5	57.2	38	121	63.5	9.5	28,500	22.3	23.6	13.8
650	152.4	50.8	25.8	30.2	20	67.5	38.1	6.3	8,000	7.7	8	6
16200	200	70	-	40	27	95	44.5	7.9	16,000	12.8	13.4	-
16250	250	70	-	40	27	95	44.5	7.9	16,000	11.3	11.8	-
20200	200	75	-	44	30	105	50.8	9	21,000	16.4	17.4	-
20300	300	75	-	44	30	105	50.8	9	21,000	13.5	14.2	-
205A	78.11	-	31.8	37.1	-	91	38.1	7.9	23,000	-	-	10.4
25200	200	85	-	49	34	113	63.5	9	28,500	22.9	23.9	-
25300	300	85	-	49	34	113	63.5	9	28,500	18.5	19.1	-
26450	450	100	44.5	57.2	38	121	66.5	9.5	28,500	18	18.9	12.4
35300	300	100	-	59	40	125	76.2	9	36,500	25.6	26.8	-
36300	300	125	50.8	66.7	42	145	76.2	12.7	48,500	39	40.1	22.9
36450	450	125	50.8	66.7	42	145	76.2	12.7	48,500	30.7	31.9	20.2
36500	600	125	50.8	66.7	42	145	76.2	12.7	48,500	26.9	27.8	19
52200	300	140	57.2	77	49	176	76.2	16	54,000	48.8	52.5	29.7
52450	450	140	57.2	77	49	176	76.2	16	54,000	37.5	39.3	26.2
52600	600	140	57.2	77	49	176	76.2	16	54,000	32.9	34.3	24.4

輸送鏈條 椿本式

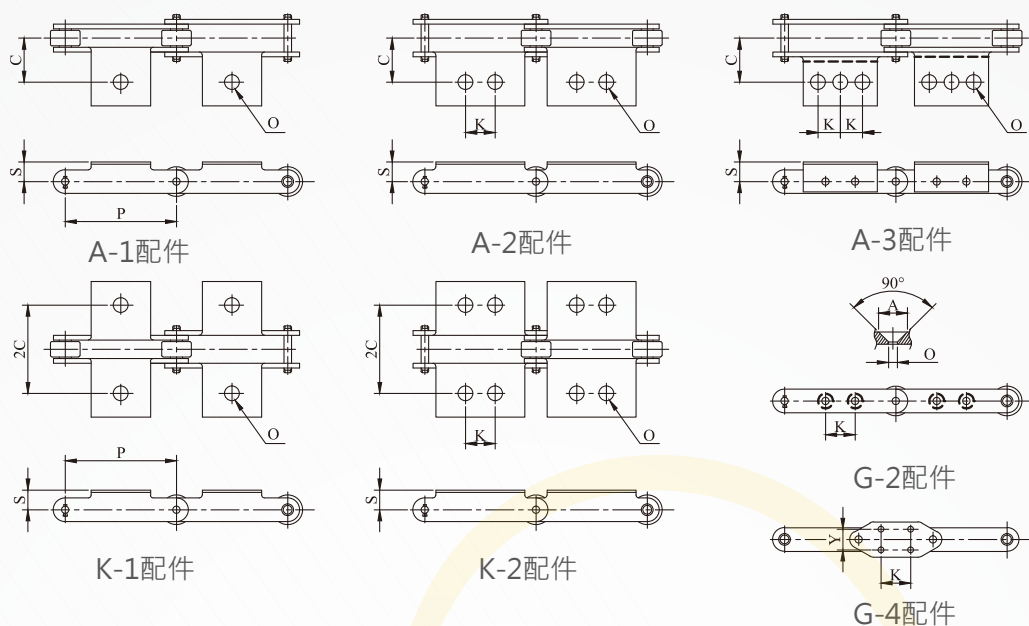

A&K配件(3為單邊，K為雙邊，1,2為配件孔數)

配件型式	鏈條號碼	配件尺寸				每節加重 (kg)
		S	C	K	O	
A-1 及 K-1	204 - S	24	45	-	11	0.08
	05075 - S	22	35	-	9.5	0.03
	205 - S	30	55	-	12	0.13
A-2 及 K2	03075 - R,(F),S	20	30	30	9.5	0.05
	205 - S	35	60	30	12	0.23
	03100 - R,(F),S	20	30	40	9.5	0.06
	05100 - R,(F),S	22	35	40	9.5	0.08
	10100 - S	28	50	40	11	0.16
	430 - R,S	22	40	40	11	0.11
	450 - R,(F),S	28	50	40	11	0.18
	214 - R,S	35	55	40	15	0.28
	8150 - (F)	28	50	60	11	0.22
	05150 - R,(F),S	22	35	60	9.5	0.1
	10150 - R,(F),S	28	50	60	11	0.2
	6205 - R,(F),S	38	60	60	15	0.37
()內屬 A-2者	212 - R,S	45	65	60	15	0.49
	650 - R,(F),S	32	50	60	11	0.22
	12200 - R,F,S	38	60	80	15	0.45
	17200 - R,F,S	45	75	80	15	0.66
	12250 - R,F,S	38	60	120	15	0.62
	17250 - R,F,S	45	75	125	15	0.79
	16200 - R,F	35	65	80	15	0.45
	20200 - R,F	40	70	80	15	0.5
	25200 - R,F	45	75	80	15	0.58
	16250 - R,F	35	76	125	15	0.62
A-2 使用 角鐵	35300 - R,F	50	80	180	15	1.03
	17300 - R,F,S	45	75	180	15	1.34
	26300 - R,F,S	55	80	180	15	2.22
	20300 - R,F	40	70	180	15	1.34
	25300 - R,F	45	75	180	15	2.22
A-3 使用 角鐵	26450 - R,F,S	55	80	140	15	3.26
	36450 - R,F,S	70	100	140	19	5.07
	52450 - R,F	80	120	140	22	6.3
	36600 - R,F,S	70	100	180	19	6.26
	52600 - R,F	80	120	180	22	7.8


G-2 配件

鏈條號碼	配件尺寸		
	K	O	A
5100 - R,F,S	40	9.5	14
5150 - R,F,S	60	9.5	14
10150 - R,F,S	60	11	19.5
10100 - S	35	11	19.5
6205 - R,F,S	50	15	27
12200 - R,F,S	80	15	27
17200 - R,F,S	70	15	27
12250 - R,F,S	125	15	27
17250 - R,F,S	110	15	27
17300 - R,F,S	150	15	27
26300 - R,F,S	140	15	27
650 - R,F	60	11	19.5
16200 - R,F,S	80	15	27
20200 - R,S	80	15	27
25200 - R,S	80	15	27
16200 - R,F,S	125	15	27
20300 - R,F,S	150	15	27
25300 - R,F,S	150	15	27
35300 - R,F,S	140	15	27
26450 - R,F,S	220	15	27
36450 - R,F,S	220	19	22
52450 - R,F,S	200	22	38
36600 - R,F,S	300	19	32
52600 - R,F,S	300	22	38

G-4 配件

鏈條號碼	配件尺寸			
	K	Y	O	A
10150 - S	75	70	11	19.5
6205 - S	75	70	15	27
12200 - S	100	70	15	27
17200 - S	100	80	15	27
26250 - S	140	100	15	27
26300 - S	180	100	15	27
650 - S	75	70	11	19.5
26200 - S	100	80	15	27
36250 - S	140	100	19	32
36300 - S	180	100	19	32


DLD型加固型輸送鏈

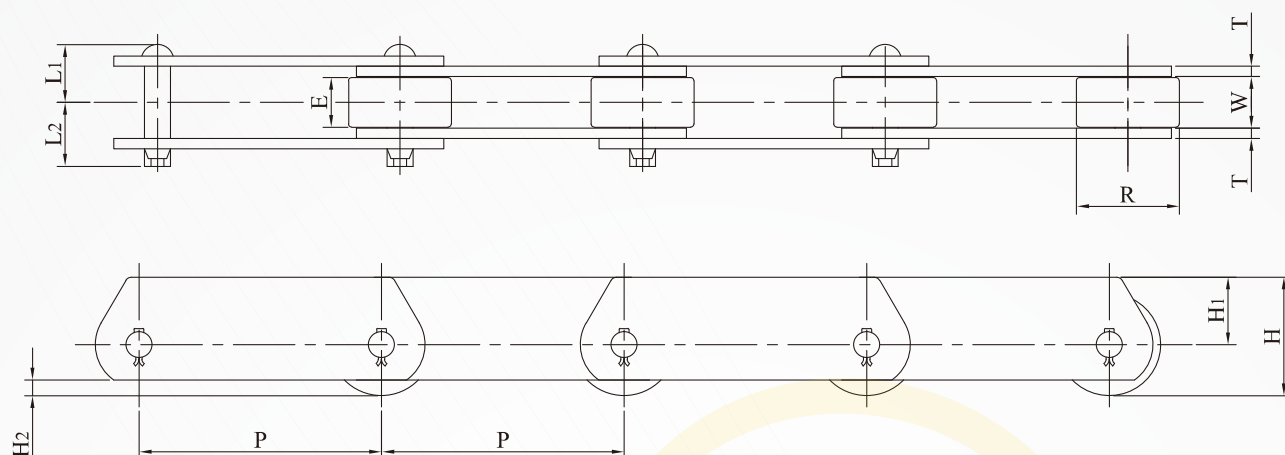

H：總高度
T：鏈片厚度

編號	節距	直徑	滾子寬	內節寬度	總高度	高		鏈片厚度	L1	L2	概重 (kgf/m)	平均斷裂強度	
						H1	H2					普通	強力
DLD03075R DLD03100R	75 100	31.8	15.5	16.1	36.9	21	4.9	3.2	18	20	3.2 2.8	3,000	7,100
DLD05100R DLD05150R	100 150	40	19	22	44	24	4	4.5	25	28.5	5.9 4.9	7,000	14,500
DLD08150R	150	44.5	23	27	50.3	28	8	6.3	31	34.5	7.0	8,000	14,500
DLD10150R DLD10200R	150 200	50.8	27	30	57.4	32	6.4	6.3	33	36	9.7 8.5	11,500	23,000
DLD 6205R	152.4	57.2	32	37.1	63.6	35	6.1	7.9	40.5	43	14.0	19,000	28,500
DLD12200R DLD12250R	200 250	65	32	37.1	73.5	41	10	7.9	40.5	43	14.9 13.5	19,000	28,500
DLD17250R DLD17300R	250 300	80	44	51.4	90	50	13.8	9.5	51.5	58	22.5 21.5	25,000	39,500
DLD26300R	300	85	50	57.2	95.5	53	10.5	9.5	55.5	61	24.3	32,000	53,000
DLD36300R DLD36400R	300 400	100	56	66.7	112	62	12	12.7	68	78	39.0 34.2	48,500	69,500
DLD52450R	450	110	56	77	125	70	17	16	82	90	46.0	51,000	105,000


重型偏位傳動鏈

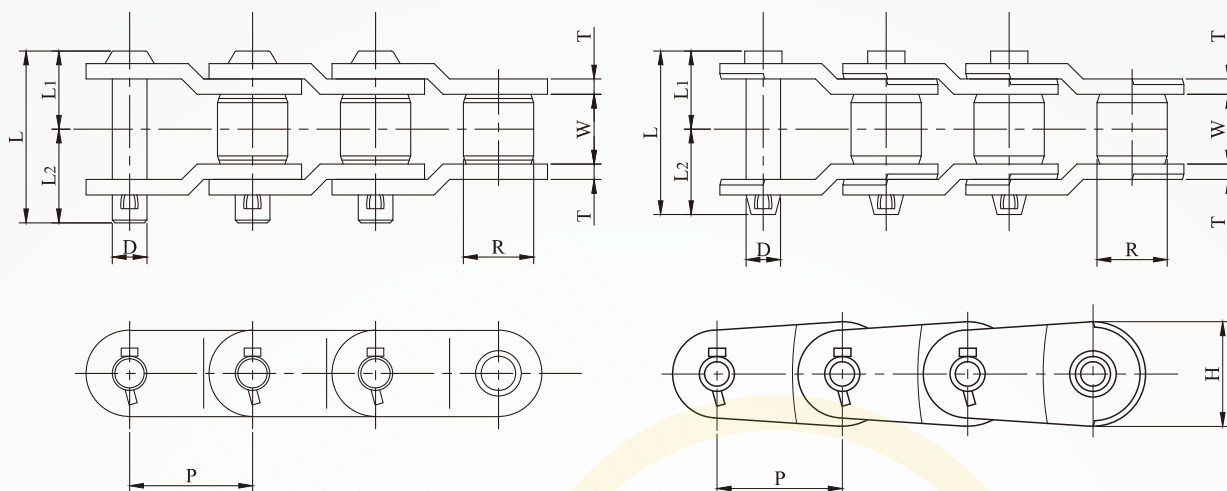


B 型

編號	形式	規格	節距	直徑	內節寬度	鏈片		梢				平均強度	概重
						T 厚度	H 頭寬	D	L	L1	L2		
RO 3140T	B	ANSI	44.45	25.4	25.4	5.6	43.2	12.51	62.5	28.45	34.05	25,400	7.7
RO 1613AK	B		50.8	28.58	31.5	8.1	42.9	15.06	78	36.2	41.8	31,750	11.3
RO 25H			63.5	31.75	38.1	9.5	41.5	15.88	92.5	43.05	49.45	39,700	13.7
RO 568			77.9	41.28	40.1	9.5	54	19.05	97	45.05	51.95	52,400	17.7
RO 2512			77.9	31.75	38.1	9.5	54	19.05	93.5	44.05	49.45	52,400	17
RO 3H		API	78.11	31.75	38.1	9.5	41.5	15.88	92.5	43.05	49.45	39,700	12.4
RO 3125		API	79.38	41.28	41.2	9.5	54	20.32	99.5	45.9	53.6	52,000	18.8
RO 1616		ANSI	88.9	44.45	38.6	12.7	54	22.23	117.7	51.6	60.1	63,500	23.9
RO 4HF		API	103.2	44.45	49.2	16	59	22.23	135.7	63.6	72.1	80,300	23.2
RO 4			103.2	44.45	49.1	12.7	54	22.23	122.2	56.85	65.35	63,500	21
RO 1245	B	ANSI	103.45	45.24	49.2	14.5	60	23.8	130	60.25	69.75	84,600	27.2
RO 635		ANSI	114.3	57.15	52.4	14.5	76	27.9	135.5	64.25	71.25	113,000	38.3
RO 1602AA		ANSI	127	63.5	70	16	90	31.75	161.2	77.05	84.15	156,000	52.3
RO 3180			57.15	35.72	36.4	7.2	54	17.46	81	37.3	43.7	36,300	14.3
RO 3			78.11	31.75	38.1	8	38	15.88	86.5	40.05	46.45	27,700	10.5
RO 1338			92.08	53.98	42.4	14.5	60	23.8	123.2	56.85	66.35	84,600	30
RO 1644A			95.25	44.45	38.1	14.5	60	23.8	118.9	54.7	64.2	84,600	29.3
RO 1664A			101.6	57.15	55.8	14	86	30.16	138	64.95	73.05	128,000	44.5
RO 1343			103.89	47.63	49.2	14.5	70	25.4	132	62.25	69.75	105,000	31.9
RO 1345			103.89	50.8	49.2	14.5	70	25.4	132	62.25	69.75	105,000	32.9
RO 1605AK	B		127	63.5	69.9	19	91	34.93	173.5	83.2	90.3	183,000	54.3
RO 3120T			38.1	22.23	25.4	4.8	34.4	11.11	57.5	26.8	30.7	16,100	6.4
RO 3140			44.45	25.4	25.4	5.6	43.2	12.15	62.6	28.55	34.05	24,000	7.7
RO 3160			50.8	28.58	31.75	6.4	49.2	13.73	72.3	33.4	38.9	30,600	10
RO 1625			63.5	39.69	38.9	8	60.3	19.8	89.7	41.4	48.3	43,000	16.3
RO 3924			99.21	57.15	38.4	14.3	82.6	30.16	121	56.85	64.15	121,000	45
RO 1654A			101.6	57.15	58.7	14.5	76.6	28.63	141.5	67.4	74.1	109,000	43.6
RO 5			103.2	44.45	38.6	12.7	54	22.23	111.7	51.6	60.1	63,500	19.9
RO 1346			107.95	50.8	49.2	14.5	60	25.4	132	62.25	69.75	81,400	34.1
RO 1634A			127	63.5	58.7	14.5	76	28.63	141.5	67.4	74.1	109,000	39.8
RO 1626A		ANSI	152.4	82.55	58.7	19	101.6	38.1	166.4	77.9	88.5	207,000	66.7
RO 6042			152.4	76.2	76.3	19	101.6	38.1	184	86.7	97.3	207,000	71.3

側置滾子輸送鏈條

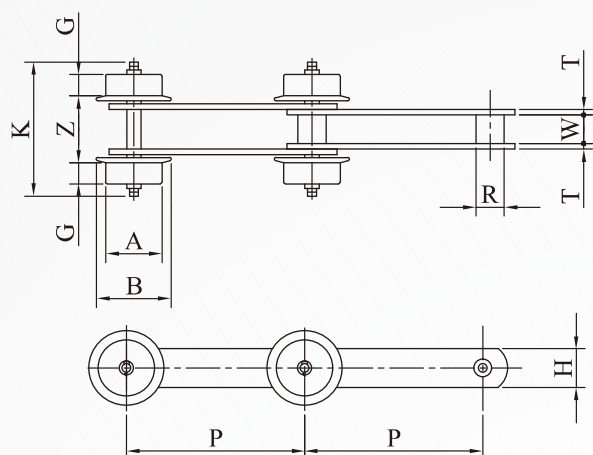


[側輪F]

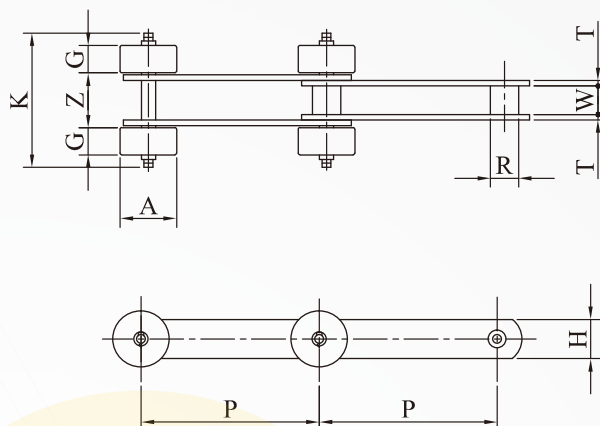


[側輪R]

特殊附屬配件示例




鏈條的導軌




軌道 軌距

倍速，累積機能示例




鏈條編號	節距	滾子直徑	內節寬度	金屬板		全寬	側輪F滾子				側輪R滾子			質量 兩側合計	SR容許負荷 (兩個合計) KN(kgf)	
				寬	厚度		A	B	G	Z	A	G	Z		SR 生	SR
DL03075S-SR DL03100S-SR	75 100	15.9	16.1	22	3.2	76	31.8	42	12	38	31.8	15.5	31	0.3	0.69(70)	1.08 (110)
DL 430S-SR	101.6	20.1	22.6	25.4	4.8	104	38.1	50	15	56.5	38.1	20	46.5	0.5	0.98(100)	1.57 (160)
DL05075S-SR DL051002-SR DL05125S-SR DL05150S-SR	75 100 125 150	22.2	22	32	4.5	102	40	50	14	55	40	19	46.5	0.5	1.17 (120)	1.96 (200)
DL 450S-SR	101.6	22.2	27	28.6	6.3	130	44.5	55	20	70.5	44.5	26	58.5	0.7	1.67 (170)	2.35 (240)
DL10100S-SR DL10125S-SR DL10150S-SR	100 125 150	29	30	38.1	6.3	136	50.8	65	20	73	50.8	26	61	1	1.96 (200)	3.24 (330)
DL 6205S-SR	152.4	34.9	37.1	44.5	7.9	167	57.2	70	25	90.5	57.2	32	76.5	1.3	2.75 (280)	4.61 (470)
DL12200S-SR DL12250S-SR	200 250	34.9	37.1	44.5	7.9	167	65	80	24	92.5	65	32	76.5	1.8	2.75 (280)	4.61 (470)
DL17200S-SR DL17250S-SR DL17300S-SR	200 250 300	40.1	51.4	50.8	9.5	189	65	80	24	112.5	65	32	96.5	3.8	3.14 (320)	5.3(540)
DL26200S-SR DL26250S-SR DL26300S-SR	200 250 300	44.5	57.2	63.5	9.5	230	80	100	34	124.5	80	44	104.5	6.9	4.9 (500)	8.43(860)
DL36250S-SR DL36300S-SR DL36450S-SR	250 300 450	50.8	66.7	76.2	12.7	268	100	125	38	150.5	100	50	126.5	11.7	6.57 (670)	11.1(1130)

FC型輸送鏈

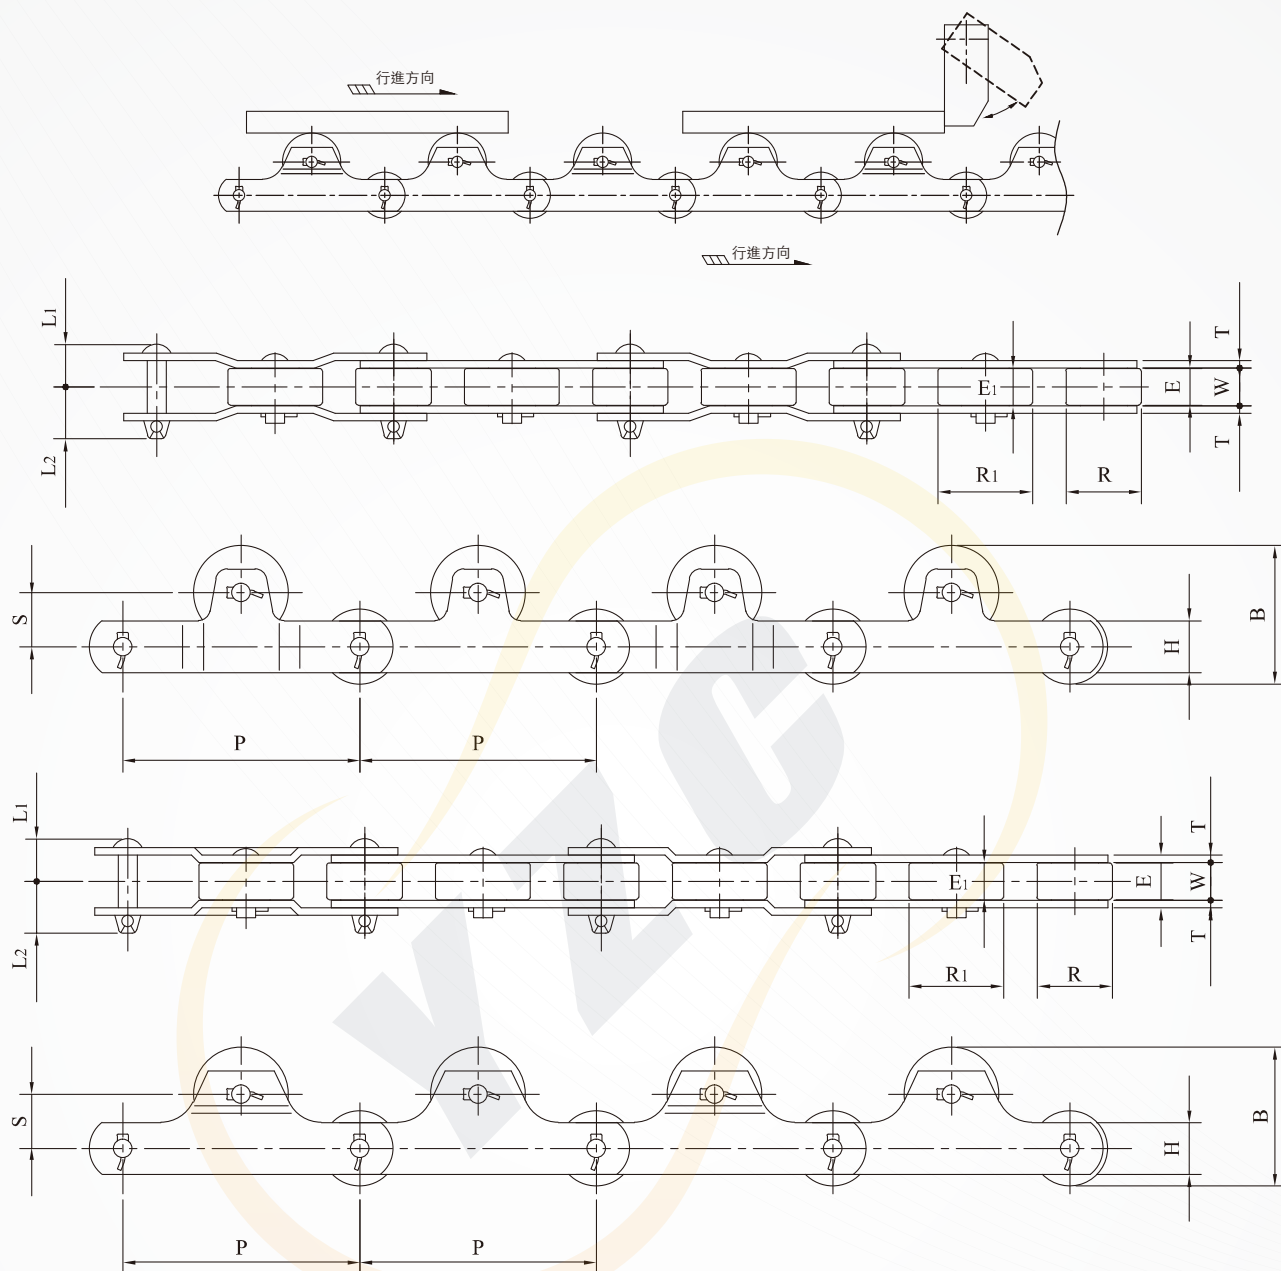

鏈條編號	節距 P	直徑 R	觸軌寬 E	內節 寬度 W	高度 H	厚度 T	L1	L2	S	R1	E1	B	概重 (kgf/m)	容許荷重 (kgf/1個)	
														原始 規格	焊硬 規格
DL03075R-TR DL03100R-TR	75 100	31.8	15.5	16.1	22	3.2	18	20	23.1	40	PL:20 RL:13	59	2.7 2.3	35	60
DL05100R-TR DL05150R-TR	100 150	40	19	22	32	4.5	25	28.5	30	40	19	70	5 4.1	65	105
DL05150R-TR	150	44.5	23	27	28.6	6.3	31	34.5	30	40	23	72.2	5.5	80	130
DL05150R-TR	150	50.8	27	30	38.1	6.3	33	36	30	50.8	27	80.8	7.9	115	195
DL 6205R-TR	152.4	57.2	32	37.1	44.5	7.9	40.5	43	37.8	57.2	32	95	12.1	150	255
DL12200R-TR	200	65	32	37.1	44.5	7.9	40.5	43	45	65	32	110	11.4	150	255
DL17200R-TR	200	80	44	51.4	50.8	9.5	51.5	58	65	80	44	145	19	250	420


雙翼用鏈條

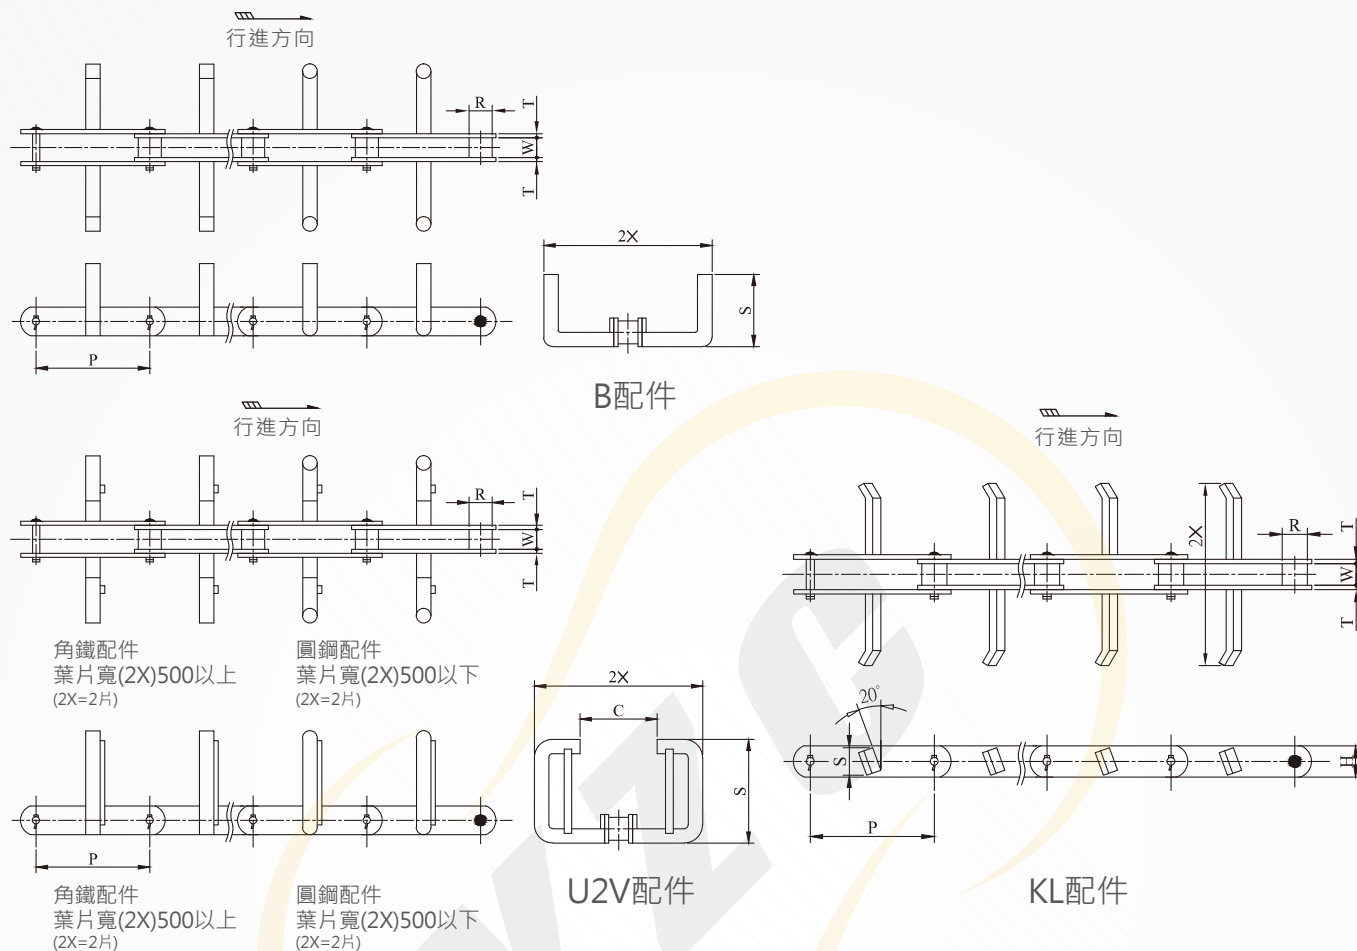

FC型 各部尺寸表


鏈條 編號	使用 配件 號碼	節距 P	滾子徑 R	內節 寬度 W	鏈片		B配件			U2V配件				L配件			KL配件			平均 抗拉 強度 (kg)
					高 H	厚 T	葉片 寬 2X	高 S	概重 kg/m	葉片 2X	高 S	C	概重 kg/m	葉片 寬 2X	高 S	概重 kg/m	葉片 寬 2X	高 S	概重 kg/m	
450W-M	FC150	101.6	25.4	27	31.8	6.3	135	55	7.4	135	80	60	9.1	135	28	6.5	135	28	6.5	8,500 (14,500)
08125W-M	FC200	125	25.4	27	31.8	6.3	185	80	8.2	185	115	85	10.1	185	28	6.5	185	28	6.5	8,500 (14,000)
10125-M	FC200	125	31.8	30	38.1	6.3	185	80	8.9	185	115	85	10.9	185	34	8.1	185	34	8.1	11,500 (23,000)
10150-M	FC270	150					250	100	9.8	250	140	105	12	250			250			
6205-M	FC270	152.4	38.1	37.1	44.5	7.9	250	100	14.4	250	140	105	18.5	250	40	12	250	40	12	19,000 (28,500)
12200-M	FC350	200	38.1	37.1	44.5	7.9	330	125	16.3	330	185	130	20	330	40	12	330	40	12	19,000 (28,500)
17200-M	FC350	200	44.5	51.4	50.8	9.5	330	125	18.7	330	185	130	23	330	46	17	330	46	17	25,000 (39,500)
17250-M	FC450	250					430	160	19.3	430	230	135	23.7	430			430			
26200-M	FC410	200					390	150	25	390	233	100	33.4	390		28	390		28	32,000 (53,000)
26250-N	FC450	250	50.8	57.2	63.5	9.5	430	160	25	430	230	135	29	430	58	23	430	58	23	30,500 (55,500)
26300-N	FC580	300					560	200	27	560	290	160	30.6	560		23	560		23	30,500 (55,000)
36300-M	FC580	300	57.2	66.7	76.2	12.7	560	200	37	560	290	160	40	560	70	34	560	70	34	48,500 (69,500)
36300-N	FC580	300																		51,000 (88,500)

NF形滑輪鏈條

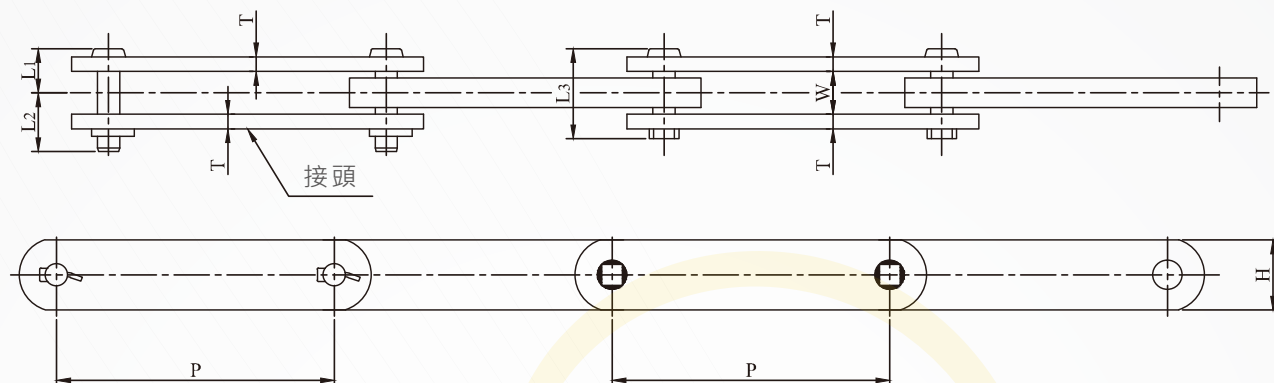


鏈條編號	節距 P	鏈片高 H	梢			外鏈片 厚度 T	內節 寬度 W	概重 (kg/m)	平均抗拉強度
			L1	L2	L3				
DL30150-NF DL30200-NF	150 200	38.1	24	32	49	7.9	23.3	7 6.6	309 (31500)
DL40150-NF DL40200-NF	150 200	44.5	25.5	33.5	52	7.9	26.5	9 8.5	397 (40500)
DL56200-NF DL56250-NF	250 300	54	29.5	40.5	60	9.5	29.5	12.3 12	554 (56500)
DL63200-NF DL63250-NF	250 300	57	30.5	41.5	62	9.5	31.5	13.7 13	618 (63000)
DL70200-NF DL70250-NF	250 300	63.5	31.5	42.5	64	9.5	33.5	16.2 15.5	721 (73500)
DL90200-NF DL90250-NF	250 300	72	34.5	45.5	70	10.5	38	21 20	907 (92500)
DL115250-NF DL115300-NF	250 300	76.2	38	49	77	12.7	40	25 24	1120 (114000)
DL140250-NF DL140300-NF	250 300	85	44	54	88	14	47.5	32 31	1400 (143000)
DL180300-NF DL180350-NF	300 350	95	38.5	58.5	97	16	52.5	39 37.8	1740 (177500)
DL210300-NF DL210350-NF	300 350	110	51.5	61.5	103	16	59	50 48.3	2150 (219500)
DL250300-NF DL250350-NF	300 350	112	58.5	68.5	117	19	66	58.8 56.7	2440 (248500)
DL280300-NF DL280350-NF	300 350	122	58.5	68.5	117	19	67	66 62.3	2720 (277500)

穀物專用輸送機用鏈條(FK形)

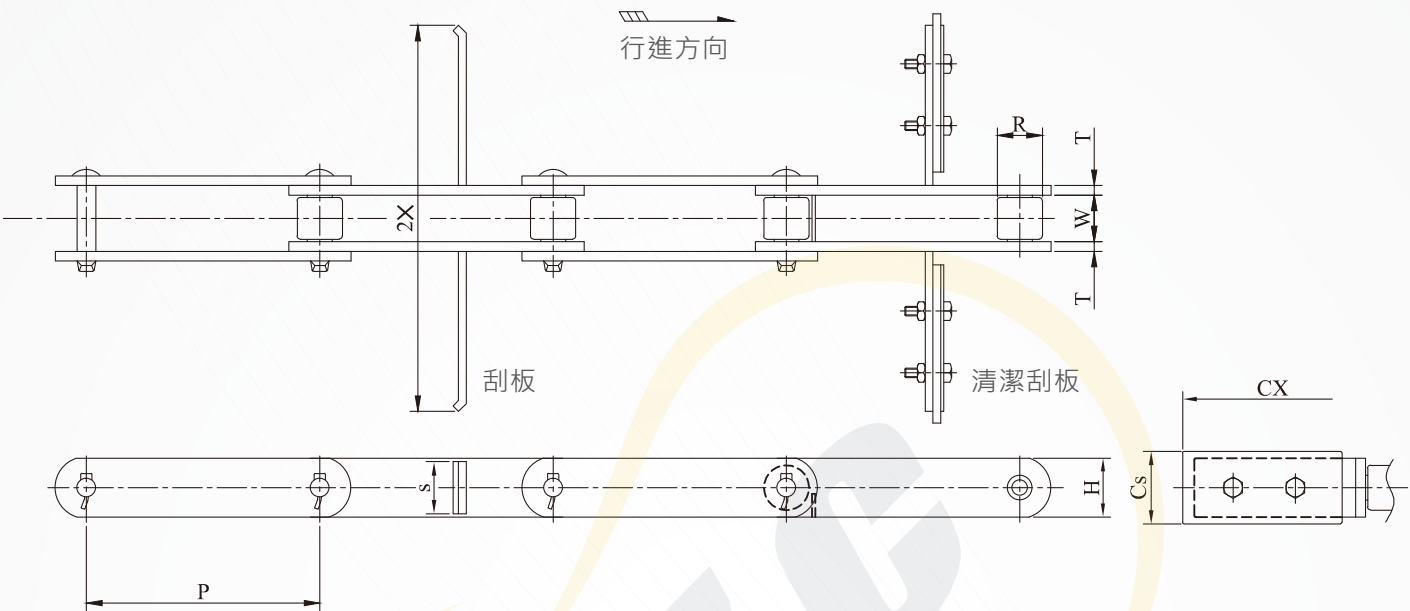

鏈條編號	使用 流式 號碼	節距 P	滾子 直徑 R	內節 寬度 W	鏈片		配件		清潔刮板		概重 (kgf/m)	平均抗拉強度 (kgf/m)
					寬 H	厚度 T	配件寬 2X	高度 S	寬 CX	高度 Cs		
DL 03075 S	FK 110	75	15.9	16.1	22	3.2	95	20	105	28	2.1	3,000
DL430 S	FK 150	101.6	20.1	22.6	25.4	4.8	135	22	145	32	3.4	5,500
DL450 S	FK 150	101.6	22.2	27	28.6	6.3	135	25	145	34	5	8,000
DL08125 S	FK 200	125	22.2	27	28.6	6.3	185	25	195	34	5	8,000
DL10125 S	FK 200	125	29	30	38.1	6.3	185	34	195	47	6.8	11,500
	FK 240						225		235		7.3	
DL10150 S	FK 270 FK 320	150	29	30	38.1	6.3	250 300	34	265 315	47	6.9 7.2	11,500
DL6205 S	FK 270	152.4	34.9	37.1	44.5	7.9	250	40	265	53	10.5	19,000
DL12200 S	FK 350	200	34.9	37.1	44.5	7.9	330	40	345	53	10.3	19,000
DL17200 S	FK 350 FK 450	200	40.1	51.4	50.8	9.5	330 430	46	345 445	58	14 16	25,000
DL26200 S	FK 450	200	44.5	57.2	50.8	9.5	430	58	445	68	21	32,000

鏈輪的軸向齒廓及參數 美規 ANSI標準

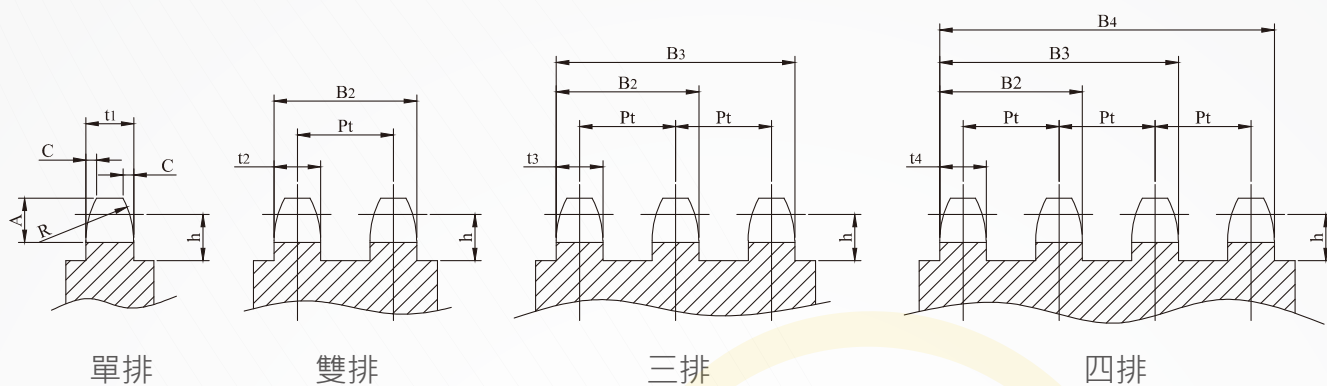

P：節距
R：倒角半徑
A：倒角高
C：倒角寬

Pt：排距
t1：單排齒厚
t2：雙排齒厚
t3：三排齒厚

t4：四排齒厚
B2：齒寬
B3：三排齒寬
B4：四排齒寬

單位：mm


鏈輪號	節距	滾子直徑	h	倒角高	倒角寬	倒角半徑	排距	單排	2排	3排	4排				
								齒厚 t ₁	齒厚 t ₂ , t ₃	齒寬		齒厚 t ₄	齒寬		
										B ₂	B ₃		B ₂	B ₃	B ₄
25	6.35	3.3	4	3.2	0.8	6.8	6.4	2.8	2.7	9.1	15.3	2.4	8.8	15.2	21.6
35	9.525	5.08	5	4.8	1.2	10.2	10.1	4.3	4.1	14.2	24.4	3.8	13.9	24	34.1
410	12.7	7.77	7	7	1.1	19.2	-	2.8	-	-	-	-	-	-	-
40	12.7	7.92	7	6.4	1.6	13.5	14.4	7.2	7	21.4	35.8	6.5	20.9	35.3	49.7
50	15.875	10.16	10.3	7.9	2	16.9	18.1	8.7	8.4	26.5	44.6	7.9	26	44.1	62.2
60	19.05	11.91	11.8	9.5	2.4	20.3	22.8	11.7	11.3	34.1	56.9	10.6	33.4	56.2	79
80	25.4	15.88	15.5	12.7	3.2	27	29.3	14.6	14.1	43.4	72.7	13.3	42.6	71.9	101.2
100	31.75	19.05	19.2	15.9	4	33.8	35.8	17.6	17	52.8	88.6	16	51.8	87.6	123.4
120	38.1	22.22	23	19.1	4.8	40.5	45.4	23.5	22.7	68.1	113.5	21.5	66.9	112.3	157.7
140	44.45	25.4	27	22.2	5.6	47.2	48.9	23.5	22.7	71.6	120.5	21.5	70.4	119.3	168.3
160	50.8	28.58	31.6	25.4	6.4	54	58.5	29.4	28.4	86.9	145.4	27	85.5	144	202.5
180	57.15	35.71	36.8	28.5	7.2	61	65.8	33.1	32	97.8	163.6	30.4	96.2	162	227.8
200	63.5	39.67	39.6	31.8	7.9	67.5	71.6	35.3	34.1	105.7	177.3	32.5	104.1	175.7	247.3
240	76.2	47.62	48.5	38.1	9.5	81	87.8	44.1	42.7	130.5	218.3	40.7	128.5	216.3	304.1

註：

1.h為節圓到凸台(或槽底)的最小距離

2.4排以上的鏈輪齒厚與4排鏈輪齒厚t4相同，齒幅為 $B_n = (n-1)Pt + t_4 (n \geq 4)$

鏈輪的軸向齒廓及參數 歐規 BS標準

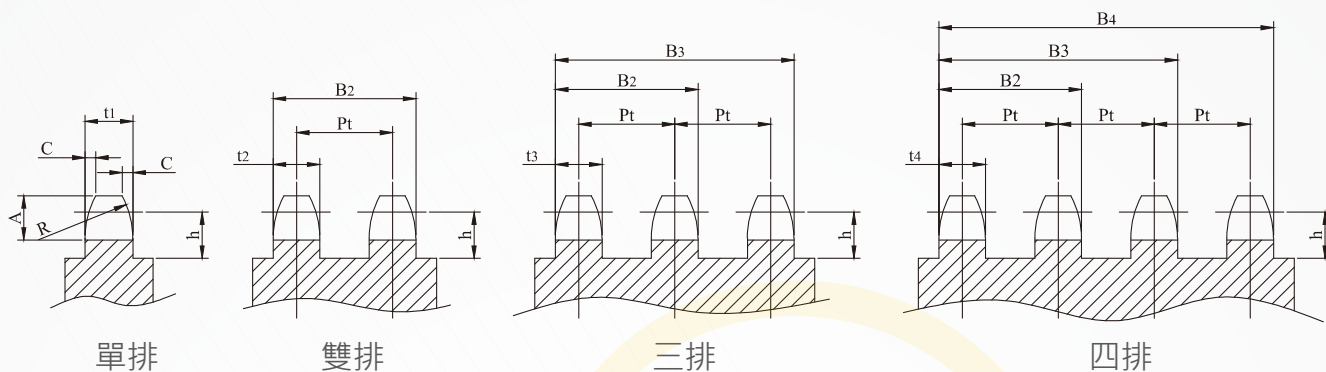

P : 節距
R : 倒角半徑
A : 倒角高
C : 倒角寬

Pt : 排距
t1 : 單排齒厚
t2 : 雙排齒厚
t3 : 三排齒厚

t4 : 四排齒厚
B2 : 齒寬
B3 : 三排齒寬
B4 : 四排齒寬

單位：mm


鏈輪號	節距	滾子直徑	h	倒角高	倒角寬	倒角半徑	排距	單排	2排		3排	4排			
								齒厚 t ₁	齒厚 t ₂ , t ₃	齒寬		齒厚 t ₄	齒寬		
										B ₂	B ₃		B ₂	B ₃	B ₄
04B	6	4	4.1	3	0.6	6		2.6	2.5			2.4			
05B	8	5	5.3	4	0.8	8	5.6	2.8	2.7	8.3	13.9	2.6	8.2	13.8	19.4
06B	9.525	6.35	6.2	4.8	1	10	10.2	5.3	5.2	15.4	25.6	5	15.2	25.4	35.6
08B	12.7	8.51	8.4	6.4	1.3	13	13.9	7.2	7	21	34.9	6.8	20.7	34.6	48.5
10B	15.875	10.16	10.2	7.9	1.6	16	16.6	9.1	9	25.6	42.2	9	25.6	42.2	58.8
12B	19.05	12.07	11.2	9.5	2	19	19.5	11.1	10.8	30.4	49.9	10.9	30.4	49.9	69.4
16B	25.4	15.88	14.6	12.7	2.5	26	31.9	16.2	15.8	47.7	79.6	15.8	47.7	79.6	111.5
20B	31.75	19.05	18	15.9	3.5	32	36.5	18.5	18.2	54.6	91	18.2	54.6	91	127.5
24B	38.1	25.4	22.4	19.1	4	38	48.4	24.1	23.6	72	120.3	23.6	72	120.3	168.7
28B	44.45	27.94	24.9	22.2	5	44	59.6	29.4	28.8	88.4	148	28.8	88.4	148	207.6
32B	50.8	29.21	28.2	25.4	6	51	58.6	29.4	28.8	87.4	146	28.8	87.4	146	204.6
40B	63.5	39.37	34.9	31.8	8	64	72.3	36.2	35.4	107.7	180	35.4	107.7	180	252.3
48B	76.2	48.26	41.8	38.1	9	76	91.2	43.3	42.5	133.7	224.9	42.5	133.7	224.9	316.1
56B	88.9	53.98	50.2	44.5	11	89	106.6	50.7	49.6	156.2	262.8	49.6	156.2	262.8	369.4
64B	101.6	63.5	57.8	50.8	13	102	119.9	57.9	56.7	176.6	296.5	56.7	176.6	296.5	416.4
72B	114.3	72.39	66	57.2	15	114	136.3	65.2	63.8	200.1	336.4	63.8	200.1	336.4	472.7

註：

1.h為節圓到凸台(或槽底)的最小距離

2. 4排以上的鏈輪齒厚與4排鏈輪齒厚t₄相同，齒幅為B_n=(n-1)Pt+t₄(n≥4)

美規標準鏈輪 NO.25 SPROCKETS 6.35Pitch

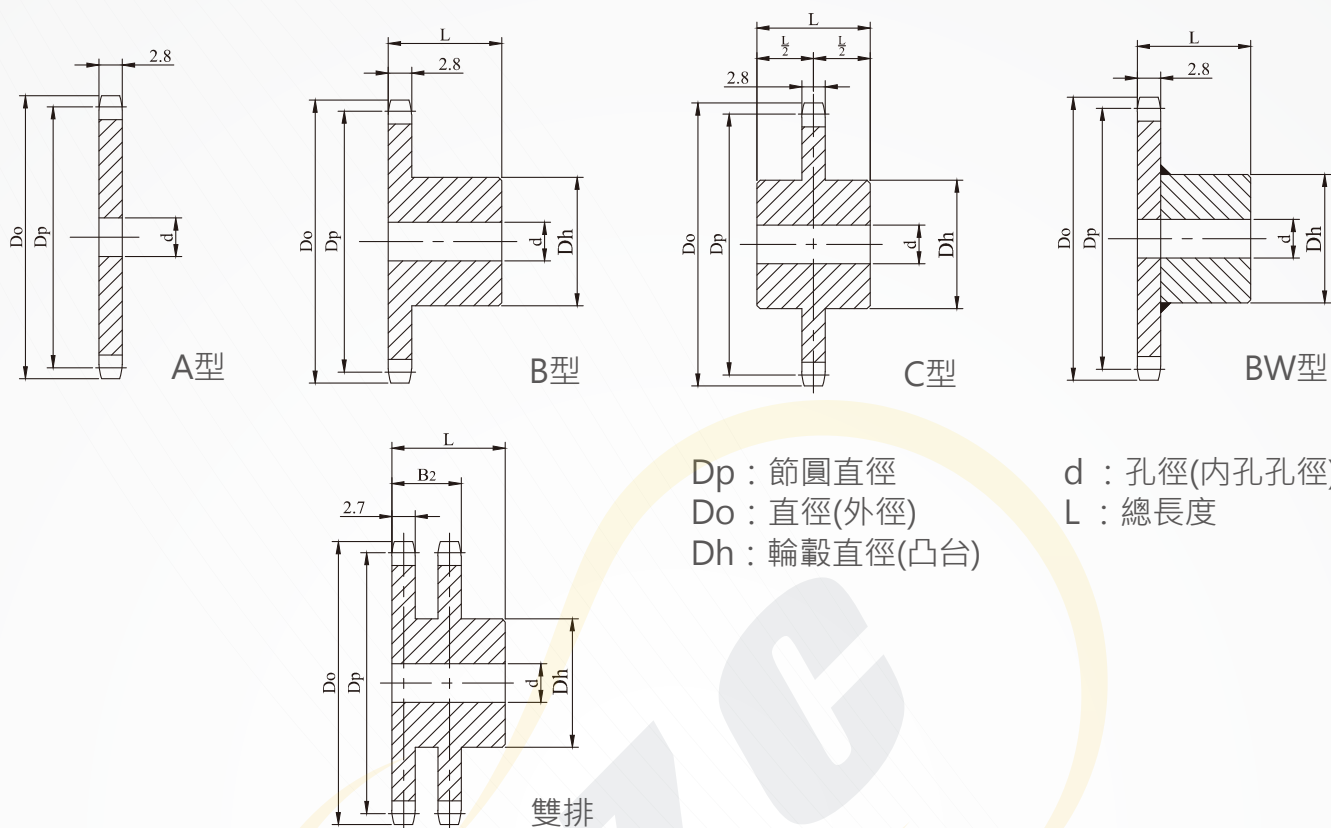

Single-Type B


材質：C45 單位：mm

齒數	外徑	節圓直徑	孔徑	凸台		概重 (kg)
				直徑	總長度	
10	23	20.55	6.5	14	15	0.03
11	25	22.54	6.5	15	15	0.03
12	28	24.53	7.5	15	15	0.03
13	30	26.53	7.5	18	15	0.05
14	32	28.54	7.5	20	15	0.05
15	34	30.54	7.5	20	15	0.05
16	36	32.55	9.5	25	15	0.06
17	38	34.56	9.5	25	15	0.07
18	40	36.57	9.5	25	15	0.07
19	42	38.58	9.5	28	15	0.08
20	44	40.59	9.5	28	15	0.08
21	46	42.61	9.5	28	15	0.09
22	48	44.62	9.5	30	15	0.1
23	50	46.63	9.5	30	15	0.11
24	52	48.65	9.5	30	15	0.12
25	54	50.66	9.5	35	15	0.14
26	56	52.68	9.5	35	15	0.14
27	58	54.7	9.5	35	15	0.15
28	60	56.71	9.5	35	15	0.15
29	62	58.73	9.5	35	15	0.16

齒數	外徑	節圓直徑	孔徑	凸台		概重 (kg)
				直徑	總長度	
30	64	60.75	9.5	35	15	0.16
31	66	62.77	10.5	40	20	0.2
32	68	64.78	10.5	40	20	0.2
33	70	66.8	10.5	40	20	0.21
34	72	68.82	10.5	40	20	0.21
35	74	70.84	10.5	40	20	0.21
36	76	72.86	10.5	40	20	0.22
37	78	74.88	10.5	40	20	0.26
38	80	76.9	10.5	40	20	0.26
39	82	78.91	10.5	40	20	0.27
40	84	80.93	10.5	40	20	0.27
41	87	82.95	10.5	50	20	0.32
42	89	84.97	10.5	50	20	0.32
43	91	86.99	10.5	50	20	0.4
44	93	89.01	10.5	50	20	0.41
45	95	91.03	10.5	50	20	0.41
48	101	97.09	10.5	50	20	0.43
50	105	101.13	10.5	50	20	0.46
54	113	109.21	10.5	50	20	0.47
60	125	121.33	10.5	50	20	0.52
65	135	131.43	11.5	50	30	0.72
70	145	141.54	11.5	50	30	0.77
75	155	151.64	11.5	50	30	0.82
80	165	161.74	11.5	50	30	0.88

註：
 節距 6.35mm
 內鏈節內寬 3.18mm
 滾子直徑 3.30mm

美規標準鏈輪 NO.35 SPROCKETS 9.525Pitch

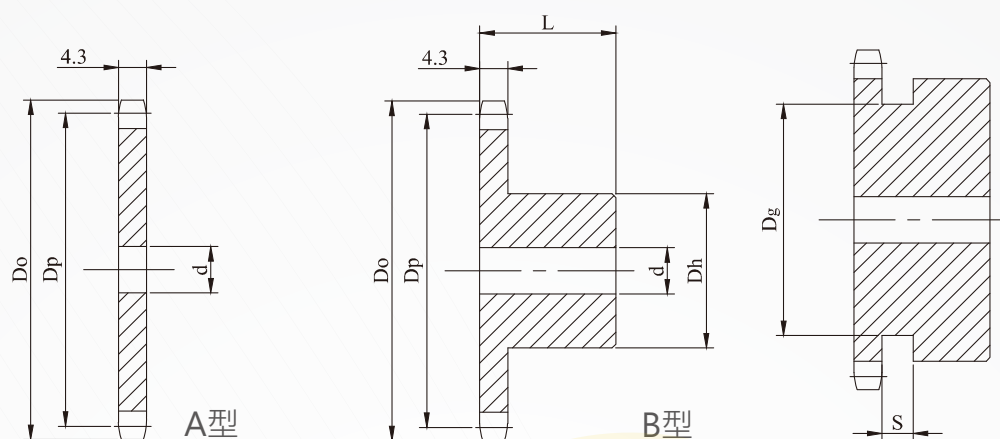

Dp : 節圓直徑
Do : 直徑(外徑)
Dh : 輪轂直徑(凸台)
Dg : 溝槽直徑
d : 孔徑(內孔孔徑)
S : 溝寬
L : 總長度

Single-Type B


材質 : C45 單位 : mm

齒數	外徑	節圓直徑	孔徑	凸台		概重 (kg)
				直徑	總長度	
8	29	24.89	8.5	18.5	20	0.06
9	32	27.85	8.5	21.5	20	0.06
10	34	30.82	8.5	24.5	20	0.08
11	38	33.81	9.5	27	20	0.09
12	41	36.8	9.5	30.5	20	0.12
13	44	39.8	9.5	32	20	0.12
14	47	42.81	9.5	32	20	0.12
15	51	45.81	9.5	35	20	0.16
16	54	48.82	9.5	37	20	0.19
17	57	51.84	11.5	41	20	0.22
18	60	54.85	11.5	44	20	0.25
19	63	57.87	11.5	47	20	0.28
20	66	60.89	11.5	50	20	0.32
21	69	63.91	11.5	53	20	0.36
22	72	66.93	11.5	56	20	0.37
23	75	69.95	11.5	60	20	0.38
24	78	72.97	11.5	53	22	0.43
25	81	76	11.5	53	22	0.44
26	84	79.02	11.5	53	22	0.45
27	87	82.05	11.5	53	22	0.46
28	90	85.07	11.5	53	22	0.48
29	93	88.1	11.5	53	22	0.49
30	96	91.12	11.5	53	22	0.51
31	99	94.15	11.5	53	22	0.53
32	102	97.18	11.5	53	22	0.54
33	105	100.2	11.5	53	22	0.56
34	109	103.23	11.5	53	22	0.57
35	112	106.26	11.5	53	22	0.59
36	115	109.29	12.5	53	22	0.61
37	118	112.31	12.5	63	25	0.8
38	121	115.34	12.5	63	25	0.82
39	124	118.37	12.5	63	25	0.84
40	127	121.4	12.5	63	25	0.85
41	130	124.43	16	63	25	0.91
42	133	127.46	16	63	25	0.93
43	136	130.49	16	63	25	0.95
44	139	133.52	16	63	25	0.97
45	142	136.55	16	63	25	1
46	145	139.58	16	63	25	1.01
47	148	142.61	16	63	25	1.03
48	151	145.64	16	63	25	1.05
50	157	151.7	16	63	25	1.07
53	166	160.78	16	63	25	1.09
54	169	163.81	16	63	25	1.1
55	172	166.85	16	63	25	1.25
60	187	182	16	63	25	1.3
64	200	194.12	16	63	25	1.46
65	203	197.15	16	68	25	1.67
70	218	212.3	16	68	25	1.8
75	233	227.46	16	68	25	1.9
80	248	242.61	16	68	25	2.4

齒數	S	Dg
8	4.4	14
9		17
10		20
11		23
12		26
13		29

註：
節距 9.525mm
內鏈節內寬 4.78mm
滾子直徑 5.08mm

美規標準鏈輪 NO.35 SPROCKETS 9.525Pitch

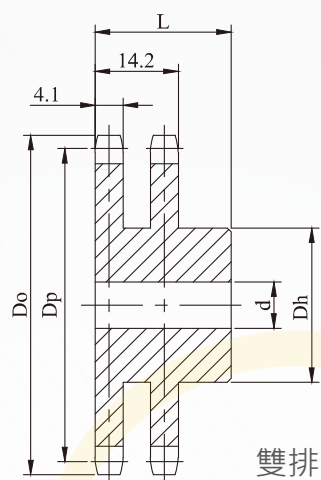

Dp : 節圓直徑
Do : 直徑(外徑)
Dh : 輪轂直徑(凸台)

d : 孔徑(內孔孔徑)
L : 總長度


Doble-Type B

材質 : C45 單位 : mm

齒數	外徑	節圓直徑	孔徑	凸台		概重 (kg)
				直徑	總長度	
10	34	30.82	9	20	30	0.1
11	38	33.81	10	23	30	0.11
12	41	36.8	10	26	30	0.14
13	44	39.8	10	27	30	0.17
14	47	42.8	10	32	30	0.21
15	51	45.81	10	35	30	0.25
16	54	48.82	10	38	30	0.29
17	57	51.84	11.5	41	30	0.34
18	60	54.85	11.5	44	35	0.45
19	63	57.87	11.5	47	35	0.51
20	66	60.89	12	50	40	0.64
21	69	63.91	12	50	40	0.64
22	72	66.93	12	55	40	0.67
24	78	72.97	15	60	40	0.82
25	81	76	15	60	40	0.92
28	90	85.07	15	65	45	1.26
30	96	91.12	15	65	45	1.34
32	102	97.18	15	65	45	1.43
40	127	121.4	15	65	45	2.3
45	142	136.55	19	83	45	2.84
50	157	151.7	19	83	45	3.22
60	187	182	19	93	50	4.7

註：
節距 9.525mm
內鏈節內寬 4.78mm
滾子直徑 5.08mm

美規標準鏈輪 NO.40 SPROCKETS 12.7Pitch

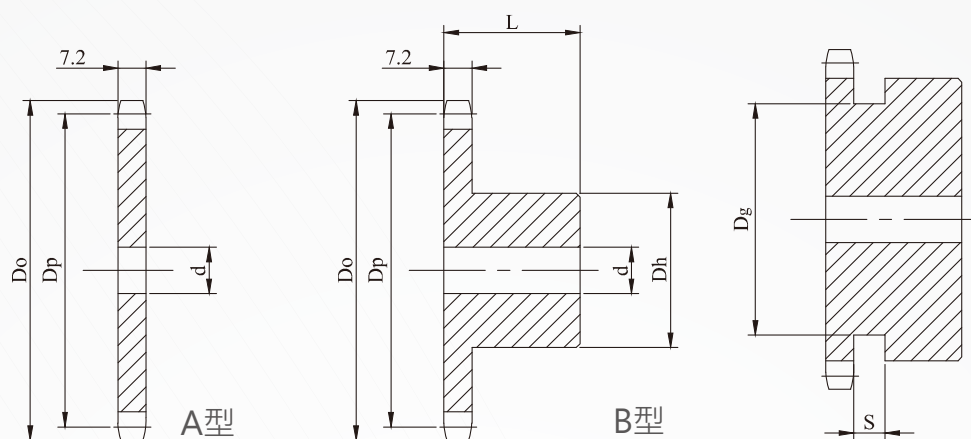

Dp : 節圓直徑
Do : 直徑(外徑)
Dh : 輪轂直徑(凸台)
Dg : 溝槽直徑
d : 孔徑(內孔孔徑)
L : 總長度
S : 溝寬


齒數	外徑	節圓直徑	孔徑	凸台		概重(kg)
				直徑	總長度	
8	38	33.19	8.5	24	22	0.1
9	42	37.13	8.5	28	22	0.11
10	46	41.1	9.5	32	22	0.14
11	51	45.08	10.5	36	22	0.19
12	55	49.07	11.5	40	22	0.22
13	59	53.07	13.5	37	22	0.23
14	63	57.07	13.5	42	22	0.28
15	67	61.08	13.5	46	22	0.34
16	71	65.1	13.5	50	22	0.4
17	76	69.12	13.5	54	22	0.46
18	80	73.14	13.5	57	22	0.51
19	84	77.16	13.5	62	22	0.59
20	88	81.18	14	67	25	0.76
21	92	85.21	14	71	25	0.85
22	96	89.24	14	75	25	0.95
23	100	93.27	14	77	25	1
24	104	97.3	14	63	25	0.84
25	108	101.33	14	63	25	0.88
26	112	105.36	13	63	25	0.92
27	116	109.4	13	63	25	0.96
28	120	113.43	13	63	25	1
29	124	117.46	13	63	25	1
30	128	121.5	13	63	25	1.1
31	133	125.53	14	68	28	1.2
32	137	129.57	14	68	28	1.3
33	141	133.61	14	68	28	1.3
34	145	137.64	14	68	28	1.3
35	149	141.68	14	68	28	1.4
36	153	145.72	16	68	28	1.5
37	157	149.75	16	68	28	1.55

齒數	外徑	節圓直徑	孔徑	凸台		概重(kg)
				直徑	總長度	
38	161	153.79	16	68	28	1.6
39	165	157.83	16	68	28	1.65
40	169	161.87	16	68	28	1.7
41	173	165.91	16	73	32	2
42	177	169.95	16	73	32	2.05
43	181	173.98	16	73	32	2.1
44	185	178.02	16	73	32	2.17
45	189	182.06	16	73	32	2.25
46	193	186.1	16	73	32	2.3
47	197	190.14	16	73	32	2.37
48	201	194.18	16	73	32	2.45
49	205	198.22	16	73	32	2.51
50	209	202.26	16	73	32	2.6
51	214	206.3	16	73	32	2.65
52	218	210.34	16	73	32	2.72
53	222	214.38	16	73	32	2.8
54	226	218.42	16	73	32	2.9
55	230	222.46	16	73	32	2.96
56	234	226.5	16	73	32	3.04
60	250	242.66	16	73	32	3.4
64	266	258.83	16	73	32	3.73
65	270	262.87	16	83	32	4.1
68	282	274.99	16	83	32	4.35
70	290	283.07	16	83	32	4.57
72	299	291.16	20	83	32	4.8
75	311	303.28	20	83	32	5.1
80	331	323.49	20	88	35	5.9
85	351	343.69	20	88	35	6.5
90	371	363.9	20	88	35	7.15

齒數	S	Dg
8	5.2	18
9		23
10		27
11		31
12		35

註：
節距 12.7mm
內鏈節內寬 7.95mm
滾子直徑 7.95mm

美規標準鏈輪 NO.40 SPROCKETS 12.7Pitch

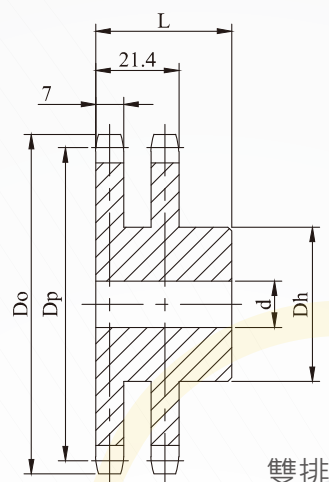

雙排

Dp : 節圓直徑
Do : 直徑(外徑)
Dh : 輪轂直徑(凸台)

d : 孔徑(內孔孔徑)
L : 總長度


Doble-Type B

材質 : C45 單位 : mm

齒數	外徑	節圓直徑	孔徑	凸台		概重 (kg)	齒數	外徑	節圓直徑	孔徑	凸台		概重 (kg)
				直徑	總長度						直徑	總長度	
10	46	41.1	13	28	35	0.28	30	128	121.5	18	100	40	2.8
11	51	45.08	13	30	35	0.3	31	133	125.53	23	100	50	2.95
12	55	49.07	14	35	35	0.34	32	137	129.57	23	100	50	3.05
13	59	53.07	14	39	35	0.4	33	141	133.61	23	100	50	3.06
14	63	57.07	14	43	35	0.47	34	145	137.64	23	100	50	3.08
15	67	61.08	14	47	35	0.55	35	149	141.68	23	100	50	3.1
16	71	65.1	14	50	35	0.65	36	153	145.72	23	100	50	3.3
17	76	69.12	14	54	35	0.75	37	157	149.75	23	100	50	3.4
18	80	73.14	14	59	35	0.85	38	161	153.79	23	100	50	3.5
19	84	77.16	14	63	35	0.98	40	169	161.87	23	100	50	3.6
20	88	81.18	14	67	40	1.3	42	177	169.95	23	93	50	4
21	92	85.21	14	68	40	1.3	45	189	182.06	23	93	50	4.6
22	96	89.24	14	72	40	1.5	48	201	194.18	23	93	50	5
23	100	93.27	14	76	40	1.6	50	209	202.26	23	93	50	5.5
24	104	97.3	14	80	40	1.8	54	226	218.42	23	93	50	5.8
25	108	101.33	18	84	40	2	60	250	242.66	23	93	50	6.7
26	112	105.36	18	88	40	2.2	65	270	262.87	23	93	50	10.2
27	116	109.4	18	92	40	2.3	70	290	283.07	23	93	50	11.5
28	120	113.43	18	96	40	2.5							
29	124	117.46	18	96	40	2.65							

註：
節距 12.7mm
內鏈節內寬 7.95mm
滾子直徑 7.95mm

美規標準鏈輪 NO.50 SPROCKETS 15.875Pitch

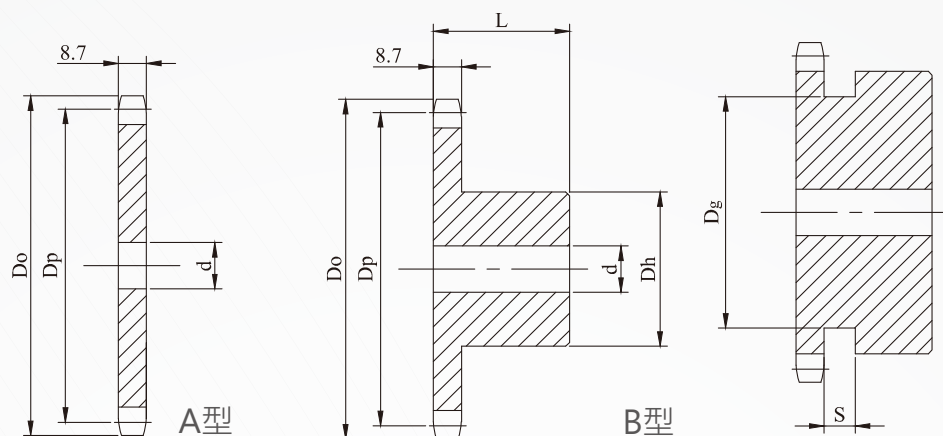

Dp : 節圓直徑
Do : 直徑(外徑)
Dh : 輪轂直徑(凸台)

Dg : 溝槽直徑
d : 孔徑(內孔孔徑)
S : 溝寬

L : 總長度

Single-Type B

材質 : C45 單位 : mm


齒數	外徑	節圓直徑	孔徑	凸台		概重 (kg)
				直徑	總長度	
8	48	41.48	11.5	30	25	0.12
9	53	46.42	11.5	34	25	0.2
10	58	51.37	14.5	40	25	0.27
11	64	56.35	14.5	45.5	25	0.33
12	69	61.34	14.5	50	25	0.41
13	74	66.34	14.5	51	25	0.46
14	79	71.34	14.5	52	25	0.52
15	84	76.35	14.5	57	25	0.62
16	89	81.37	14	62	25	0.72
17	94	86.39	14	67	25	0.83
18	100	91.42	14	72	28	1
19	105	96.45	14	73	28	1.1
20	110	101.48	14	73	28	1.2
21	115	106.51	14	73	28	1.2
22	120	111.55	16	73	28	1.3
23	125	116.58	16	73	28	1.3
24	130	121.62	16	73	28	1.4
25	135	126.66	16	73	28	1.5
26	140	131.7	16	73	28	1.5
27	145	136.74	16	73	28	1.5
28	150	141.79	16	73	28	1.6
29	155	146.83	16	73	28	1.7
30	161	151.87	16	73	28	1.8
31	166	156.92	16	73	28	1.85
32	171	161.96	16	73	28	1.9
33	176	167.01	16	73	28	2
34	181	172.05	16	73	28	2.1
35	186	177.1	16	73	28	2.2
36	191	182.14	16	83	35	2.85
37	196	187.19	16	83	35	2.95

齒數	外徑	節圓直徑	孔徑	凸台		概重 (kg)
				直徑	總長度	
38	201	192.24	16	83	35	3.05
39	206	197.29	16	83	35	3.15
40	211	202.33	16	83	35	3.25
41	216	207.38	16	83	35	3.4
42	221	212.43	16	83	35	3.5
43	226	217.48	16	83	35	3.6
44	231	222.53	16	83	35	3.7
45	237	227.58	16	83	35	3.85
46	242	232.63	16	83	35	3.96
47	247	237.68	16	83	35	4.09
48	252	242.73	16	83	35	4.2
49	257	247.78	16	83	35	4.35
50	262	252.83	16	83	35	4.5
51	267	257.88	16	83	35	4.62
52	272	262.92	16	83	35	4.76
53	277	267.97	16	83	35	4.91
54	282	273.02	16	83	35	5.05
55	287	278.08	16	83	35	5.2
56	292	283.13	16	83	35	5.36
57	297	288.18	16	83	35	5.51
58	302	293.23	16	83	35	5.67
60	312	303.33	16	83	35	6
65	338	328.58	20	93	40	7.4
68	353	343.74	20	93	40	7.94
70	363	353.84	20	93	40	8.3
75	388	379.1	20	93	40	9.35
80	414	404.36	20	98	45	10.5
85	439	429.62	20	98	45	12
90	464	454.88	20	98	45	13.2

齒數	S	Dg
8	6.4	22
9		29
10		34
11		39
12		44
13		49

註：
節距 15.875mm
內鏈節內寬 9.53mm
滾子直徑 10.16mm

美規標準鏈輪 NO.50 SPROCKETS 15.875Pitch

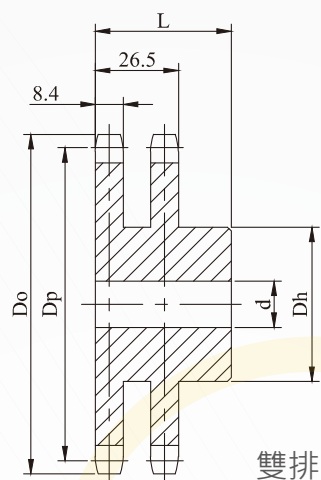

Dp : 節圓直徑
Do : 直徑(外徑)
Dh : 輪轂直徑(凸台)
d : 孔徑(內孔孔徑)
L : 總長度


Double-Type B

材質 : C45 單位 : mm

齒數	外徑	節圓直徑	孔徑	凸台		概重 (kg)	齒數	外徑	節圓直徑	孔徑	凸台		概重 (kg)
				直徑	總長度						直徑	總長度	
10	58	51.37	14	35	40	0.5	30	161	151.87	18	120	50	5.8
11	64	56.35	14	40	40	0.5	31	166	156.92	23	120	50	5.9
12	69	61.34	14	42	40	0.62	32	171	161.96	23	120	50	6
13	74	66.34	14	49	40	0.75	33	176	167.01	23	120	50	6.5
14	79	71.34	14	54	40	0.9	34	181	172.05	23	120	50	6.8
15	84	76.35	14	59	40	1.1	35	186	177.1	23	117	50	7
16	89	81.37	14	64	45	1.4	36	191	182.14	23	117	50	7
17	94	86.39	14	68	45	1.6	38	201	192.24	23	117	50	8
18	100	91.42	14	74	45	1.8	40	211	202.33	23	117	56	9
19	105	96.45	14	79	45	2.1	42	221	212.43	23	98	56	8.88
20	110	101.48	18	84	45	2.3	45	237	227.58	23	98	56	9.96
21	115	106.51	18	89	45	2.6	48	252	242.73	23	98	56	8
22	120	111.55	18	94	50	3	50	262	252.83	23	98	56	9
23	125	116.58	18	99	50	3.5	54	282	273.02	23	98	63	9.9
24	130	121.62	18	105	50	3.8	60	312	303.33	23	98	63	11.7
25	135	126.66	18	105	50	4.2	65	338	328.58	23	98	63	13
26	140	131.7	18	105	50	4.5	70	363	353.84	23	98	63	15
27	145	136.74	18	105	50	4.8							
28	150	141.79	18	110	50	5.1							
29	155	146.83	18	110	50	5.5							

註：
節距 15.875mm
內鏈節內寬 9.53mm
滾子直徑 10.16mm

美規標準鏈輪 NO.60 SPROCKETS 19.05Pitch

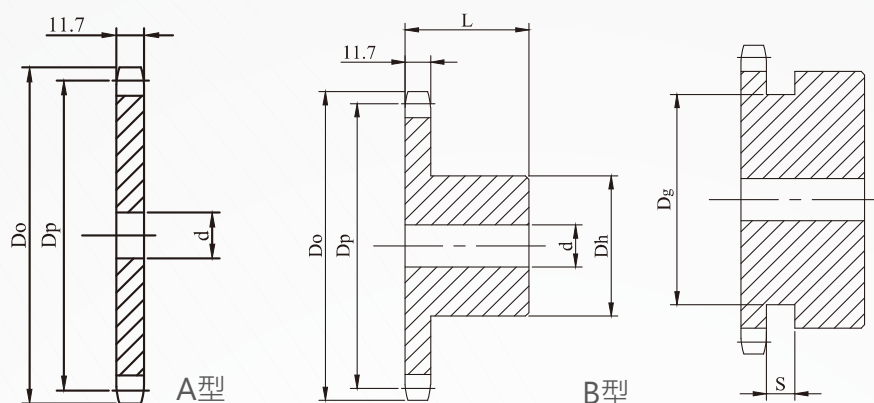

Dp : 節圓直徑

Do : 直徑(外徑)

Dh : 輪轂直徑(凸台)

Dg : 溝槽直徑

d : 孔徑(內孔孔徑)

S : 溝寬

L : 總長度

Single-Type B

材質 : C45 單位 : mm


齒數	外徑	節圓直徑	孔徑	凸台		概重(kg)
				直徑	總長度	
8	57	49.78	11.5	34	32	0.3
9	63	55.7	11.5	43	32	0.4
10	68	61.65	14.5	49	32	0.49
11	76	67.62	14.5	51	32	0.6
12	83	73.6	14.5	51	32	0.69
13	89	79.6	14	57	32	0.81
14	95	85.61	16	62	32	0.96
15	101	91.62	16	68	32	1.1
16	107	97.65	16	73	32	1.3
17	113	103.67	16	73	32	1.4
18	119	109.71	16	83	40	2
19	126	115.74	16	83	40	2.1
20	132	121.78	16	83	40	2.2
21	138	127.82	16	83	40	2.3
22	144	133.86	16	83	40	2.5
23	150	139.9	16	83	40	2.5
24	156	145.95	16	83	40	2.6
25	162	151.99	16	83	40	2.7
26	168	158.04	16	83	40	2.9
27	174	164.09	20	83	40	3
28	180	170.14	20	83	40	3.1
29	187	176.2	20	83	40	3.3
30	193	182.25	20	83	40	3.4
31	199	188.3	20	83	40	3.64
32	205	194.35	20	83	40	3.8
33	211	200.41	20	83	40	4
34	217	206.46	20	83	40	4.15
35	223	212.52	20	83	40	4.33
36	229	218.57	20	83	40	4.52
37	235	224.63	20	83	40	4.7
38	241	230.69	20	83	40	4.9
39	247	236.74	20	83	40	5.1
40	253	242.8	20	83	40	5.3
41	260	248.86	20	93	45	6
42	266	254.92	20	93	45	6.4
43	272	260.98	20	93	45	6.6
44	278	267.03	20	93	45	6.88
45	284	273.09	20	93	45	7.1
46	290	279.15	20	93	45	7.28
47	296	285.21	20	93	45	7.53
48	302	291.27	20	93	45	7.85
49	308	297.33	20	93	45	8.04
50	314	303.39	20	93	45	8.4
51	320	309.45	20	93	45	8.57
52	326	315.51	20	93	45	8.84
54	338	327.63	20	93	45	9.5
55	345	333.69	20	93	45	9.69
56	351	339.75	20	93	45	9.99
58	363	351.87	20	93	45	10.59
60	375	363.99	20	93	45	11.3
64	399	388.24	20	93	45	12.5
65	405	394.3	26	107	45	13.5
70	436	424.61	26	107	45	15.3
75	466	454.92	26	107	45	17.2
80	496	485.23	26	117	50	20
85	527	515.54	26	117	50	22.3
90	557	545.85	26	117	50	24.6

註：
節距
內鏈節內寬
滾子直徑

19.05mm
12.70mm
11.91mm

齒數	S	Dg
8	8	26
9		32
10		37
11		45

美規標準鏈輪 NO.60 SPROCKETS 19.05Pitch

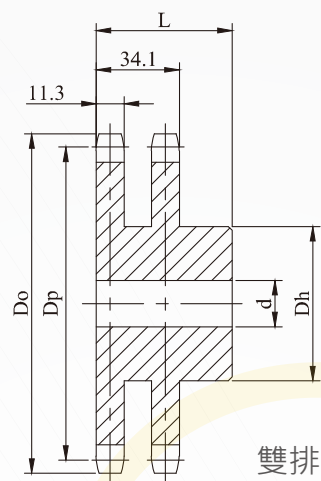

雙排

Dp : 節圓直徑
Do : 直徑(外徑)
Dh : 輪轂直徑(凸台)

d : 孔徑(內孔孔徑)
L : 總長度


Double-Type B

材質 : C45 單位 : mm

齒數	外徑	節圓直徑	孔徑	凸台		概重(kg)
				直徑	總長度	
10	68	61.65	16	35	50	0.9
11	76	67.62	16	44	50	1
12	83	73.6	16	50	50	1.2
13	89	79.6	18	57	50	1.4
14	95	85.61	18	64	56	1.8
15	101	91.62	18	70	56	2.1
16	107	97.65	18	76	56	2.5
17	113	103.67	18	82	56	2.6
18	119	109.71	18	88	56	3.2
19	126	115.74	18	94	56	3.7
20	132	121.78	23	100	56	4.2
21	138	127.82	23	100	56	4.4
22	144	133.86	23	100	56	4.9
23	150	139.9	23	100	56	4.7
24	156	145.95	23	120	56	6
25	162	151.99	23	120	56	6.4
26	168	158.04	23	120	56	6.8
27	174	164.09	23	120	56	7.3
28	180	170.14	23	120	56	7.8
29	187	176.2	28	120	56	8.2
30	193	182.25	28	130	56	9
31	199	188.3	28	130	56	9.3
32	205	194.35	28	127	56	9.5
33	211	200.41	28	127	56	9.7
34	217	206.46	28	127	56	10.5
35	223	212.52	28	127	56	11
36	229	218.57	28	98	56	8.5
38	241	230.69	28	98	56	9
40	253	242.8	28	98	56	9.7
42	266	254.92	28	107	56	11
45	284	273.09	28	107	71	12.8
48	302	219.27	28	107	71	14
50	314	303.39	28	107	71	16
54	338	327.63	28	107	71	18
60	375	363.99	28	107	71	21.5
65	405	394.3	28	107	71	24
70	436	424.61	28	107	71	30

註：
節距 19.05mm
內鏈節內寬 12.70mm
滾子直徑 11.91mm

美規標準鏈輪 NO.80 SPROCKETS 25.4Pitch

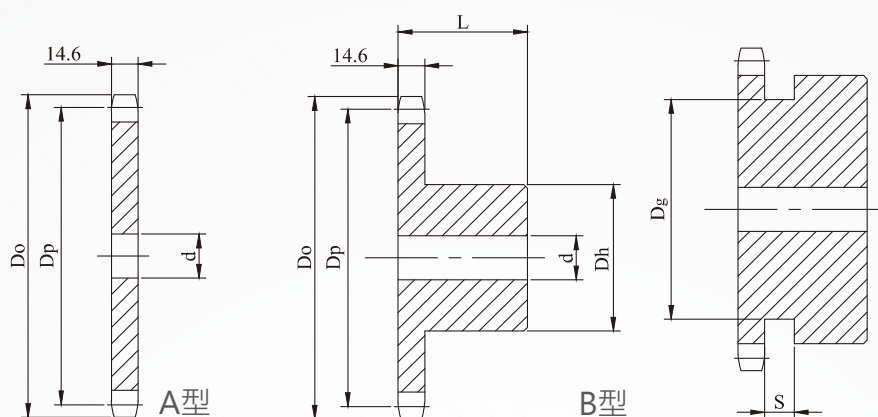

Dp：節圓直徑

Do：直徑(外徑)

Dh：輪轂直徑(凸台)

Dg：溝槽直徑

d：孔徑(內孔孔徑)

S：溝寬

L：總長度

Single-Type B

材質：C45 單位：mm

齒數	外徑	節圓直徑	孔徑	凸台		概重(kg)
				直徑	總長度	
8	77	66.37	16	49	40	0.7
9	85	74.27	16	58	40	0.87
10	93	82.19	16	52	40	1.02
11	102	90.16	16	60	40	1.25
12	110	98.14	16	67	40	1.6
13	118	106.14	16	77	40	1.9
14	127	114.15	16	77	40	2.15
15	135	122.17	20	93	40	2.3
16	143	130.2	20	93	40	2.5
17	151	138.23	20	93	40	2.95
18	159	146.27	20	93	40	3.15
19	167	154.32	20	93	40	3.4
20	176	162.37	20	93	40	3.6
21	184	170.42	20	93	40	3.85
22	192	178.48	26	107	45	5
23	200	186.54	26	107	45	5.23
24	208	194.6	26	107	45	5.5
25	216	202.66	26	107	45	5.8
26	224	210.72	26	107	45	6.1
27	233	218.79	26	107	45	6.4
28	241	226.86	26	107	45	6.75
29	249	234.93	26	107	45	7.1
30	257	243	26	107	45	7.4
31	265	251.07	26	107	45	7.8
32	273	259.14	26	107	45	8.15


齒數	S	Dg
8	10.4	35
9		44

齒數	外徑	節圓直徑	孔徑	凸台		概重(kg)
				直徑	總長度	
33	281	267.21	26	107	45	8.5
34	289	275.29	26	107	45	8.9
35	297	283.36	26	107	45	9.3
36	306	291.43	26	117	50	10.6
37	314	299.51	26	117	50	11
38	322	307.58	26	117	50	11.4
39	330	315.66	26	117	50	11.9
40	338	323.74	26	117	50	12.4
41	346	331.81	26	117	50	12.8
42	354	339.89	26	117	50	13.3
43	362	347.97	26	117	50	13.8
44	370	356.04	26	117	50	14.3
45	378	364.12	26	117	50	14.9
46	387	372.2	26	117	50	15.3
47	395	380.28	26	117	50	15.7
48	403	388.36	26	117	50	15.8
50	419	404.52	26	117	50	17.65
52	435	420.68	26	117	50	18.7
53	443	428.76	26	117	50	19.3
54	451	436.84	26	117	50	20
55	459	444.92	26	117	50	20.6
56	468	453	26	117	50	21.3
58	484	469.16	26	117	50	22.55
60	500	485.33	26	117	50	23.1
65	540	525.73	26	127	63	29.4
70	581	566.15	26	127	63	32.1
75	621	606.56	26	127	63	36.2
80	662	646.97	26	137	71	42.9
90	743	727.8	26	137	71	53

註：
節距
內鏈節內寬
滾子直徑

25.4mm
15.88mm
15.88mm

美規標準鏈輪 NO.80 SPROCKETS 25.4Pitch

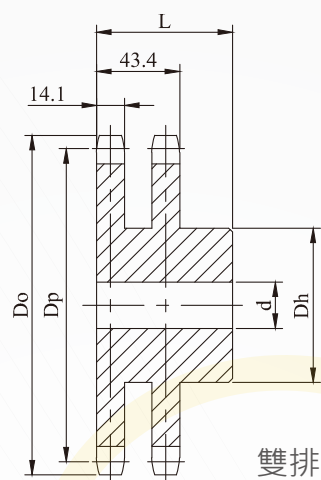

Dp : 節圓直徑
Do : 直徑(外徑)
Dh : 輪轂直徑(凸台)

d : 孔徑(內孔孔徑)
L : 總長度


Double-Type B

材質 : C45 單位 : mm

齒數	外徑	節圓直徑	孔徑	凸台		概重 (kg)	齒數	外徑	節圓直徑	孔徑	凸台		概重 (kg)
				直徑	總長度						直徑	總長度	
10	93	82.19	21	58	63	2	35	297	283.36	33	117	80	23.9
11	102	90.16	21	60	63	2.5	36	306	291.43	33	117	80	25.1
12	110	98.14	23	69	63	2.7	38	322	307.58	38	127	80	27.7
13	118	106.14	23	80	63	3.4	40	338	323.74	38	127	90	30.4
14	127	114.15	23	88	63	3.9	42	354	339.89	38	127	90	33
15	135	122.17	23	95	63	4.4	45	378	364.12	38	127	90	37.5
16	143	130.2	23	100	71	5.4	48	403	388.36	38	127	90	43
17	151	138.23	23	100	71	6	50	419	404.52	38	127	90	46
18	159	146.27	23	120	71	7.5	54	451	436.84	38	127	90	52.5
19	167	154.32	23	120	71	8	60	500	485.33	38	127	90	64
20	176	162.37	23	130	71	9	65	540	525.73	38	127	90	73.5
21	184	170.42	23	130	71	10.3	70	581	566.15	38	127	90	90.4
22	192	178.48	33	117	71	11							
23	200	186.54	33	117	71	11.8							
24	208	194.6	33	117	80	12.6							
25	216	202.66	33	117	80	13.4							
26	224	210.72	33	117	80	14.3							
28	241	226.86	33	117	80	16							
30	257	243	33	117	80	18.3							
32	273	259.14	33	117	80	20.4							

註：
節距 25.4mm
內鏈節內寬 15.88mm
滾子直徑 15.88mm

美規標準鏈輪 NO.100 SPROCKETS 31.75Pitch

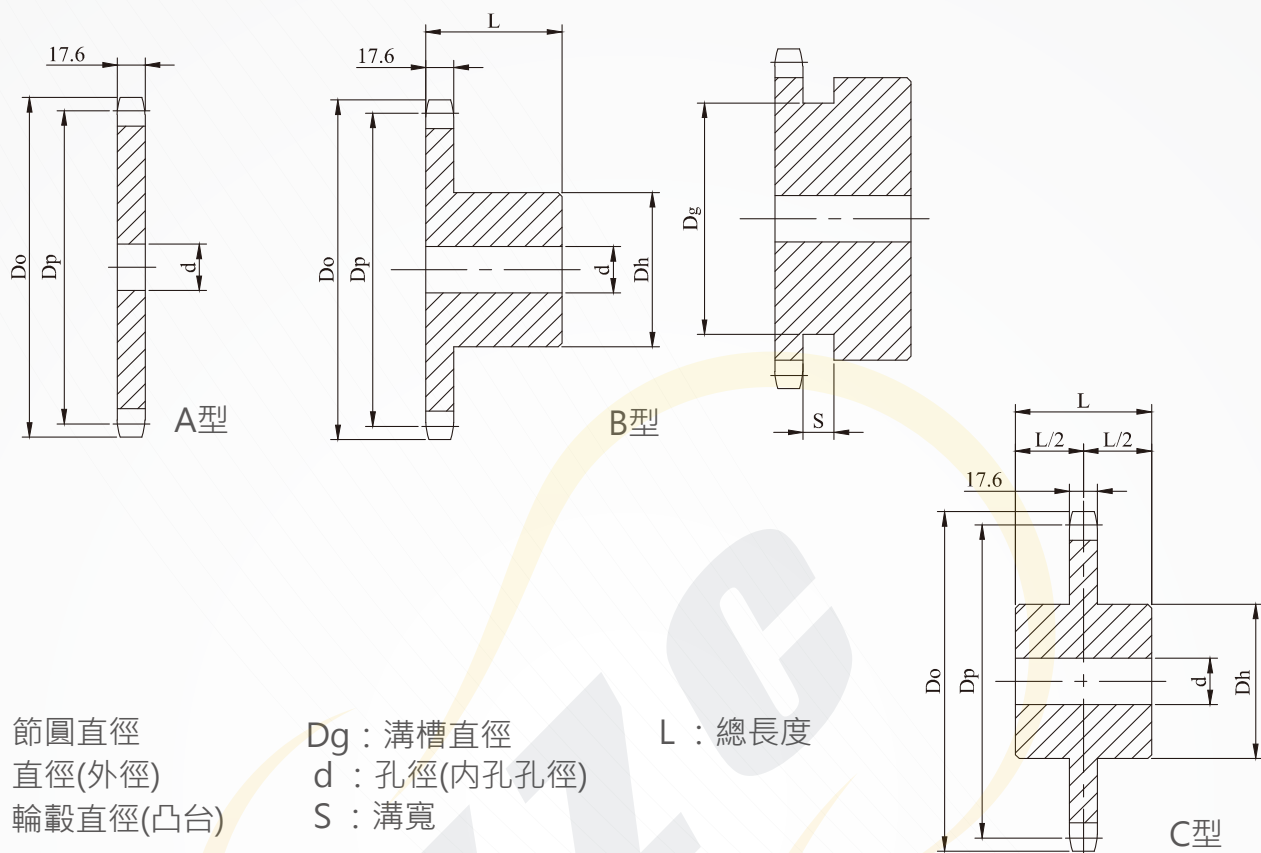

Dp : 節圓直徑
Do : 直徑(外徑)
Dh : 輪轂直徑(凸台)

Dg : 溝槽直徑
d : 孔徑(內孔孔徑)
S : 溝寬

L : 總長度

Single Type B & Single Type C

材質 : C45 單位 : mm

型式	齒數	外徑	節圓直徑	孔徑	凸台		概重 (kg)
					直徑	總長度	
Single Type B	9	106	92.84	20	70	50	1.6
	10	117	102.74	20	65	50	1.9
	11	127	112.7	20	75	50	2.3
	12	138	122.67	20	86	50	2.9
	13	148	132.67	20	94	50	3.1
	14	158	142.68	20	98	50	3.6
	15	168	152.71	20	98	50	4.2
	16	179	162.74	20	98	50	4.6
	17	189	172.79	20	107	50	5.3
	18	199	182.84	20	107	50	5.7
	19	209	192.9	20	107	50	6.1
	20	220	202.96	20	107	50	6.5
	21	230	213.03	20	107	50	7
	22	240	223.1	20	117	56	7.9
	23	250	233.17	20	117	56	8.5
	24	260	243.25	20	117	56	8.8
	25	270	253.32	20	117	56	9.3
	26	281	263.4	20	117	56	9.8
	27	291	273.49	20	117	56	10.3
	28	301	283.57	20	117	56	10.9


型式	齒數	外徑	節圓直徑	孔徑	凸台		概重 (kg)
					直徑	總長度	
Single Type B	29	311	293.66	20	117	56	11.5
	30	321	303.75	26	117	56	12.1
	32	341	323.92	26	117	56	14.5
	33	352	334.01	26	117	56	16.1
	34	362	344.11	26	117	56	16.6
	35	372	354.2	26	127	63	17.5
	36	382	364.39	26	127	63	18
	37	392	374.38	26	127	63	18.9
	38	402	384.48	26	127	63	19.5
	40	422	404.67	26	127	63	20.4
	41	433	414.77	26	127	63	21.5
	42	443	424.86	26	127	63	22.6
	45	473	455.16	26	127	63	24.7
	47	493	475.35	26	127	63	26.7
	48	503	485.45	26	127	63	27.5
	50	524	505.65	26	127	63	30
Single Type C	54	564	546.05	26	147	80	37.4
	55	574	556.15	26	147	80	41.6
	60	625	606.66	26	147	80	44.3
	65	675	657.17	26	147	80	54.5
	70	726	707.68	26	147	100	64.7
	75	777	758.2	26	147	100	72.7

註：
節距
內鏈節內寬
滾子直徑

31.75mm
19.05mm
19.05mm

齒數	S	Dg
9	11.5	55

美規標準鏈輪 NO.100 SPROCKETS 31.75Pitch

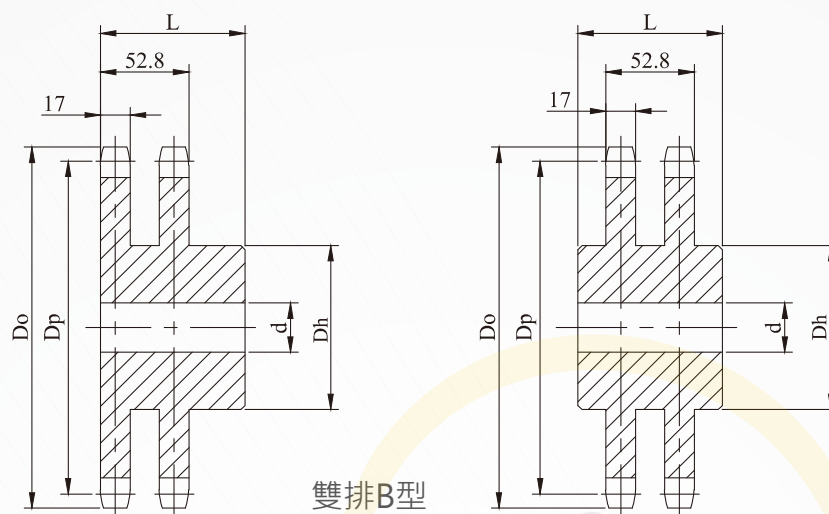

Dp : 節圓直徑
Do : 直徑(外徑)
Dh : 輪轂直徑(凸台)

d : 孔徑(內孔孔徑)
L : 總長度


Double Type B & Double Type C

材質 : C45 單位 : mm

型式	齒數	外徑	節圓直徑	孔徑	凸台		概重 (kg)
					直徑	總長度	
Double Type B	10	117	102.74	22	70	80	3.5
	11	127	112.7	22	80	80	4.2
	12	138	122.67	28	90	80	5
	13	148	132.67	28	100	80	6
	14	158	142.68	28	110	80	7
	15	168	152.71	28	120	80	7.1
	16	179	162.74	28	130	80	7.7
	17	189	172.79	28	130	80	8.9
	18	199	182.84	28	130	80	9.6
	19	209	192.9	28	130	90	12.8
	20	220	202.96	28	130	90	13.5
	21	230	213.03	28	130	90	14.3
	22	240	223.1	28	127	90	19.35
	23	250	233.17	28	127	90	20.85
	24	260	243.25	38	137	90	22.62
	25	270	253.32	38	137	90	24.25
	26	281	263.4	38	137	90	25.94
	28	301	283.57	38	137	90	29.52
	30	321	303.75	38	137	90	33.37
	32	341	323.92	38	137	90	37.48
型式	齒數	外徑	節圓直徑	孔徑	凸台		概重 (kg)
					直徑	總長度	
Double Type B	35	372	354.2	38	137	90	44.15
	36	382	364.39	38	137	90	46.5
	38	402	384.48	38	137	90	51.94
	40	422	404.67	38	147	100	58.46
	42	443	424.86	38	147	100	63.9
	45	473	455.16	38	147	100	72.56
	48	503	485.45	38	147	100	81.81
	50	524	505.65	38	147	100	88.31
Double Type C	54	564	546.05	38	147	100	102.19
	60	625	606.66	38	147	125	127.87

註：
節距 31.75mm
內鏈節內寬 19.05mm
滾子直徑 19.05mm

美規標準鏈輪 NO.120 SPROCKETS 38.10Pitch

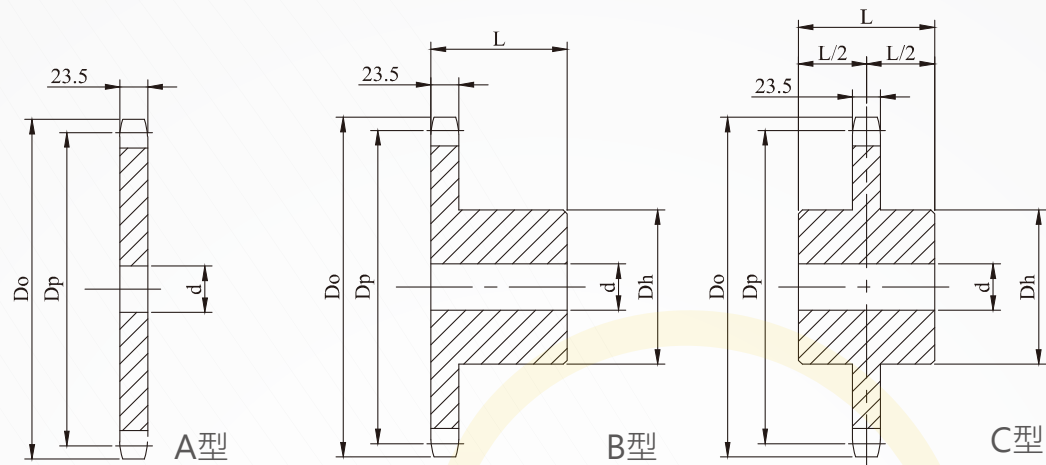

Dp：節圓直徑
Do：直徑(外徑)
Dh：輪轂直徑(凸台)
d：孔徑(內孔孔徑)
L：總長度

Single Type B & Single Type C


材質：C45 單位：mm

型式	齒數	外徑	節圓直徑	孔徑	凸台		概重 (kg)
					直徑	總長度	
Single Type B	10	140	123.29	20	78	56	3.2
	11	153	135.24	20	91	56	4
	12	165	147.21	20	98	56	4.8
	13	177	159.2	20	98	56	5.3
	14	190	171.22	20	107	56	6.3
	15	202	183.25	20	117	63	7.8
	16	214	195.29	20	117	63	8.4
	17	227	207.35	20	117	63	9.1
	18	239	219.41	20	117	63	9.9
	19	251	231.48	20	117	63	10.7
	20	263	243.55	20	127	63	12.1
	21	276	255.63	20	127	63	13
	22	288	267.72	26	127	63	13.4
	23	300	279.8	26	127	63	14.5
	24	312	291.9	26	127	63	15.2
	25	324	303.99	26	127	63	16.2
Single Type C	26	337	316.09	26	127	63	17.2
	28	361	340.29	26	137	71	20.9
	30	385	364.5	26	137	71	23.2
	32	410	388.71	26	137	71	25.7


型式	齒數	外徑	節圓直徑	孔徑	凸台		概重 (kg)
					直徑	總長度	
Single Type B	33	422	400.82	26	137	71	28.4
	34	434	412.93	26	137	71	29
	35	446	425.04	26	137	71	29.7
	36	458	437.15	26	137	71	32
	38	483	461.38	26	137	71	35
	40	507	485.6	26	147	80	38.2
	42	531	509.84	26	147	80	42
	45	568	546.19	26	147	80	47.6
	48	604	582.54	26	147	80	53
	50	628	606.78	26	147	80	58
Single Type C	54	677	655.26	26	147	100	65.2
	60	750	727.99	26	167	100	78

註：
節距 38.1mm
內鏈節內寬 25.4mm
滾子直徑 22.23mm

美規標準鏈輪 NO.120 SPROCKETS 38.10Pitch

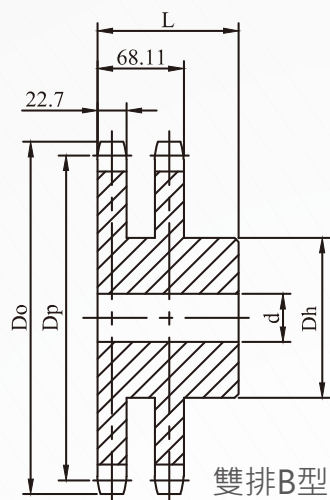

雙排B型

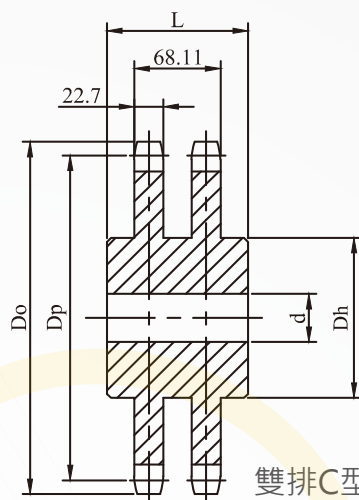

雙排C型

Dp：節圓直徑

d：孔徑(內孔孔徑)

Do：直徑(外徑)

L：總長度

Dh：輪轂直徑(凸台)

Double Type B & Double Type C

材質：C45 單位：mm

型式	齒數	外徑	節圓直徑	孔徑	凸台		概重 (kg)
					直徑	總長度	
Double Type B	10	140	123.29	26	80	100	8
	11	153	135.24	26	90	100	8.7
	12	165	147.21	28	100	100	9.2
	13	177	159.2	28	115	100	10.9
	14	190	171.22	28	120	100	11.4
	15	202	183.25	38	120	100	13.2
	16	214	195.29	38	140	100	16.5
	17	227	207.35	38	140	100	19
	18	239	219.41	38	150	100	21
	19	251	231.48	38	150	100	23
	20	263	243.55	38	150	100	26
	21	276	255.63	38	150	100	28
	22	288	267.72	38	147	100	30
	23	300	279.8	38	147	100	33
	24	312	291.9	38	157	100	31
	25	324	303.99	38	157	100	33
	26	337	316.09	38	157	100	35
	28	361	340.29	38	157	100	39
	30	385	364.5	38	157	100	43
	32	410	388.71	38	157	100	47
	35	446	425.04	38	157	100	56.8
	36	458	437.15	38	157	100	60
	38	483	461.38	38	157	100	0

型式	齒數	外徑	節圓直徑	孔徑	凸台		概重 (kg)
					直徑	總長度	
Double Type C	40	507	485.6	43	177	140	84.3
	42	531	509.84	43	177	140	87
	45	568	546.19	43	177	140	98.5
	48	604	582.54	43	177	140	104
	50	628	606.78	43	177	140	115
	54	677	655.26	43	177	140	121
	60	750	727.99	43	177	140	131.6

註：

節距

38.1mm


內鏈節內寬

25.4mm

滾子直徑

22.23mm

美規標準鏈輪 NO.140 SPROCKETS 44.45Pitch

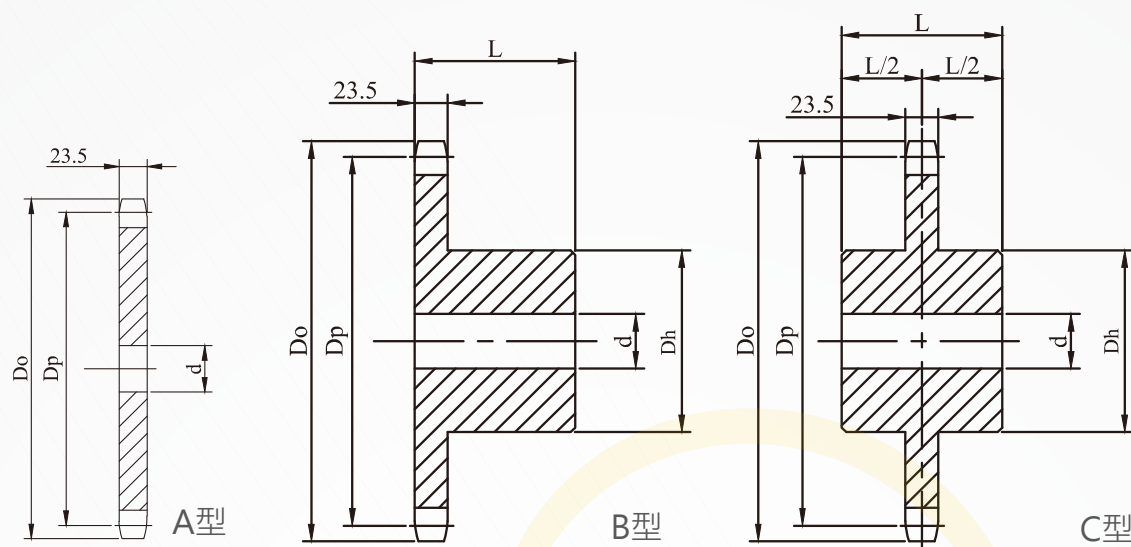

Dp : 節圓直徑
Do : 直徑(外徑)
Dh : 輪轂直徑(凸台)
d : 孔徑(內孔孔徑)
L : 總長度

Single Type B & Single Type C


材質 : C45 單位 : mm

型式	齒數	外徑	節圓直徑	孔徑	凸台		概重 (kg)
					直徑	總長度	
Single Type B	10	163	143.84	26	98	56	4.9
	11	178	157.78	26	106	56	5.5
	12	193	171.74	26	117	56	6.6
	13	207	185.74	26	117	63	7.9
	14	221	199.76	26	127	63	9.3
	15	236	213.79	26	127	63	10.1
	16	250	227.84	26	127	63	11
	17	264	241.91	26	127	63	12
	18	279	255.98	26	127	63	13
	19	293	270.06	26	137	71	15.6
	20	307	284.15	26	137	71	16.7
	21	322	298.24	26	137	71	17.9
	22	336	312.34	26	137	71	18.4
	23	350	326.44	26	137	71	20.1
	24	364	340.54	26	137	71	20.9
	25	379	354.65	26	147	80	24.1
	26	393	368.77	26	147	80	25.5
	27	407	382.88	26	147	80	28.2
	28	421	397	26	147	80	30.1
	30	450	425.24	26	147	80	31.5
	32	478	453.49	26	147	80	36
	35	521	495.88	26	157	90	42.9
	36	535	510.01	26	157	90	47.4
	38	563	538.27	26	157	90	51
	40	591	566.54	26	157	90	53.1
	42	620	594.81	26	157	90	60

型式	齒數	外徑	節圓直徑	孔徑	凸台		概重 (kg)
					直徑	總長度	
Single Type C	45	662	637.63	26	167	100	68
	48	705	679.63	26	167	100	75
	50	733	707.91	26	167	100	85.3
	54	790	764.47	26	167	100	97.4
	60	875	849.32	26	167	112	119.3

註：
節距 44.45mm
內鏈節內寬 25.22mm
滾子直徑 25.4mm

美規標準鏈輪 NO.160 SPROCKETS 50.80Pitch

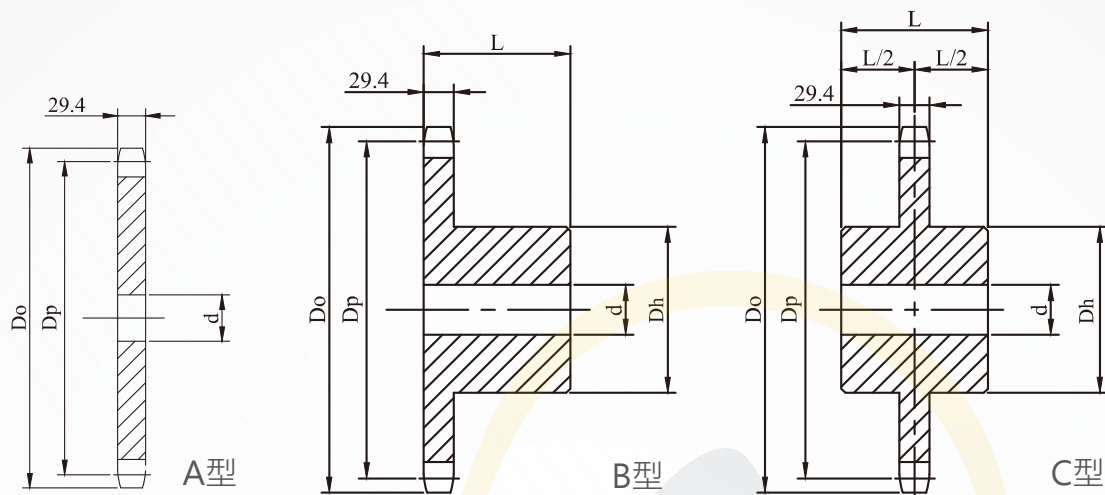

Dp : 節圓直徑
Do : 直徑(外徑)
Dh : 輪轂直徑(凸台)

d : 孔徑(內孔孔徑)
L : 總長度

Single Type B & Single Type C


材質 : C45 單位 : mm

型式	齒數	外徑	節圓直徑	孔徑	凸台		概重 (kg)
					直徑	總長度	
Single Type B	10	186	164.39	26	105	63	6.8
	11	204	180.31	26	117	63	8.3
	12	220	196.28	26	127	63	9.9
	13	237	212.27	26	137	71	12.5
	14	253	228.3	26	137	71	13.8
	15	269	244.33	26	137	71	15.2
	16	286	260.39	26	147	71	17.4
	17	302	276.46	26	147	71	18.9
	18	319	292.55	26	147	71	20.6
	19	335	308.64	26	147	71	22.3
	20	351	324.74	26	147	71	24.2
	21	368	340.84	26	147	71	26.1
	22	384	356.96	26	167	80	30.2
	24	416	389.19	26	167	80	34.4
	25	433	405.32	26	167	80	36.6
	26	449	421.45	26	167	80	38.9
	30	514	485.99	26	167	100	52.3
	32	546	518.28	26	167	100	59
	35	595	566.71	26	167	100	66.9

型式	齒數	外徑	節圓直徑	孔徑	凸台		概重 (kg)
					直徑	總長度	
Single Type C	40	676	647.47	26	167	112	88
	45	757	728.25	26	187	125	115
	48	806	776.72	26	187	125	128
	50	838	809.04	26	187	125	138.7
	54	903	873.68	26	187	125	158.4
	60	1000	970.65	26	187	125	190.8

註：
節距 50.8mm
內鏈節內寬 31.55mm
滾子直徑 28.58mm

歐規標準鏈輪 NO.03B SPROCKETS 5Pitch

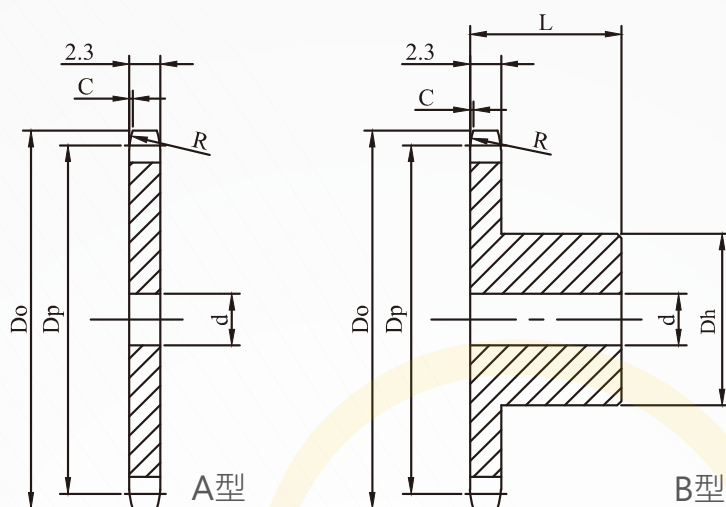

Dp：節圓直徑
Do：直徑(外徑)
Dh：輪轂直徑(凸台)

d：孔徑(內孔孔徑)
L：總長度


材質：C45 單位：mm

齒數	外徑	節圓直徑	單排A型	單排B型		
			孔徑	孔徑	凸台直徑	總長度
8	15.2	13.06	4	4	7	10
9	16.8	14.62	4	5	8	10
10	18.3	16.18	4	5	9	10
11	19.9	17.75	5	6	11	10
12	21.5	19.32	5	6	12	10
13	23	20.89	5	6	14	10
14	24.6	22.47	5	6	15	10
15	26.2	24.04	5	6	16	10
16	27.8	25.63	6	8	18	13
17	29.4	27.2	6	8	18	13
18	30.9	28.79	6	8	18	13
19	32.5	30.38	6	8	18	13
20	34.1	31.96	6	8	18	13
21	35.7	33.54	8	8	20	13
22	37.3	35.13	8	8	20	13
23	38.9	36.72	8	8	20	13
24	40.5	38.3	8	8	20	13
25	42	39.89	8	8	20	13
26	43.6	41.48	8	8	25	15
27	45.2	43.07	8	8	25	15

齒數	外徑	節圓直徑	單排A型	單排B型		
			孔徑	孔徑	凸台直徑	總長度
28	46.8	44.65	8	8	25	15
29	48.4	46.25	8	8	25	15
30	50	47.83	8	8	25	15
31	51.6	49.42	8	8	30	15
32	53.2	51.01	8	8	30	15
33	54.8	52.6	8	8	30	15
34	56.3	54.19	8	8	30	15
35	57.9	55.78	8	8	30	15
36	59.5	57.37	8	8	30	15
37	61.1	58.96	8	8	30	15
38	62.7	60.54	8	8	30	15
39	64.3	62.13	8	8	30	15
40	65.9	63.73	8	8	30	15

註：
節距 5mm
內鏈節內寬 2.5mm
滾子直徑 3.2mm
圓弧倒角R 5mm
圓弧寬C 0.6mm

歐規標準鏈輪 NO.04B SPROCKETS 6Pitch

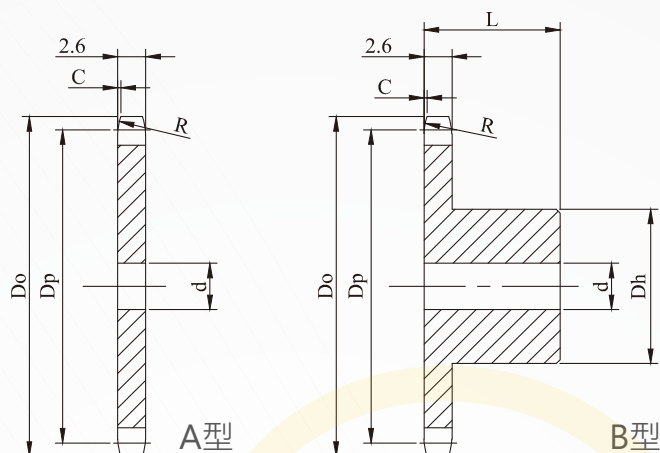

Dp：節圓直徑

Do：直徑(外徑)

Dh：輪轂直徑(凸台)

d：孔徑(內孔孔徑)

L：總長度


材質：C45 單位：mm

齒數	外徑	節圓直徑	單排A型	單排B型		
			孔徑	孔徑	凸台直徑	總長度
8	18	15.67	5	5	9.8	10
9	19.9	17.54	5	5	11.5	10
10	21.7	19.42	6	6	13	10
11	23.7	21.3	6	6	14	10
12	25.4	23.18	6	6	16	10
13	27.3	25.05	8	8	18	10
14	29.2	26.96	8	8	20	10
15	31.1	28.86	8	8	20	10
16	33	30.76	8	8	20	13
17	35	32.65	8	8	20	13
18	36.9	34.55	8	8	20	13
19	38.8	36.44	8	8	20	13
20	40.7	38.34	8	8	20	13
21	42.6	40.25	8	8	25	13
22	44.5	42.16	8	8	25	13
23	46.4	44.06	8	8	25	13
24	48.3	45.96	8	8	25	13
25	50.2	47.87	8	8	25	13
26	52.1	49.77	8	8	30	15
27	54	51.67	8	8	30	15
28	55.9	53.58	8	8	30	15
29	57.8	55.5	8	8	30	15
30	59.8	57.42	8	8	30	15
31	61.7	59.31	8	8	30	15
32	63.6	61.21	8	8	30	15

齒數	外徑	節圓直徑	單排A型	單排B型		
			孔徑	孔徑	凸台直徑	總長度
33	65.5	63.11	8	8	30	15
34	67.4	65.02	8	8	30	15
35	69.3	66.93	8	8	30	15
36	71.2	68.84	8	8	30	15
37	73.1	70.75	8	8	30	15
38	75	72.66	8	8	30	15
39	76.9	74.56	8	8	30	15
40	78.9	76.47	8	8	30	15
41	80.8	78.38	10	10	40	18
42	82.7	80.28	10	10	40	18
43	84.7	82.19	10	10	40	18
44	86.6	84.1	10	10	40	18
45	88.5	86.01	10	10	40	18
46	90.4	87.92	10	10	40	18
47	92.3	89.83	10	10	40	18
48	94.2	91.74	10	10	40	18
49	96.1	93.64	10	10	40	18
50	98	95.55	10	12	50	20
57	111.4	108.93	12	12	50	20
65	126.6	124.18	14	12	50	20
76	147.6	145.19	16	12	60	20
85	164.8	162.37	16	14	60	25
95	183.9	181.47	16	14	60	25
114	220.2	217.75	16	14	60	25
125	241.2	238.75	16	14	60	25

註：
 節距 6mm
 內鏈節內寬 2.8mm
 滾子直徑 4mm
 圓弧倒角R 6mm
 圓弧寬C 0.7mm

歐規標準鏈輪 NO.05B SPROCKETS 8Pitch

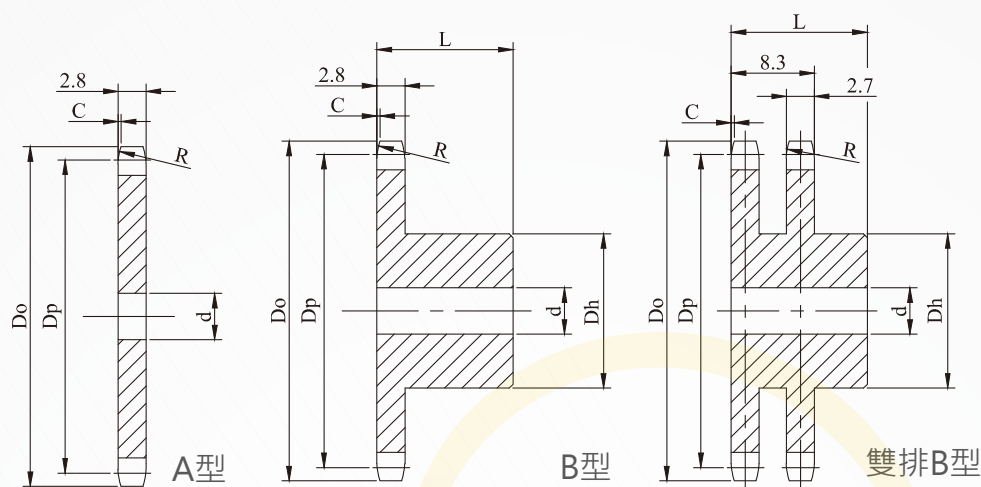

Dp : 節圓直徑
Do : 直徑(外徑)
Dh : 輪轂直徑(凸台)
d : 孔徑(內孔孔徑)
L : 總長度


材質 : C45 單位 : mm

齒數	外徑	節圓直徑	單排B型			雙排B型		
			孔徑	凸台直徑	總長度	孔徑	凸台直徑	總長度
8	24	20.9	6	13	12	8	12	18
9	26.6	23.39	6	15	12	8	15	18
10	29.2	25.89	8	17	12	8	17	18
11	31.7	28.39	8	18	13	10	19	18
12	34.2	30.91	8	20	13	10	21	18
13	36.7	33.42	8	23	13	10	24	18
14	39.2	35.95	8	25	13	10	26	18
15	41.7	38.48	8	28	13	10	29	18
16	44.3	41.01	8	30	14	10	32	20
17	46.8	43.53	8	30	14	10	34	20
18	49.3	46.07	8	30	14	10	37	20
19	51.9	48.61	8	30	14	10	39	20
20	54.4	51.14	8	30	14	10	40	20
21	57	53.67	8	35	14	10	40	20
22	59.5	56.21	8	35	14	10	40	20
23	62	58.75	8	35	14	10	40	20
24	64.6	61.29	8	35	14	10	40	20
25	67.5	63.83	8	35	14	10	40	20
26	69.5	66.37	10	40	16	12	50	22
27	72.2	68.91	10	40	16	12	50	22
28	74.8	71.45	10	40	16	12	50	22
29	77.3	73.99	10	40	16	12	50	22
30	79.8	76.53	10	40	16	12	50	22
31	82.4	79.08	10	40	16	12	60	22
32	84.9	81.61	10	40	16	12	60	22

齒數	外徑	節圓直徑	單排B型			雙排B型		
			孔徑	凸台直徑	總長度	孔徑	凸台直徑	總長度
33	87.5	84.16	10	40	16	12	60	22
34	90	86.7	10	40	16	12	60	22
35	92.5	89.24	10	40	16	12	60	22
36	95	91.79	10	40	16	12	60	22
37	97.6	94.33	10	40	16	12	60	22
38	100.2	96.88	10	40	16	12	60	22
39	102.7	99.42	10	40	16	12	60	22
40	105.2	101.97	10	40	16	12	60	22
41	107.8	104.51	12	40	20	14	65	25
42	110.4	107.05	12	40	20	14	65	25
43	112.9	109.6	12	40	20	14	65	25
44	115.5	112.14	12	40	20	14	65	25
45	118	114.69	12	60	20	14	65	25
48	125.6	122.32	12	60	20	14	65	25
50	130.7	127.41	12	60	20	14	65	25
54	140.9	137.59	14	60	20	16	80	25
57	148.6	145.22	14	60	20	16	80	25
60	156.2	152.85	14	60	20	16	80	25
65	169.2	165.58	16	60	20	20	83	30
70	182.4	178.31	16	60	20	20	83	30
76	197.7	193.59	20	68	25	24	93	30
85	220.6	216.5	20	68	25	24	93	30
95	246.1	241.96	20	68	25	24	93	30
100	258.9	254.68	20	73	25	24	93	30
110	284.3	280.15	20	73	30	24	93	30
114	294.5	290.33	20	73	30	24	93	30

註：
節距 8mm
內鏈節內寬 3mm
滾子直徑 5mm
圓弧倒角R 8mm
圓弧寬C 1mm

歐規標準鏈輪 NO.06B SPROCKETS 9.525Pitch

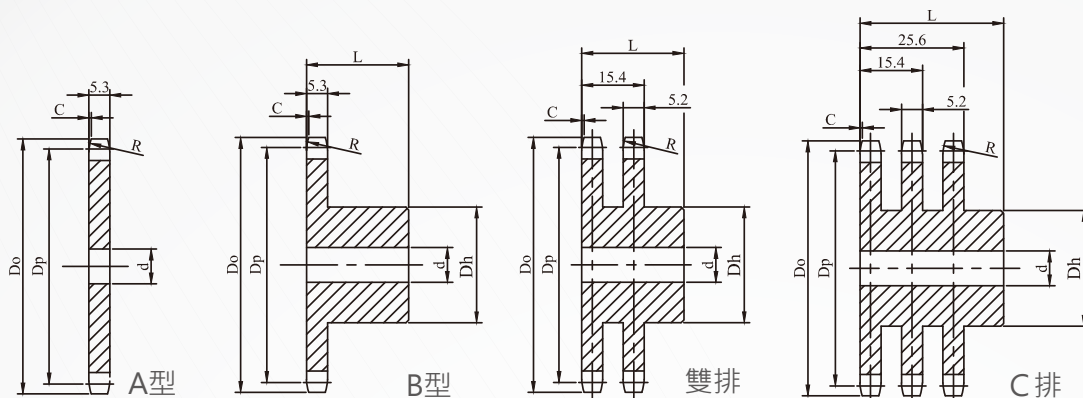

材質：C45 單位：mm

Dp：節圓直徑

Do：直徑(外徑)

Dh：輪轂直徑(凸台)

d：孔徑(內孔孔徑)


L：總長度

齒數	外徑	節圓直徑	單排B型			雙排B型			三排B型		
			孔徑	凸台直徑	總長度	孔徑	凸台直徑	總長度	孔徑	凸台直徑	總長度
8	28	24.89	8	15	22	6	15	22	6	15	32
9	31	27.85	8	18	22	8	18	22	8	18	32
10	34	30.82	8	20	22	8	20	22	10	20	32
11	37	33.8	8	22	25	10	22	25	10	22	35
12	40	36.8	8	25	25	10	25	25	10	25	35
13	43	39.8	10	28	25	10	28	25	10	28	35
14	46.3	42.8	10	31	25	10	31	25	12	31	35
15	49.3	45.81	10	34	25	10	34	25	12	34	35
16	52.3	48.82	10	37	28	12	37	30	12	37	35
17	55.3	51.83	10	40	28	12	40	30	12	40	35
18	58.3	54.85	10	43	28	12	43	30	12	43	35
19	61.3	57.87	10	45	28	12	46	30	12	46	35
20	64.3	60.89	10	46	28	12	49	30	12	49	35
21	68	63.91	12	48	28	12	52	30	14	52	40
22	71	66.93	12	50	28	12	55	30	14	55	40
23	73.5	69.95	12	52	28	12	58	30	14	58	40
24	77	72.97	12	54	28	12	61	30	14	61	40
25	80	76	12	57	28	12	64	30	14	64	40
26	83	79.02	12	60	28	12	67	30	14	67	40
27	86	82.04	12	60	28	12	70	30	14	70	40
28	89	85.07	12	60	28	12	73	30	14	73	40
29	92	88.09	12	60	28	12	76	30	14	76	40
30	94.7	91.12	12	60	30	12	79	30	14	79	40
31	98.3	94.15	14	65	30	16	80	30	16	80	40
32	101.3	97.17	14	65	30	16	80	30	16	80	40
33	104.3	100.2	14	65	30	16	80	30	16	80	40
34	107.3	103.23	14	65	30	16	80	30	16	85	40
35	110.4	106.26	14	65	30	16	80	30	16	85	40
36	113.4	109.29	16	70	30	16	90	30	16	90	40
37	116.4	112.32	16	70	30	16	90	30	16	90	40
38	119.5	115.34	16	70	30	16	90	30	16	90	40
39	122.5	118.37	16	70	30	16	90	30	16	90	40
40	125.5	121.4	16	70	30	16	90	30	16	90	40
41	128.5	124.43	16	70	30	19	90	30			
42	131.6	127.46	16	70	30	19	90	30			
43	134.6	130.48	16	70	30	19	90	30			
44	137.6	133.53	16	70	30	19	90	30			
45	140.7	136.55	16	70	30	19	90	30			
48	149.7	145.64	16	70	30	19	90	30			
50	155.7	151.69	16	70	30	19	90	30			
54	167.8	163.8	16	70	30	19	90	30			
60	186	181.99	16	70	30	19	90	30			
65	201.6	197.15	16	70	30	19	90	30			
70	216.7	212.29	16	70	30	19	90	30			
75	231.9	227.46	16	70	30	19	90	30			
80	247.1	242.62	16	70	30	19	90	30			

註：
節距
內鏈節內寬
滾子直徑
圓弧倒角R
圓弧寬C

9.525mm
5.72mm
6.35mm
10mm
1mm

歐規標準鏈輪 NO.08B SPROCKETS 12.7Pitch

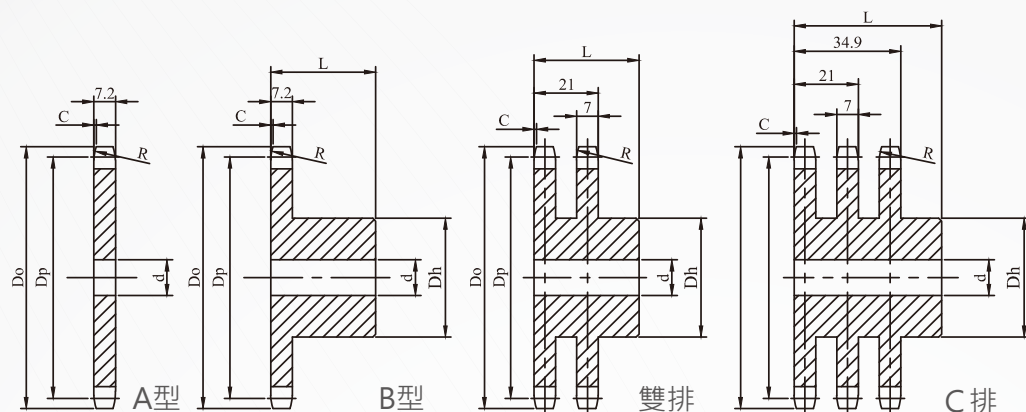


材質：C45 單位：mm

Dp：節圓直徑
Do：直徑(外徑)
Dh：輪轂直徑(凸台)
d：孔徑(內孔孔徑)
L：總長度

齒數	外徑	節圓直徑	單排B型			雙排B型			三排B型		
			孔徑	凸台直徑	總長度	孔徑	凸台直徑	總長度	孔徑	凸台直徑	總長度
8	37.2	33.18	10	20	25	10	20	32	10	20	46
9	41	37.13	10	24	25	10	24	32	12	24	46
10	45.2	41.1	10	26	25	10	28	32	12	28	46
11	48.7	45.07	10	29	25	12	32	35	14	32	50
12	53	49.07	10	33	28	12	35	35	14	35	50
13	57.4	53.06	10	37	28	12	38	35	14	38	50
14	61.8	57.07	10	41	28	12	42	35	14	42	50
15	65.5	61.09	10	45	28	12	46	35	14	46	50
16	69.5	65.1	12	50	28	14	50	35	16	50	50
17	73.6	69.11	12	52	28	14	54	35	16	54	50
18	77.8	73.14	12	56	28	14	58	35	16	58	50
19	81.7	77.16	12	60	28	14	62	35	16	62	50
20	85.8	81.19	12	64	28	14	66	35	16	66	50
21	89.7	85.22	12	68	28	16	70	40	20	70	55
22	93.8	89.24	12	70	28	16	70	40	20	70	55
23	98.2	93.27	14	70	28	16	70	40	20	70	55
24	101.8	97.29	14	70	28	16	75	40	20	75	55
25	105.8	101.33	14	70	28	16	80	40	20	80	55
26	110	105.36	16	70	30	20	85	40	20	85	55
27	114	109.4	16	70	30	20	85	40	20	85	55
28	118	113.42	16	70	30	20	90	40	20	90	55
29	122	117.46	16	80	30	20	95	40	20	95	55
30	126.1	121.5	16	80	30	20	100	40	20	100	55
31	130.2	125.54	16	90	30	20	100	40	20	110	55
32	134.3	129.56	16	90	30	20	100	40	20	110	55
33	138.4	133.6	16	90	30	20	100	40	20	110	55
34	142.6	137.64	16	90	30	20	100	40	20	110	55
35	146.7	141.68	16	90	30	20	100	40	20	110	55
36	151	145.72	16	90	35	20	110	40	25	120	55
37	154.6	149.76	16	90	35	20	110	40	25	120	55
38	158.6	153.8	16	90	35	20	110	40	25	120	55
39	162.7	157.83	16	90	35	20	110	40	25	120	55
40	166.8	161.87	16	90	35	20	110	40	25	120	55
41	171.4	165.91	17	90	32	20	110	40			
42	175.4	169.95	17	90	32	20	110	40			
43	179.7	173.98	17	90	32	20	110	40			
44	183.8	178.02	17	90	32	20	110	40			
45	188	182.06	17	90	32	20	110	40			
48	200.3	194.18	17	90	32	20	110	40			
50	208.3	202.26	17	90	32	20	110	40			
54	224.1	218.42	17	90	32	20	110	40			
60	248.6	242.66	17	90	32	20	110	40			
65	269	262.87	17	90	32	20	110	40			
70	289	283.07	19	90	32	20	110	40			
75	309.2	303.28	19	90	32	20	110	40			
80	329.4	323.49	19	90	32	20	110	40			
85	349	343.69	19	90	32	20	110	40			
90	369.9	363.9	19	90	32	20	110	40			

註：
節距 12.7mm
內鏈節內寬 7.75mm
滾子直徑 8.51mm
圓弧倒角R 13mm
圓弧寬C 1.3mm

歐規標準鏈輪 NO.10B SPROCKETS 15.875Pitch

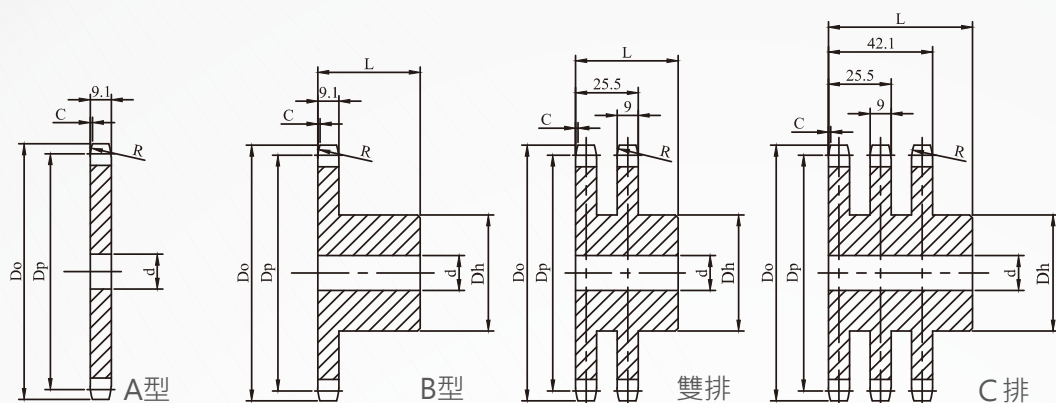

材質：C45 單位：mm

Dp：節圓直徑

Do：直徑(外徑)

Dh：輪轂直徑(凸台)

d：孔徑(內孔孔徑)

L：總長度

齒數	外徑	節圓直徑	單排B型			雙排B型			三排B型		
			孔徑	凸台直徑	總長度	孔徑	凸台直徑	總長度	孔徑	凸台直徑	總長度
8	47	41.48	10	25	25	12	25	40	12	25	55
9	52.6	46.42	10	30	25	12	30	40	12	30	55
10	57.5	51.37	10	35	25	12	35	40	16	35	55
11	63	56.34	12	37	30	14	39	40	16	39	55
12	68	61.34	12	42	30	14	44	40	16	44	55
13	73	66.32	12	47	30	14	49	40	16	49	55
14	78	71.34	12	52	30	14	54	40	16	54	55
15	83	76.36	12	57	30	14	59	40	16	59	55
16	88	81.37	12	60	30	16	64	45	16	64	60
17	93	86.39	12	60	30	16	69	45	16	69	60
18	98.3	91.42	14	70	30	16	74	45	16	74	60
19	103.3	96.45	14	70	30	16	79	45	16	79	60
20	108.4	101.49	14	75	30	16	84	45	16	84	60
21	113.4	106.52	16	75	30	16	85	45	20	85	60
22	118	111.55	16	80	30	16	90	45	20	90	60
23	123.4	116.58	16	80	30	16	95	45	20	95	60
24	128.3	121.62	16	80	30	16	100	45	20	100	60
25	134	126.66	16	80	30	16	105	45	20	105	60
26	139	131.7	20	85	35	20	110	45	20	110	60
27	144	136.75	20	85	35	20	110	45	20	110	60
28	148.7	141.78	20	90	35	20	115	45	20	115	60
29	153.8	146.83	20	90	35	20	115	45	20	115	60
30	158.8	151.87	20	90	35	20	120	45	20	120	60
31	163.9	156.92	20	95	35	20	120	45	20	120	60
32	168.9	161.95	20	95	35	20	120	45	20	120	60
33	174.5	167	20	95	35	20	120	45	20	120	60
34	179	172.05	20	95	35	20	120	45	20	120	60
35	184.1	177.1	20	95	35	20	120	45	20	120	60
36	189.1	182.15	20	100	35	20	120	45	25	120	60
37	194.2	187.2	20	100	35	20	120	45	25	120	60
38	199.2	192.24	20	100	35	20	120	45	25	120	60
39	204.2	197.29	20	100	35	20	120	45	25	120	60
40	209.3	202.34	20	100	35	20	120	45	25	120	60
41	214.8	207.38	20	100	35						
42	219.9	212.43	20	100	35						
43	224.9	217.48	20	100	35						
44	230	222.53	20	100	35						
45	235	227.58	20	100	35						
46	240.1	232.63	20	100	35						
48	250.2	242.73	20	100	35						
50	260.3	252.83	20	100	35						
54	280.5	273.02	20	100	35						
60	310.8	303.33	20	100	35						
65	336.5	328.58	20	100	40						
70	361.8	353.84	20	100	40						
75	387.1	379.1	20	100	40						
80	412.3	404.36	20	100	40						
85	437.6	429.62	20	100	40						
90	462.8	454.8	20	100	40						

註：

節距

內鏈節內寬

滾子直徑

圓弧倒角R

圓弧寬C

15.875mm


9.65mm

10.16mm

16mm

1.6mm

歐規標準鏈輪 NO.12B SPROCKETS 19.05Pitch

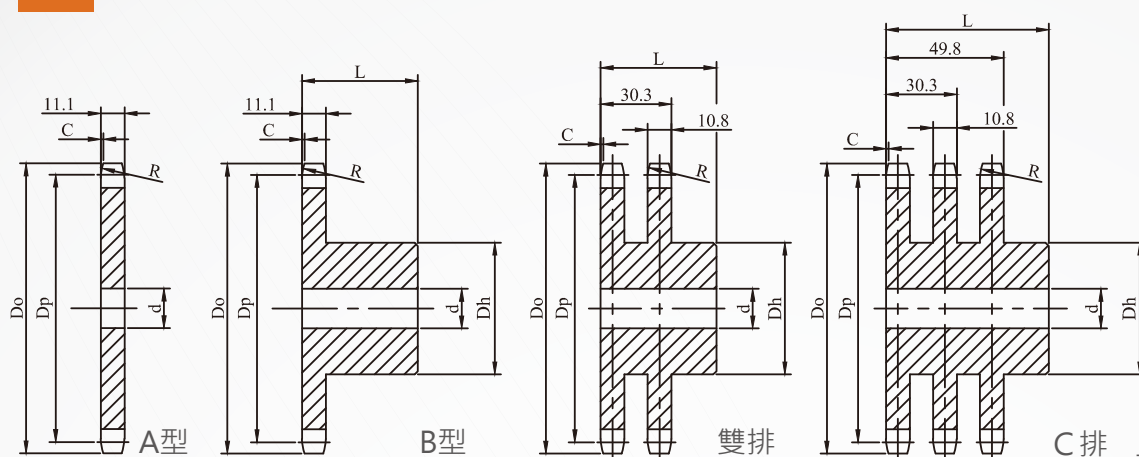

材質：C45 單位：mm

Dp：節圓直徑

Do：直徑(外徑)

Dh：輪轂直徑(凸台)

d：孔徑(內孔孔徑)


L：總長度

齒數	外徑	節圓直徑	單排B型			雙排B型			三排B型		
			孔徑	凸台直徑	總長度	孔徑	凸台直徑	總長度	孔徑	凸台直徑	總長度
8	57.6	49.78	12	31	30	12	31	45	16	31	65
9	62	55.7	12	37	30	12	37	45	16	37	65
10	69	61.64	12	42	30	12	42	45	16	42	65
11	75	67.61	14	46	35	16	47	50	20	47	70
12	81.5	73.6	14	52	35	16	53	50	20	53	70
13	87.5	79.59	14	58	35	16	59	50	20	59	70
14	93.6	85.61	14	64	35	16	65	50	20	65	70
15	99.8	91.63	14	70	35	16	71	50	20	71	70
16	105.5	97.65	16	75	35	20	77	50	20	77	70
17	111.5	103.67	16	80	35	20	83	50	20	83	70
18	118	109.71	16	80	35	20	89	50	20	89	70
19	124.2	115.75	16	80	35	20	95	50	20	95	70
20	129.7	121.78	16	80	35	20	100	50	20	100	70
21	136	127.82	20	90	40	20	100	50	20	100	70
22	141.8	133.86	20	90	40	20	100	50	20	100	70
23	149	139.9	20	90	40	20	110	50	20	110	70
24	153.9	145.94	20	90	40	20	110	50	20	110	70
25	160	152	20	90	40	20	120	50	20	120	70
26	165.9	158.04	20	95	40	20	120	50	20	120	70
27	172.3	164.09	20	95	40	20	120	50	20	120	70
28	178	170.13	20	95	40	20	120	50	20	120	70
29	184.1	176.19	20	95	40	20	120	50	20	120	70
30	190.5	182.25	20	95	40	20	120	50	20	120	70
31	196.3	188.31	20	100	40	20	130	50	25	130	70
32	203.3	194.35	20	100	40	20	130	50	25	130	70
33	209.3	200.4	20	100	40	20	130	50	25	130	70
34	214.6	206.46	20	100	40	20	130	50	25	130	70
35	221	212.52	20	100	40	20	130	50	25	130	70
36	226.8	218.58	20	100	40	25	130	50	25	130	70
37	232.9	224.64	20	100	40	25	130	50	25	130	70
38	239	230.69	20	100	40	25	130	50	25	130	70
39	245.1	236.75	20	100	40	25	130	50	25	130	70
40	251.3	242.81	20	100	40	25	130	50	25	130	70
41	257.3	248.36									
42	264.5	254.92									
45	282.5	273.09									
48	300.1	291.27									
50	312.3	303.39									
54	336.6	327.63									
60	373	363.99									
65	403.2	394.3									
70	433.6	424.61									
75	463.9	454.92									
80	494.2	485.23									
85	524.5	515.54									
90	554.8	545.85									

註：
節距
內鏈節內寬
滾子直徑
圓弧倒角R
圓弧寬C

19.05mm
11.68mm
12.07mm
19mm
2mm

歐規標準鏈輪 NO.16B SPROCKETS 25.4Pitch

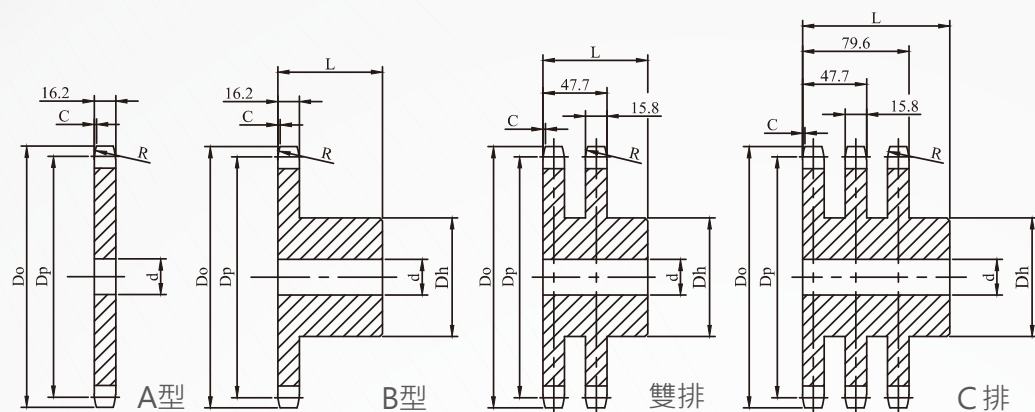

材質：C45 單位：mm

Dp：節圓直徑

Do：直徑(外徑)

Dh：輪轂直徑(凸台)

d：孔徑(內孔孔徑)

L：總長度


齒數	外徑	節圓直徑	單排B型			雙排B型			三排B型		
			孔徑	凸台直徑	總長度	孔徑	凸台直徑	總長度	孔徑	凸台直徑	總長度
8	77	66.37	16	42	35	16	42	65	20	42	95
9	85	74.27	16	50	35	16	50	65	20	50	95
10	93	82.19	16	55	35	16	56	65	20	56	95
11	99.5	90.14	16	61	40	20	64	70	25	64	100
12	109	98.14	16	69	40	20	72	70	25	72	100
13	117	106.12	16	78	40	20	80	70	25	80	100
14	125	114.15	16	84	40	20	88	70	25	88	100
15	133	122.17	16	92	40	20	96	70	25	96	100
16	141	130.2	20	100	45	20	104	70	30	104	100
17	149	138.22	20	100	45	20	112	70	30	112	100
18	157	146.28	20	100	45	20	120	70	30	120	100
19	165.2	154.33	20	100	45	20	128	70	30	128	100
20	173.2	162.38	20	100	45	20	130	70	30	130	100
21	181.2	170.43	20	110	50	25	130	70	30	130	100
22	189.3	178.48	20	110	50	25	130	70	30	130	100
23	197.5	186.53	20	110	50	25	130	70	30	130	100
24	205.5	194.59	20	110	50	25	130	70	30	130	100
25	213.5	202.66	20	110	50	25	130	70	30	130	100
26	221.6	210.72	20	120	50	25	130	70	30	130	100
27	229.6	218.79	20	120	50	25	130	70	30	130	100
28	237.7	226.85	20	120	50	25	130	70	30	130	100
29	245.8	234.92	20	120	50	25	130	70	30	130	100
30	254	243	20	120	50	25	130	70	30	130	100
31	262	251.08	25	120	50	25	140	70	30	140	100
32	270	259.13	25	120	50	25	140	70	30	140	100
33	278.5	267.21	25	120	50	25	140	70	30	140	100
34	287	275.28	25	120	50	25	140	70	30	140	100
35	296.2	283.36	25	120	50	25	140	70	30	140	100
36	304.6	291.44	25	120	50	25	140	70	30	140	100
37	312.6	299.51	25	120	50	25	140	70	30	140	100
38	320.7	307.59	25	120	50	25	140	70	30	140	100
39	328.8	315.67	25	120	50	25	140	70	30	140	100
40	336.9	323.73	25	120	50	25	140	70	30	140	100
41	345	331.81									
42	353	339.89									
43	361.1	347.97									
44	369.1	356.04									
45	377.1	364.12									
46	385.2	372.2									
47	393.2	380.28									
48	401.3	388.36									
49	409.3	396.44									
50	417.4	404.52									
54	448.3	436.84									
60	498.3	485.33									
65	538.8	525.73									
70	579.2	566.15									
75	619.7	606.56									
80	660	616.97									
85	699.9	687.3									
90	740.3	727.8									

註：

節距
內鏈節內寬
滾子直徑
圓弧倒角R
圓弧寬C

25.4mm
17.02mm
15.88mm
26mm
2.5mm

歐規標準鏈輪 NO.20B SPROCKETS 31.75Pitch

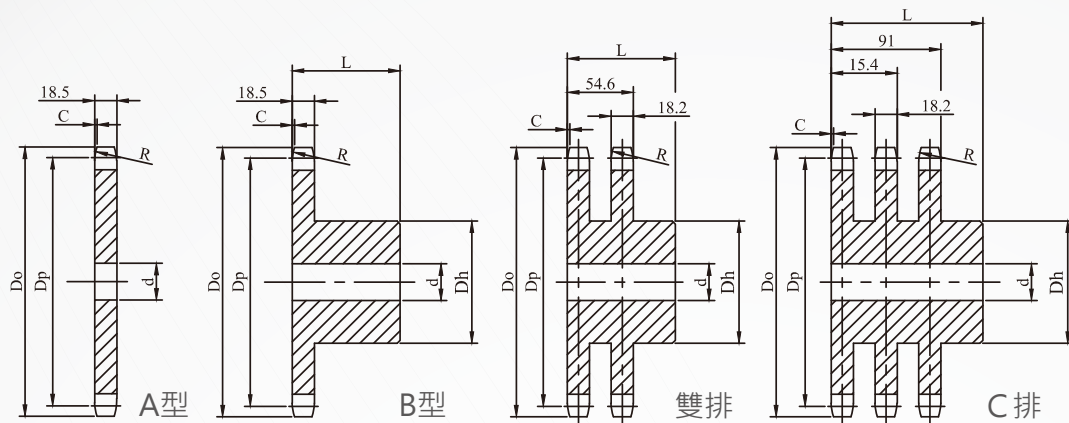

材質：C45 單位：mm

Dp：節圓直徑

Do：直徑(外徑)

Dh：輪轂直徑(凸台)

d：孔徑(內孔孔徑)


L：總長度

齒數	外徑	節圓直徑	單排B型			雙排B型			三排B型		
			孔徑	凸台直徑	總長度	孔徑	凸台直徑	總長度	孔徑	凸台直徑	總長度
8	98.1	82.96	20	53	40	20	53	75	20	53	110
9	108	92.84	20	63	40	20	63	75	20	63	110
10	117.9	102.74	20	70	40	20	70	75	20	70	110
11	127.8	112.68	20	77	45	20	80	80	20	80	115
12	137.8	122.68	20	88	45	20	90	80	20	90	115
13	147.8	132.65	20	98	45	20	100	80	20	100	115
14	157.8	142.68	20	108	45	20	110	80	20	110	115
15	167.9	152.72	20	118	45	20	120	80	20	120	115
16	177.9	162.75	25	120	50	25	120	80	25	120	115
17	187.9	172.78	25	120	50	25	120	80	25	120	115
18	198	182.85	25	120	50	25	120	80	25	120	115
19	208.1	192.91	25	120	50	25	120	80	25	120	115
20	218.1	202.98	25	140	50	25	120	80	25	140	115
21	228.2	213.04	25	140	55	25	140	80	25	140	115
22	238.3	223.11	25	140	55	25	140	80	25	140	115
23	248.3	233.17	25	140	55	25	140	80	25	140	115
24	258.4	243.23	25	140	55	25	140	80	25	140	115
25	268.5	253.33	25	140	55	25	140	80	25	140	115
26	278.6	263.4	25	150	55	25	150	80	25	150	115
27	288.6	273.48	25	150	55	25	150	80	25	150	115
28	298.7	283.56	25	150	55	25	150	80	25	150	115
29	308.8	293.65	25	150	55	25	150	80	25	150	115
30	318.9	303.75	25	150	55	25	150	80	25	150	115
31	329	313.85	25	150	55	25	150	80	30	150	115
32	339.1	323.91	25	150	55	25	150	80	30	150	115
33	349.2	334.01	25	150	55	25	150	80	30	150	115
34	359.3	344.1	25	150	55	25	150	80	30	150	115
35	369.4	354.2	25	150	55	25	150	80	30	150	115
36	379.5	364.3	25	150	55	30	150	80	30	150	115
37	389.5	374.39	25	150	55	30	150	80	30	150	115
38	399.6	384.49	25	150	55	30	150	80	30	150	115
39	409.7	394.59	25	150	55	30	150	80	30	150	115
40	419.8	404.66	25	150	55	30	150	80	30	150	115
41	429.9	414.77									
42	440	424.86									
43	450.1	434.96									
44	460.2	445.06									
45	470.3	455.16									
48	500.6	485.45									
50	520.8	505.65									
54	561.2	546.05									
55	571.3	556.15									
60	621.8	606.17									
65	672.3	657.17									
70	722.8	707.68									
75	773.3	758.2									
85	874.4	859.23									
90	924.9	909.75									

註：
節距
內鏈節內寬
滾子直徑
圓弧倒角R
圓弧寬C

31.75mm
19.56mm
19.05mm
32mm
3.5mm

歐規標準鏈輪 NO.24B SPROCKETS 38.1Pitch

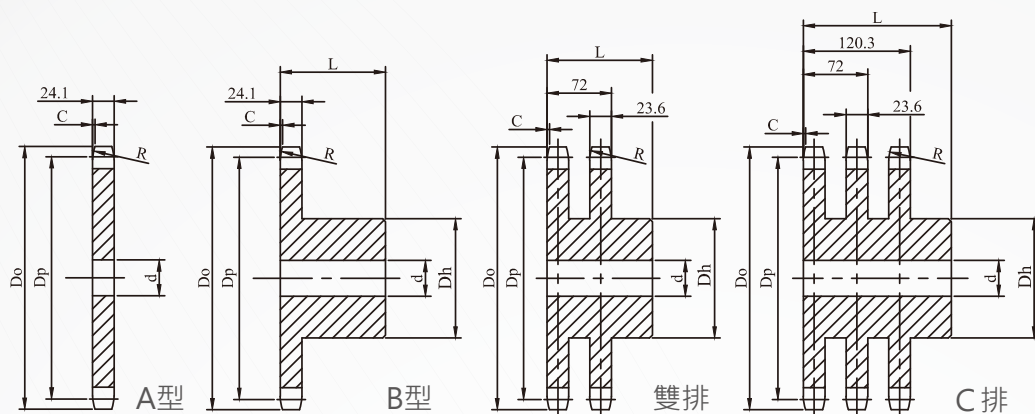

材質：C45 單位：mm

Dp：節圓直徑

Do：直徑(外徑)

Dh：輪轂直徑(凸台)

d：孔徑(內孔孔徑)


L：總長度

齒數	外徑	節圓直徑	單排B型			雙排B型			三排B型		
			孔徑	凸台直徑	總長度	孔徑	凸台直徑	總長度	孔徑	凸台直徑	總長度
8	115	99.55	20	58	45	25	58	95	25	58	140
9	126.4	111.4	20	70	45	25	70	95	25	70	140
10	138	123.29	20	80	45	25	80	95	25	80	140
11	150	135.21	25	90	50	25	90	100	25	90	150
12	162	147.22	25	102	50	25	102	100	25	102	150
13	174.2	159.18	25	114	50	25	114	100	25	114	150
14	186.2	171.22	25	128	50	25	128	100	25	128	150
15	198.2	183.26	25	140	50	25	140	100	25	140	150
16	210.3	195.3	25	140	55	25	140	100	25	140	150
17	222.3	207.34	25	140	55	25	150	100	25	150	150
18	234.3	219.42	25	140	55	25	160	100	25	160	150
19	246.5	231.49	25	140	55	25	160	100	25	160	150
20	258.6	243.57	25	140	55	25	160	100	25	160	150
21	270.6	255.65	25	150	60	25	160	100	30	160	150
22	282.7	267.73	25	150	60	25	160	100	30	160	150
23	294.8	279.8	25	150	60	25	160	100	30	160	150
24	306.8	291.88	25	150	60	25	160	100	30	160	150
25	319	304	25	150	60	25	160	100	30	160	150
26	331	316.08	30	160	60	30	160	100	30	160	150
27	343.2	328.19	30	160	60	30	160	100	30	160	150
28	355.2	340.27	30	160	60	30	160	100	30	160	150
29	367.3	352.38	30	160	60	30	160	100	30	160	150
30	379.5	364.5	30	160	60	30	160	100	30	160	150
31	391.6	376.62	30	160	60	30	170	100	40	170	150
32	403.7	388.69	30	160	60	30	170	100	40	170	150
33	415.8	400.81	30	160	60	30	170	100	40	170	150
34	427.8	412.93	30	160	60	30	170	100	40	170	150
35	440	425.04	30	160	60	30	170	100	40	170	150
36	452	437.16	30	160	60	30	170	100	40	170	150
37	464.2	449.27	30	160	60	30	170	100	40	170	150
38	476.2	461.39	30	160	60	30	170	100	40	170	150
39	488.5	473.5	30	160	60	30	170	100	40	170	150
40	500.6	485.62	30	160	60	30	170	100	40	170	150
41	512.6	497.72									
42	524.7	509.84									
43	536.8	521.95									
45	561.2	546.19									
48	597.4	582.54									
50	621.7	606.78									
54	670.2	655.26									
55	682.3	667.38									
56	694.4	679.5									
57	706.5	691.63									
58	718.6	703.75									
60	742.8	727.99									
65	803.4	788.6									
70	864.2	849.22									
75	924.8	909.84									

註：
節距
內鏈節內寬
滾子直徑
圓弧倒角R
圓弧寬C

38.1mm
25.4mm
25.4mm
38mm
4mm

歐規標準鏈輪 NO.28B SPROCKETS 44.45Pitch

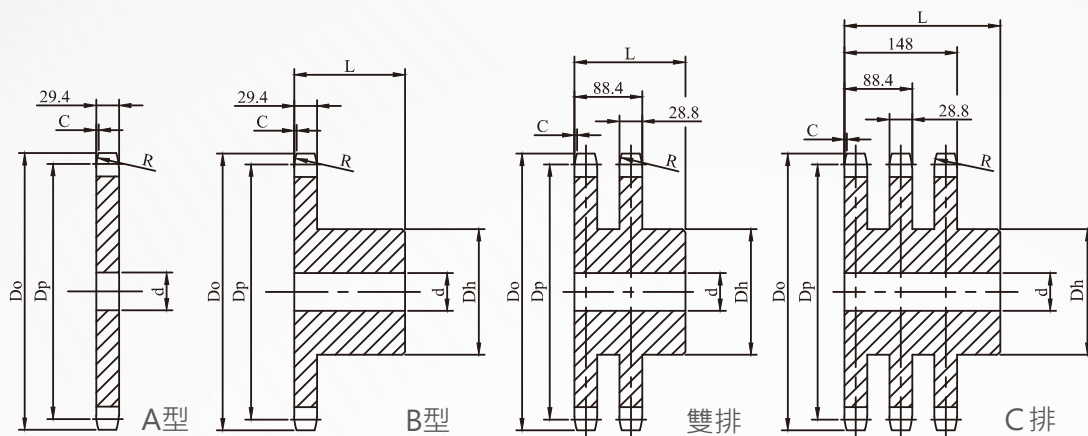

材質：C45 單位：mm

Dp：節圓直徑

Do：直徑(外徑)

Dh：輪轂直徑(凸台)

d：孔徑(內孔孔徑)


L：總長度

齒數	外徑	節圓直徑	單排B型			雙排B型			三排B型		
			孔徑	凸台直徑	總長度	孔徑	凸台直徑	總長度	孔徑	凸台直徑	總長度
8	132	116.15	25	74	70	25	74	120	30	74	180
9	148.4	129.96	25	88	70	25	88	120	30	88	180
10	162.3	143.85	25	100	70	25	100	120	30	100	180
11	176.3	157.77	25	112	70	25	112	120	30	112	180
12	189.3	171.74	25	125	70	25	125	120	30	125	180
13	204.2	185.75	25	130	70	25	130	120	30	130	180
14	218.2	199.76	25	130	70	25	130	120	30	130	180
15	232.3	213.79	25	145	70	30	160	120	30	145	180
16	246.3	227.84	30	160	75	30	160	120	30	160	180
17	260	241.9	30	160	75	30	160	120	30	160	180
18	274	255.98	30	160	75	30	160	120	30	160	180
19	289	270.06	30	160	75	30	180	120	30	180	180
20	303	284.15	30	160	75	30	180	120	30	180	180
21	317	298.24	30	170	75	30	180	120	30	180	180
22	331	312.34	30	170	75	30	180	120	30	180	180
23	345	326.44	30	170	75	30	180	120	30	180	180
24	359	340.55	30	170	75	30	180	120	30	180	180
25	373	354.66	30	170	75	30	180	120	40	180	180
26	387	368.77	30	170	75	30	180	120	40	180	180
27	401	382.88	30	170	75	30	180	120	40	180	180
28	416	397	30	170	75	30	180	120	40	180	180
29	430	411.12	30	170	75	30	180	120	40	180	180
30	444	425.24	30	170	75	30	180	120	40	200	180
31	458	439.37	30	180	75	30	200	120	40	200	180
32	472	453.49	30	180	75	30	200	120	40	200	180
33	486	467.62	30	180	75	30	200	120	40	200	180
34	500	481.75	30	180	75	30	200	120	40	200	180
35	514	495.88	30	180	75	30	200	120	40	200	180
36	529	510.01	30	180	75	30	200	120	40	200	180
37	543	524.13	30	180	75	30	200	120	40	200	180
38	557	538.27	30	180	75	30	200	120	40	200	180
39	571	552.4	30	180	75	30	200	120	40	200	180
40	585	566.54	30	180	75	30	200	120	40	200	180
41	599.2	580.67									
42	613.5	594.81									
43	627.8	608.94									
44	644	623.08									
45	656	637.22									
46	670	651.35									
48	698	679.63									
49	712	693.77									
50	726	707.91									
54	783	764.47									
55	797.5	778.61									
60	869	849.32									

註：
節距
內鏈節內寬
滾子直徑
圓弧倒角R
圓弧寬C

44.45mm
30.99mm
27.94mm
44mm
5mm

歐規標準鏈輪 NO.32B SPROCKETS 50.8Pitch

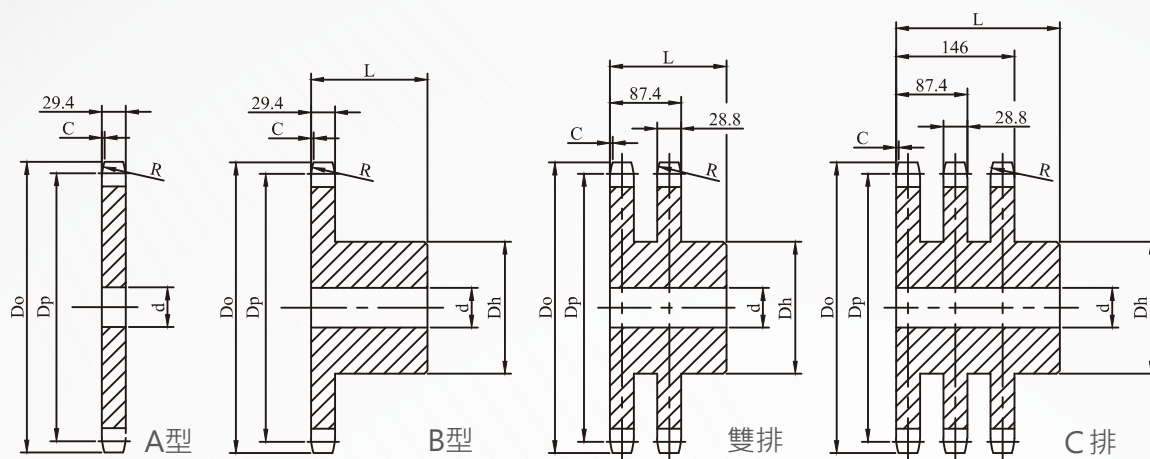

材質：C45 單位：mm

Dp：節圓直徑

Do：直徑(外徑)

Dh：輪轂直徑(凸台)

d：孔徑(內孔孔徑)

L：總長度


齒數	外徑	節圓直徑	單排B型			雙排B型			三排B型		
			孔徑	凸台直徑	總長度	孔徑	凸台直徑	總長度	孔徑	凸台直徑	總長度
8	153.2	132.74	25	82	80	30	82	120	30	82	180
9	169	148.54	25	88	80	30	88	120	30	88	180
10	185	164.39	25	104	80	30	104	120	30	104	180
11	200.8	180.31	30	120	80	30	120	120	30	120	180
12	216.8	196.29	30	133	80	30	133	120	30	133	180
13	232.8	212.29	30	145	80	30	145	120	30	145	180
14	248.8	228.29	30	160	80	30	160	120	30	160	180
15	264.8	244.3	30	160	80	30	160	120	30	160	180
16	280.9	260.4	30	160	90	30	160	120	30	160	180
17	296.9	276.46	30	170	90	30	180	120	30	180	180
18	313	292.55	30	170	90	30	180	120	30	180	180
19	329.1	308.66	30	170	90	30	200	120	30	200	180
20	345.2	324.71	30	180	90	30	200	120	30	200	180
21	361.3	340.82	30	180	90	30	200	120	40	200	180
22	377.5	356.98	30	180	90	30	200	120	40	200	180
23	393.6	373.08	30	180	90	30	200	120	40	200	180
24	409.7	389.18	30	180	90	30	200	120	40	200	180
25	425.8	405.33	30	180	90	30	200	120	40	200	180
26	441.9	421.44	30	180	90	30	200	120	40	200	180
27	458.1	437.59	30	180	90	30	200	120	40	200	180
28	474.2	453.69	30	180	90	30	200	120	40	200	180
29	492	469.85	30	180	90						
30	506.5	486	30	180	90	30	200	120	40	200	180
31	522.7	502.13	30	180	90						
32	538.8	518.27	30	180	90						
35	589.5	566.71	30	180	90						
36	603.3	582.86	30	180	90						
38	635.5	615.16	30	180	90						
40	670.3	647.47	30	180	90						
42	702.6	679.78									
45	751	728.25									
48	799.5	776.76									
50	831.8	809.04									
54	896.5	873.68									
57	945	922.16									
60	993.4	970.65									

註：
節距
內鏈節內寬
滾子直徑
圓弧倒角R
圓弧寬C

50.8mm
30.99mm
29.21mm
51mm
6mm

鏈齒輪的公差配合

鍵槽尺寸表

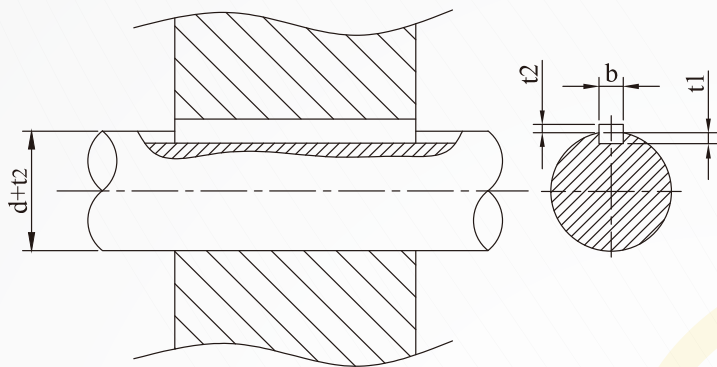

孔徑公差表

單位 $\mu=0.001\text{ mm}$

孔徑		公差		
以上	以下	H7	H8	H10
10	18	+18 0	+27 0	+70 0
18	30	+21 0	+33 0	+84 0
30	50	+25 0	+39 0	+100 0
50	80	+30 0	+46 0	+120 0
80	120	+35 0	+54 0	+140 0
120	180	+40 0	+63 0	+160 0
180	250	+46 0	+72 0	+185 0


孔徑與螺牙之配合

孔徑	鍵槽規格 寬 x 高	螺牙
12	4x4	M6
17	5x5	M6
22	6x6	M6
25	(7x7)	M6
30	8x7	M8
38	10x8	M8
44	12x8	M8
50	14x9	M10
55	(15x10)	M10
58	16x10	M10
65	18x11	M10
75	20x12	M12
85	22x14	M12
90	(24x16)	M12
95	25x14	M12
100	28x16	M12
130	32x18	M12
140	(35x22)	M12
150	36x20	M16
160	(38x24)	M16
170	40x22	M16
180	(42x26)	M16
200	45x25	M16


孔徑		鍵槽規格 bx(h)	鍵槽深度	
			軸 t ₁	公差 d+t ₂
10	12	4x4	2.5	d+1.8
12	17	5x5	3	d+2.3
17	22	6x6	3.5	d+2.8
20	25	(7x7)	4	d+3.0
22	30	8x7	4	d+3.3
30	38	10x8	5	d+3.3
38	44	12x8	5	d+3.3
44	50	14x9	5.5	d+3.8
50	55	(15x10)	5	d+5.0
50	58	16x10	6	d+4.3
58	65	18x11	7	d+4.4
65	75	20x12	7.5	d+4.9
75	85	22x14	9	d+5.4
80	90	(24x16)	8	d+8.0
85	95	25x14	9	d+5.4
95	110	28x16	10	d+6.4
110	130	32x18	11	d+7.4
125	140	(35x22)	11	d+11
130	150	36x20	12	d+8.4
140	160	(38x24)	12	d+12
150	170	40x22	13	d+9.4
160	180	(42x26)	13	d+13
170	200	45x25	15	d+10.4
200	230	50x28	17	d+11.4
230	260	56x32	20	d+12.4

鏈齒輪基準齒數參數表


鏈齒輪基準尺寸

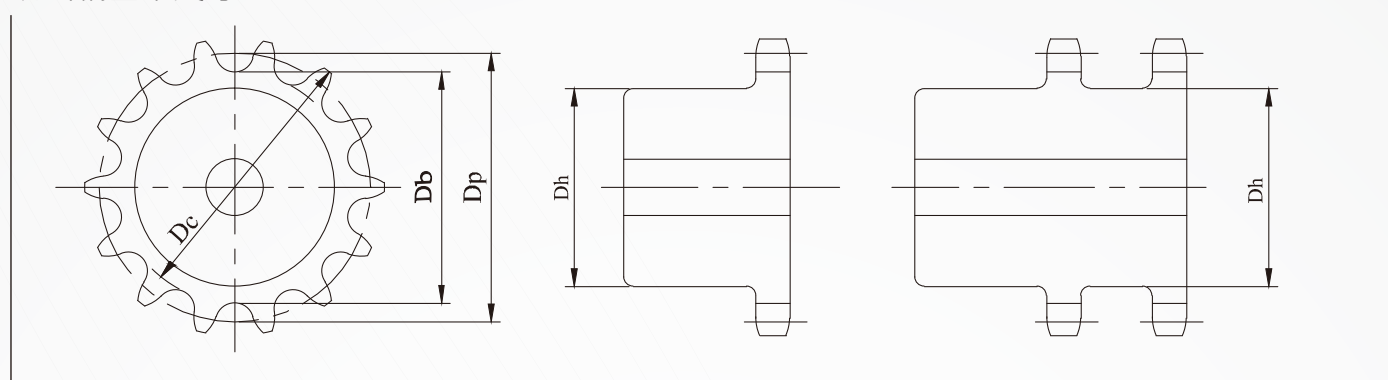

1. 直接測定法

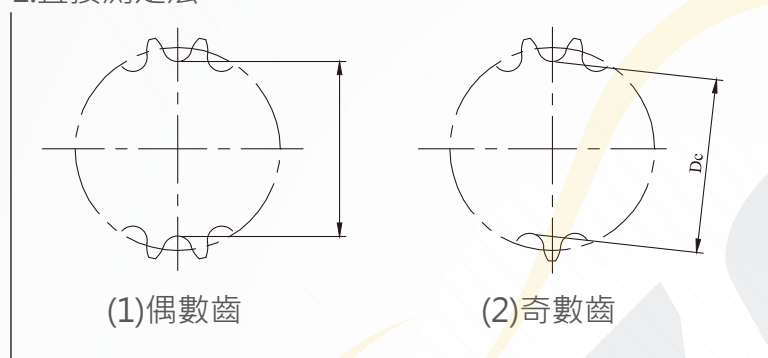

2. 夾銷測定法

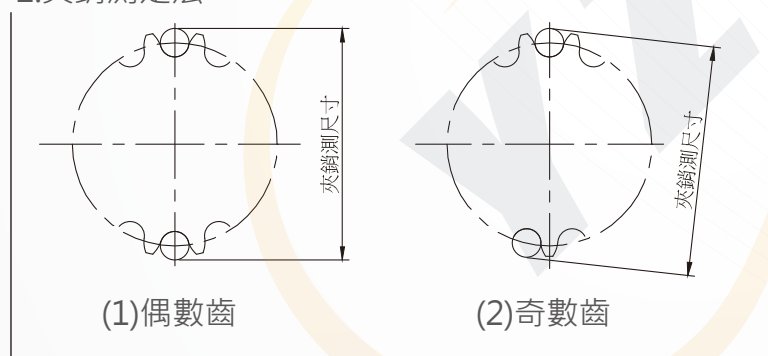


項 目	計 算 公 式
節圓直徑	$Dp = \frac{P}{\sin \frac{180^\circ}{N}}$ (參考參數表)
標準外徑	$Do = P \left(0.6 + \cot \frac{180^\circ}{N} \right)$
偶數齒底距離	$Db = Dp - Dr$
奇數齒底距離	$Dc = Dp \times \cos \frac{90^\circ}{N} - Dr$
最大輪載直徑或最大槽直徑	$Dh = P \left(\cot \frac{180^\circ}{N} - 1 \right) - 0.76$
P=節距 Dr=滾子外徑 N=齒數	
註	$\frac{1}{2 \sin \frac{180^\circ}{2N}} = \text{齒根距離系數}$ (參考參數表)

各鏈輪之節距& 滾子直徑

規格	RS25	RS35	RS40	RS50	RS60	RS80	RS100	RS120	RS140	RS160	RS180	RS200	RS240
節距 (P)	6.35	9.525	12.7	15.875	19.05	25.4	31.75	38.1	44.45	50.8	57.15	63.5	76.2
滾子直徑 Dr	3.3	5.08	7.95	10.16	11.91	15.88	19.05	22.23	25.4	28.58	35.71	39.68	47.63

輪轂型式(一般常用之形式)

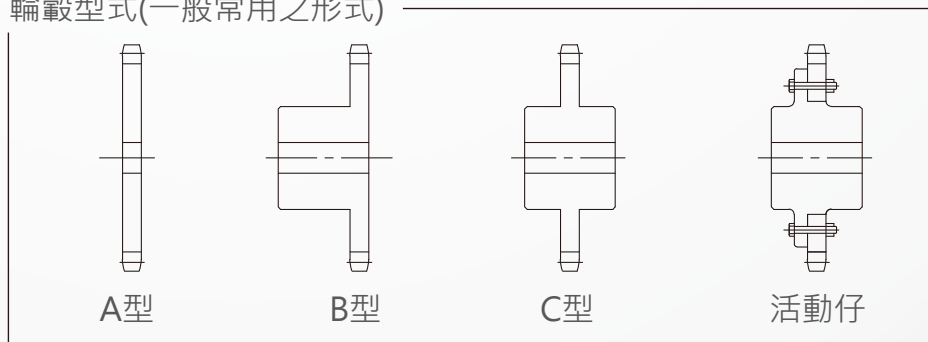

鏈齒輪基準齒數參數表

求鏈齒輪・節圓・外徑・奇數齒底直徑・最大輪轂直徑參數

齒數	節圓直徑 Dp	外徑 Do	奇數齒底直徑 Dc	最大轂直徑 Dh	齒數	節圓直徑 Dp	外徑 Do	奇數齒底直徑 Dc	最大轂直徑 Dh
7	2.3048	2.676	2.247	1.076	64	20.38	20.956	-	19.535
8	2.6131	3.014	-	1.414	65	20.6982	21.274	20.6922	19.674
9	2.9238	3.348	2.8794	1.747	66	21.0164	21.593	-	19.993
10	3.2361	3.678	-	2.077	67	21.3346	21.911	21.3287	20.311
11	3.5495	4.006	3.5133	2.406	68	21.6528	22.23	-	20.63
12	3.8637	4.332	-	2.732	69	21.971	22.248	21.9653	20.948
13	4.1786	4.657	4.1481	3.057	70	22.2892	22.867	-	21.267
14	4.494	4.981	-	3.381	71	22.6074	23.185	22.6018	21.585
15	4.8097	5.304	4.7834	3.705	72	22.9256	23.504	-	21.904
16	5.1258	5.627	-	4.027	73	23.2438	23.822	23.2384	22.222
17	5.4422	5.949	5.419	4.35	74	23.562	24.141	-	22.541
18	5.7588	6.271	-	4.671	75	23.8802	24.459	23.875	22.859
19	6.0755	6.593	6.0548	4.993	76	24.1984	24.778	-	23.178
20	6.3925	6.914	-	5.314	77	24.5167	25.096	24.5116	23.496
21	6.7095	7.235	6.6907	5.635	78	24.8349	25.415	-	23.815
22	7.0267	7.555	-	5.955	79	25.1531	25.733	25.1481	24.133
23	7.3439	7.876	7.3268	6.276	80	25.4713	26.052	-	24.452
24	7.6613	8.196	-	6.596	81	25.7896	26.37	25.7874	24.77
25	7.9787	8.516	7.963	6.916	82	26.1078	26.689	-	25.089
26	8.2962	8.836	-	7.236	83	26.4261	27.007	26.4213	25.407
27	8.6138	9.156	8.5992	7.556	84	26.7443	27.326	-	25.726
28	8.9314	9.475	-	7.875	85	27.0625	27.644	27.058	26.044
29	9.2491	9.795	9.2355	8.195	86	27.3807	27.962	-	26.362
30	9.5668	10.114	-	8.514	87	27.699	28.281	27.6945	26.681
31	9.8845	10.434	9.8718	8.834	88	28.0172	28.599	-	26.999
32	10.2023	10.753	-	9.153	89	28.3355	28.918	28.331	27.318
33	10.5201	11.073	10.5082	9.472	90	28.6537	29.236	-	27.636
34	10.838	11.392	-	9.792	91	28.972	29.555	28.9676	27.955
35	11.1558	11.711	11.1446	10.111	92	29.2902	29.873	-	28.273
36	11.4737	12.03	-	10.43	93	29.6085	30.192	29.6042	28.592
37	11.7916	12.349	11.781	10.749	94	29.9267	30.51	-	28.91
38	12.1096	12.668	-	11.068	95	30.2449	30.828	30.2408	29.228
39	12.4275	12.987	12.4174	11.387	96	30.5632	31.147	-	29.547
40	12.7455	13.306	-	11.706	97	30.8815	31.465	30.8774	29.865
41	13.0635	13.625	13.0539	12.025	98	31.1997	31.784	-	30.184
42	13.3815	13.944	-	12.344	99	31.518	32.102	31.514	30.502
43	13.6995	14.263	13.6904	12.663	100	31.8362	32.421	-	30.821
44	14.0175	14.582	-	12.982	101	32.1545	32.739	32.1506	31.139
45	14.3356	14.901	14.3269	13.301	102	32.4727	33.057	-	31.457
46	14.6536	15.219	-	13.619	103	32.791	33.375	32.7872	31.776
47	14.9717	15.538	14.9634	13.938	104	33.1093	33.694	-	32.094
48	15.2898	15.857	-	14.257	105	33.4275	34.012	33.4238	32.413
49	15.6079	16.176	15.5999	14.576	106	33.7458	34.33	-	32.731
50	15.926	16.495	-	14.895	107	34.0641	34.649	34.0604	33.049
51	16.2441	16.813	16.2364	15.213	108	34.3823	34.967	-	33.368
52	16.5622	17.132	-	15.532	109	34.7006	35.286	34.697	33.686
53	16.8803	17.451	16.8729	15.851	110	35.0188	35.604	-	34.005
54	17.1984	17.769	-	16.169	111	35.3371	35.922	35.3336	34.323
55	17.5166	18.088	17.5094	16.488	112	35.6554	36.241	-	34.641
56	17.8347	18.407	-	16.807	113	35.9737	36.559	35.9702	34.96
57	18.1529	18.725	18.146	17.125	114	36.2919	36.878	-	35.278
58	18.471	19.044	-	17.444	115	36.6102	37.196	36.6068	35.597
59	18.7892	19.363	18.7825	17.763	116	36.9285	37.514	-	35.915
60	19.1073	19.681	-	18.081	117	37.2467	37.833	37.2434	36.233
61	19.4255	20	19.419	18.4	118	37.565	38.151	-	36.552
62	19.7437	20.318	-	18.718	119	37.8833	38.47	37.88	36.87
63	20.0618	20.637	20.0556	19.037	120	38.2016	38.788	-	37.188

公式 1.偶數齒底距離=(節距Px參數Dp)-滾子直徑Dr 2.基數齒底距離=(節距Px參數Dc)-滾子直徑Dr 3.最大輪轂直徑Dh=(節距Px參數)